




PRODUCT DATA SHEET
X-Clean 21000lm 840 90° 150W GR
Art.no: 6803-02-1



X-Clean 21000lm 840 90° 150W GR

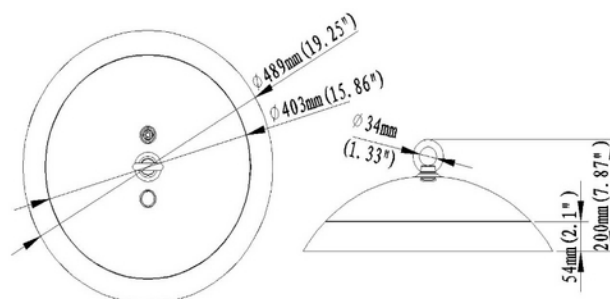

X-Clean er en armatur designet for bruk i storkjøkken, industrikjøkken og matindustrien. Med et rent og glatt design er X-Clean enkel å rengjøre.. X-Clean har høyt lysutbytte, er glassfri og har tildekket lyskilde. IK10 og IP69 klassifisering gjør at armaturen kan spyles med høytrykkspyler. Kan leveres med DALI styring, Zigbee styring eller bevegelsens sensor. Tilgjengelig tilbehør: Sikkerhetslenke/kjetting Takmontering

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK10
IP (system)	IP69
Outdoor	Yes
Operating temperature (°C)	-30 - 50



PHOTOMETRIC DATA	
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	4000
Color Code	840
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lifetime (h)	L80B50: 100 000
Manufacturer (light source)	Nichia

DRIVER	
Manufacturer (driver)	Inventronics
Protection Class (driver)	1
Standby power Psb (W) <	0.5
Flicker metric (Pst LM) <	0.007
Stroboscopic effect metric (SVM) <	0.019
Max Output Voltage (V)	54
Dimming (driver)	1-10V
Dimming Minimum Level (%)	10.0
Dimming output type	Amplitude Modulation
IP (driver)	IP67
Expected Lifetime (driver) (h)	90000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	2800 - 4200
Current setting (driver)	None
CC (forward voltage driver) (V)	18.0 - 54.0
CV (driver) [V]	48
Output Current Tolerance (%)	5.0
Max load pr circuit - B10	11
Max load pr circuit - B16	19
Max load pr circuit - C10	13
Max load pr circuit - C16	22
Max load pr circuit - C20	27
Max load pr circuit - C25	34
Leakage current (mA)	0.75
Inrush current time (µs)	92.0



PRODUCT DATA SHEET
X-Clean 21000lm 840 90° 150W GR
Art.no: 6803-02-1



DRIVER	
Inrush current I _{max} (A)	111.0

DIMENSIONS	
Width (product) (mm)	489.0
Height (product) (mm)	200.0
Weight (product) (kg)	7.3

MATERIALS AND SURFACES	
Color	Grey
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Generally, Industrial
Mounting	Surface, Suspended, Ceiling
Connection (system)	Cable 1.5m

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A+