




PRODUCT DATA SHEET
X-Clean 28000lm 840 90° 200W GR
Art.no: 6804-02-1



Lighting Solutions

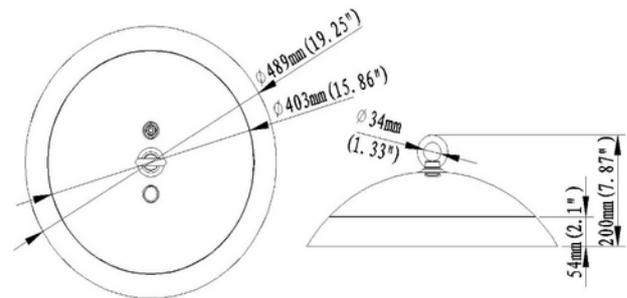

X-Clean 28000lm 840 90° 200W GR



X-Clean er en armatur designet for bruk i storkjøkken, industrikjøkken og matindustrien. Med et rent og glatt design er X-Clean enkel å rengjøre.. X-Clean har høyt lysutbytte, er glassfri og har tildekket lyskilde. IK10 og IP69 klassifisering gjør at armaturen kan spyles med høytrykkspyler. Kan leveres med DALI styring, Zigbee styring eller bevegelsens sensor. Tilgjengelig tilbehør: Sikkerhetslenke/kjetting Takmontering

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK10
IP (system)	IP69
Outdoor	Yes
Operating temperature (°C)	-30 - 50



PHOTOMETRIC DATA	
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	4000
Color Code	840
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lifetime (h)	L80B50: 100 000
Manufacturer (light source)	Nichia

DRIVER	
Manufacturer (driver)	Mean Well
Protection Class (driver)	1
IP (driver)	IP65
Expected Lifetime (driver) (h)	62000
Constant current or voltage (CC or CV)	CV+CC
CC (driver) [mA]	2500 - 5000
CC (forward voltage driver) (V)	24.0 - 48.0
CV (driver) [V]	48
Max load pr circuit - B10	1
Max load pr circuit - B16	2
Max load pr circuit - C10	3
Max load pr circuit - C16	4
Max load pr circuit - C20	5
Leakage current (mA)	0.75
Inrush current time (μ s)	570.0
Inrush current I _{max} (A)	75.0

DIMENSIONS	
Width (product) (mm)	489.0
Height (product) (mm)	200.0
Weight (product) (kg)	7.3

MATERIALS AND SURFACES	
Color	Grey
Housing Material	Aluminium



PRODUCT DATA SHEET
X-Clean 28000lm 840 90° 200W GR
Art.no: 6804-02-1



Lighting Solutions

INSTALLATION AND CONNECTION	
Areas of use	Generally, Industrial
Mounting	Surface, Suspended, Ceiling
Connection (system)	Cable 1.5m

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A+