


**PRODUCT DATA SHEET**

Leila C Midi 2450lm 830 67° 16W w/o driver cut out Ø165mm WH

Art.no: 6920-67-3

*Lighting Solutions*

Ø 165mm

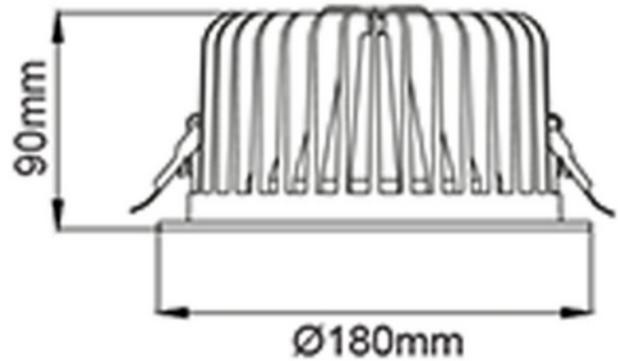

## Leila C Midi 2450lm 830 67° 16W w/o driver cut out Ø165mm WH



Leila C Midi is a highly efficient downlight with 126 lm/W. With wide beam angle and rotationally symmetric light distribution, it's suitable for all place that requires high lumen output. Can be delivered with on / off, phasecut or DALI2 driver. See accessories for suitable driver.

ELECTRICAL DATA	
Protection Class (system)	3
Dimming (system)	Depending on Driver
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-25 - 50

**PRODUCT DATA SHEET**

Leila C Midi 2450lm 830 67° 16W w/o driver cut out Ø165mm WH

Art.no: 6920-67-3

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	126
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
UGR (<=)	21
Manufacturer (light source)	Tridonic

DIMENSIONS	
Width (product) (mm)	180.0
Height (product) (mm)	120.0
Weight (product) (kg)	1.1

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Generally, Hotel, Office, School, Showroom
Mounting	Recessed, Ceiling
Connection (system)	Depending on driver

ENERGY AND CERTIFICATIONS	
CE mark	Yes
EPD number	NEPD-14106-14439
Energy Efficiency Class	A++ - A



**PRODUCT DATA SHEET**

Leila C Midi 2450lm 830 67° 16W w/o driver cut out Ø165mm WH

Art.no: 6920-67-3



*Lighting Solutions*

**LIGHT DISTRIBUTION**

