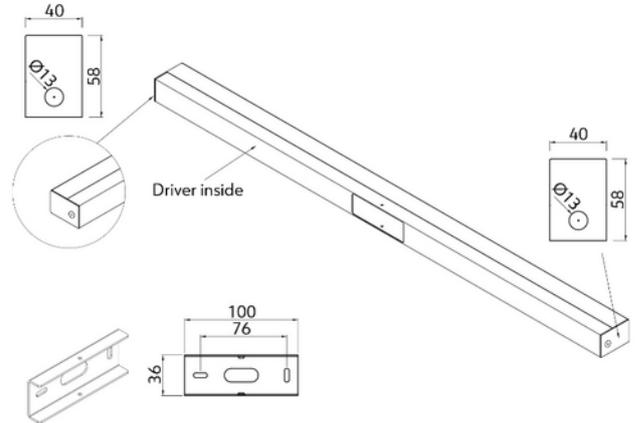


**PRODUCT DATA SHEET**

Paris Wall 770lm 930 15W IP44 BK phasecut

Art.no: 6998-2-01-2

*Lighting Solutions*

Paris Wall 770lm 930 15W IP44 BK phasecut



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP44
Outdoor	No

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000
Color Code	930
Lens (Diffuser)	Opal

**PRODUCT DATA SHEET**

Paris Wall 770lm 930 15W IP44 BK phasecut

Art.no: 6998-2-01-2

*Lighting Solutions*

DRIVER	
Manufacturer (driver)	SC Power
Protection Class (driver)	2
Dimming Minimum Level (%)	0.0
Dimming Phasecut Type	Leading / Trailing edge
IP (driver)	IP20
Constant current or voltage (CC or CV)	CV
CV (driver) [V]	12
Leakage current (mA)	0.5
Inrush current time (μ s)	104.0
Inrush current I _{max} (A)	34.0

DIMENSIONS	
Length (product) (mm)	1200.0
Width (product) (mm)	40.0
Height (product) (mm)	58.0

MATERIALS AND SURFACES	
Color	Black

INSTALLATION AND CONNECTION	
Areas of use	Bathroom, Cottage, Generally, Hotel, Residence
Mounting	Wall
Connection (system)	QuickConnect

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A