
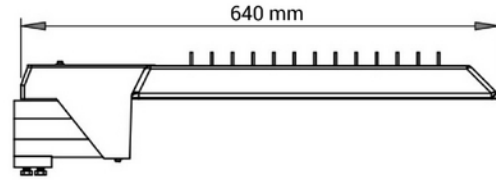


**PRODUCT DATA SHEET**

Via 10 407lm 740 79W Asymmetric IP66 GR

Art.no: 714-2-04-1

*Lighting Solutions*

Via 10 407lm 740 79W Asymmetric IP66 GR



Via is a luminaire for post mounting. We have developed this luminaire with an asymmetrical reflector giving a wide spread light, see light distribution diagram below. Via has a post fixation opening with a diameter of 60mm. The luminaire has an IP66 classification and this guarantees that it will withstand very demanding conditions.

ELECTRICAL DATA	
Protection Class (system)	1
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP66
Outdoor	Yes
Operating temperature (°C)	-25 - 40

**PRODUCT DATA SHEET**

Via 10 407lm 740 79W Asymmetric IP66 GR

Art.no: 714-2-04-1

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	112
CRI / Ra (>=)	70
CCT (Color Temperature) (K)	4000
Color Code	740
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L90B10: 100 000
Manufacturer (light source)	Osram

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1 or 2
Max Output Voltage (V)	140
IP (driver)	IP20
Expected Lifetime (driver) (h)	100000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	300 - 1050
CC (forward voltage driver) (V)	40.0 - 114.2
Output Current Tolerance (%)	7.5
Current Ripple (%)	5.0
Max load pr circuit - B10	3
Max load pr circuit - B16	7
Max load pr circuit - C10	6
Max load pr circuit - C16	14
Leakage current (mA)	0.5
Inrush current time (µs)	280.0
Inrush current I _{max} (A)	56.0

DIMENSIONS	
Length (product) (mm)	640.0
Width (product) (mm)	242.0
Height (product) (mm)	146.0
Weight (product) (kg)	7.0



PRODUCT DATA SHEET

Via 10 407lm 740 79W Asymmetric IP66 GR

Art.no: 714-2-04-1



Lighting Solutions

MATERIALS AND SURFACES

Color	Grey
-------	------

INSTALLATION AND CONNECTION

Areas of use	Outdoor, Sports areas, Street
Mounting	Wall, Mast
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS

CE mark	Yes
Energy Efficiency Class	A++

LIGHT DISTRIBUTION

