


**PRODUCT DATA SHEET**

Antlia C 1858lm 840 Opal 40° 16W IP44 WH Surface
Art.no: 735-40-3



Lighting Solutions

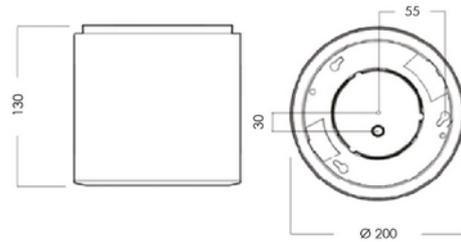

Antlia C 1858lm 840 Opal 40° 16W IP44 WH Surface



ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK04
IP (system)	IP44
Outdoor	No
Operating temperature (°C)	0 - 35

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	116
CRI / Ra (>=)	80

**PRODUCT DATA SHEET**

Antlia C 1858lm 840 Opal 40° 16W IP44 WH Surface

Art.no: 735-40-3

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	4000
Color Code	840
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Opal
Lifetime (h)	L80B50: 75 000

DRIVER	
Manufacturer (driver)	Osram
Protection Class (driver)	1 or 2
Flicker metric (Pst LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Max Output Voltage (V)	60
Dimming (driver)	None
IP (driver)	IP20
CC (forward voltage driver) (V)	23.0 - 42.0
Output Current Tolerance (%)	6.5
Current Ripple (%)	5.0
Max load pr circuit - B10	38
Max load pr circuit - B16	60
Max load pr circuit - C10	57
Max load pr circuit - C16	91
Inrush current time (µs)	50.0
Inrush current I _{max} (A)	4.0

DIMENSIONS	
Width (product) (mm)	200.0
Height (product) (mm)	130.0
Weight (product) (kg)	1.35

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Hotel, Open access areas, Shop, Showroom

**PRODUCT DATA SHEET**

Antlia C 1858lm 840 Opal 40° 16W IP44 WH Surface
Art.no: 735-40-3



Lighting Solutions

INSTALLATION AND CONNECTION	
Mounting	Surface, Ceiling
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++

LIGHT DISTRIBUTION