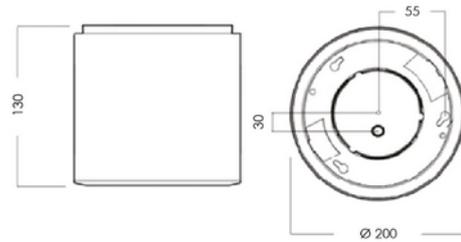


**PRODUCT DATA SHEET**

Antlia C 2550lm 830 40° 23W BK DALI

Art.no: 746-40-2-ddd

*Lighting Solutions*

## Antlia C 2550lm 830 40° 23W BK DALI



ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	DALI
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK04
IP (system)	IP44
Outdoor	No
Operating temperature (°C)	0 - 35

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	106
CRI / Ra (>=)	80

**PRODUCT DATA SHEET**

Antlia C 2550lm 830 40° 23W BK DALI

Art.no: 746-40-2-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Opal
Lifetime (h)	L80B50: 50 000

DIMENSIONS	
Width (product) (mm)	200.0
Height (product) (mm)	130.0
Weight (product) (kg)	1.15

MATERIALS AND SURFACES	
Color	Black

INSTALLATION AND CONNECTION	
Areas of use	Hotel, Open access areas, Shop, Showroom
Mounting	Surface, Ceiling
Connection (system)	QuickConnect

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++



**PRODUCT DATA SHEET**

Antlia C 2550lm 830 40° 23W BK DALI

Art.no: 746-40-2-ddd



*Lighting Solutions*

**LIGHT DISTRIBUTION**

