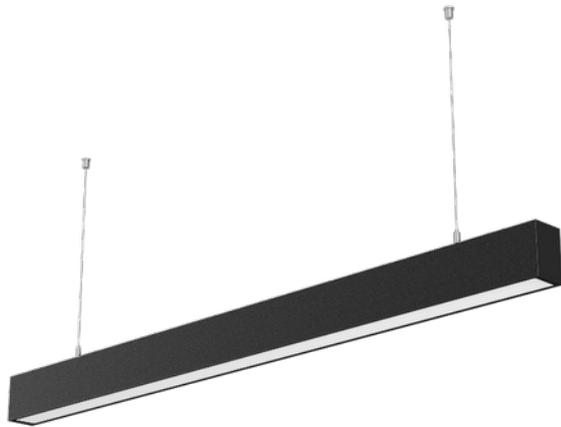


**PRODUCT DATA SHEET**

Ledline 4400lm 830 Opal 40W L:1200mm BK

Art.no: 805002-02-2

*Lighting Solutions*

Ledline 4400lm 830 Opal 40W L:1200mm BK



LEDline is a modern linear LED system for seamless lighting. It is based on modular chassis details allowing for seamless extensions through both straight connectors, 90 degrees corners and X-crosses. This allows light designers to make tailor fit lighting systems in an easy manner. The chassis details assure easy installation without failures. Add 1 pc 8050-05 for each mains supply (each row or standalone). Also add mounting accessories.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP40
Outdoor	No

**PRODUCT DATA SHEET**

Ledline 4400lm 830 Opal 40W L:1200mm BK

Art.no: 805002-02-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	92
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Opal
Lifetime (h)	L80B10: 100 000
Manufacturer (light source)	Runlite
Forward Voltage LED (max tp=25) (V)	48.0
Driftspenning LED (min tp=65) (V)	32.0

DRIVER	
Manufacturer (driver)	Lifud
Protection Class (driver)	1
Max Output Voltage (V)	55
IP (driver)	IP20
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	1000 - null
CC (forward voltage driver) (V)	33.0 - 42.0
Output Current Tolerance (%)	5.0
Max load pr circuit - B10	10
Max load pr circuit - B16	17
Max load pr circuit - C10	17
Max load pr circuit - C16	28
Max load pr circuit - C20	35
Max load pr circuit - C25	44
Leakage current (mA)	5.0
Inrush current time (μ s)	350.0
Inrush current I _{max} (A)	60.0

DIMENSIONS	
Length (product) (mm)	1200.0
Width (product) (mm)	56.0
Height (product) (mm)	84.0

**PRODUCT DATA SHEET**

Ledline 4400lm 830 Opal 40W L:1200mm BK

Art.no: 805002-02-2

*Lighting Solutions***DIMENSIONS**

Weight (product) (kg)	3.24
-----------------------	------

MATERIALS AND SURFACES

Color	Black
-------	-------

INSTALLATION AND CONNECTION

Areas of use	Generally, Industrial, Shop
Mounting	Recessed, Surface, Ceiling, Pendant
Connection (system)	LEDLine 5-pin

ENERGY AND CERTIFICATIONS

CE mark	Yes
EPD number	NEPD-14227-14576
Energy Efficiency Class	A++ - A