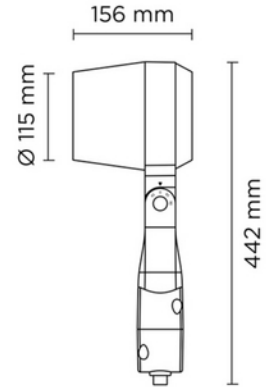
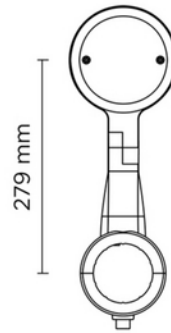


**PRODUCT DATA SHEET**

Ring Pole Medium 830 16W Ø60mm RAL3009

Art.no: 807002

*Lighting Solutions*

Ring Pole Medium 830 16W Ø60mm RAL3009



This outdoor floodlight is designed for pole installation with a diameter of either 60 mm. Featuring a 355° swivel pole attachment, it allows for extensive movement and offers horizontal adjustment within a range of +90° to -40°. The construction includes a base and head made of phosphochromatised and polyester powder-coated die-cast copper-free aluminum, ensuring durability and resistance to corrosion. This variant is painted in color RAL3009. The light source is safeguarded by tempered safety glass, and the entire unit is sealed with moulded silicone gaskets and O-rings, all secured with stainless steel screws. The swivel pole joint is equipped with a graduated scale for precision and a mechanical aiming lock for secure positioning. Illumination is provided by a COB CREE "CXB 1512" LED, and the unit includes a built-in LED driver. With an IP66 rating, this floodlight offers robust protection against dust and water ingress, making it suitable for various outdoor applications.

ELECTRICAL DATA	
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP66

**PRODUCT DATA SHEET**

Ring Pole Medium 830 16W Ø60mm RAL3009

Art.no: 807002

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830

DIMENSIONS	
Length (product) (mm)	156.0
Width (product) (mm)	115.0
Height (product) (mm)	422.0
Weight (product) (kg)	3.0

MATERIALS AND SURFACES	
Color	RAL3009
RAL Code	RAL3009

INSTALLATION AND CONNECTION	
Areas of use	Outdoor, Parking, Street
Mounting	Mast
Connection (system)	Cable