


**PRODUCT DATA SHEET**

Trunk EMG 6300lm 830 D.Asym 35W WH

Art.no: CFL-1535-E-30DS-08-3

*Lighting Solutions*

Unit: mm

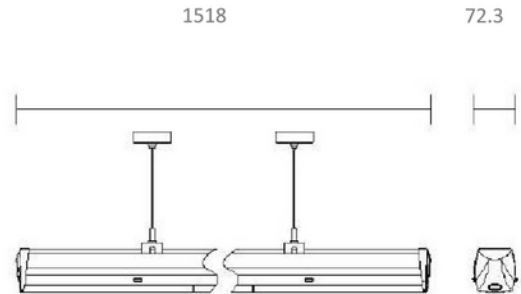

Trunk EMG 6300lm 830 D.Asym 35W WH



Batteries for emergency: 1 year warranty

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz
Emergency light (h)	3 hours

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000

**PRODUCT DATA SHEET**

Trunk EMG 6300lm 830 D.Asym 35W WH

Art.no: CFL-1535-E-30DS-08-3

*Lighting Solutions*

PHOTOMETRIC DATA	
Color Code	830
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
Emergency lumen out (lm)	960

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1 or 2
Max Output Voltage (V)	250
IP (driver)	IP20
Expected Lifetime (driver) (h)	100000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - 500
Current setting (driver)	ADV Plug (Tridonic)
CC (forward voltage driver) (V)	35.0 - 75.0
Output Current Tolerance (%)	7.5
Current Ripple (%)	5.0
Max load pr circuit - B10	24
Max load pr circuit - B16	38
Max load pr circuit - C10	40
Max load pr circuit - C16	63
Leakage current (mA)	0.45
Inrush current time (μ s)	250.0
Inrush current I _{max} (A)	15.0

DIMENSIONS	
Length (product) (mm)	1500.0
Width (product) (mm)	72.3
Height (product) (mm)	78.6
Weight (product) (kg)	1.64

MATERIALS AND SURFACES	
Color	White

**PRODUCT DATA SHEET**

Trunk EMG 6300lm 830 D.Asym 35W WH

Art.no: CFL-1535-E-30DS-08-3

*Lighting Solutions*

INSTALLATION AND CONNECTION	
Areas of use	Generally, Industrial
Mounting	Suspended, Ceiling
Connection (system)	Trunk 8-wires

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++

ALTERNATIVE DRIVERS	
Current Setting (mA) ?	600

LIGHT DISTRIBUTION