


**PRODUCT DATA SHEET**

Trunk 9000lm 830 Wide 90° 50W WH DALI

Art.no: CFL-2-1550-30WD-08-3-DA

*Lighting Solutions*

Unit: mm

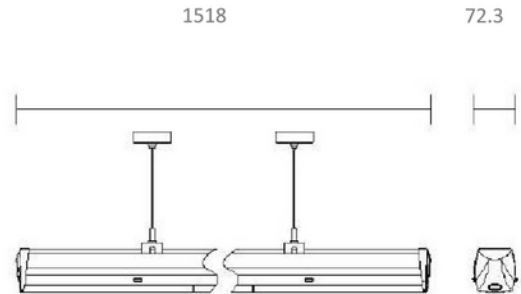

Trunk 9000lm 830 Wide 90° 50W WH DALI



Trunk is a premium quality and highly advanced linear pendant light system offering continuous light distribution. We offer a variety of accessories securing easy installation and various layouts ensuring a natural like lighting to any area. The Trunk light fixtures are manufactured in ultra-thin steel plates securing a long-life product. The Trunk fixtures are delivered with all needed installation details in one box and no tools are needed for the installation. Change effect on luminaire by DIP-Switch on drive

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

**PRODUCT DATA SHEET**

Trunk 9000lm 830 Wide 90° 50W WH DALI

Art.no: CFL-2-1550-30WD-08-3-DA

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	152
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000

DRIVER	
Flicker-free	Yes
Max load pr circuit - B10	11
Max load pr circuit - B16	17
Max load pr circuit - C10	18
Max load pr circuit - C16	28
Max load pr circuit - C20	35
Max load pr circuit - C25	44
Inrush current time (μ s)	264.0
Inrush current I _{max} (A)	21.8

DIMENSIONS	
Length (product) (mm)	1500.0
Width (product) (mm)	72.3
Height (product) (mm)	78.6
Weight (product) (kg)	1.64

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Generally, Industrial
Mounting	Suspended, Ceiling
Connection (system)	Trunk 8-wires

**PRODUCT DATA SHEET**

Trunk 9000lm 830 Wide 90° 50W WH DALI

Art.no: CFL-2-1550-30WD-08-3-DA

*Lighting Solutions*

ENERGY AND CERTIFICATIONS	
CE mark	Yes
EPD number	NEPD-12260-12311
Energy Efficiency Class	A++

ALTERNATIVE DRIVERS	
Current Setting (mA) ?	600

LIGHT DISTRIBUTION