


**PRODUCT DATA SHEET**

Trunk 9000lm 830 Wide 90° 50W/46,5W/43W/36W/29W WH
 Art.no: CFL-2-1550-30WD-08-3

*Lighting Solutions*

Unit: mm

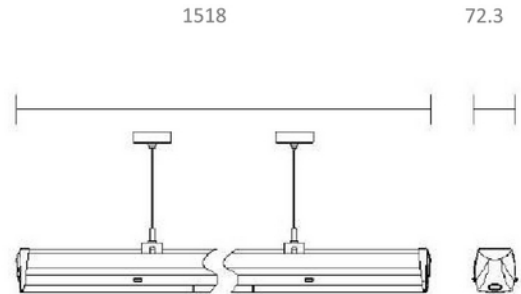

Trunk 9000lm 830 Wide 90° 50W/46,5W/43W/36W/29W WH



Trunk is a premium quality and highly advanced linear pendant light system offering continuous light distribution. We offer a variety of accessories securing easy installation and various layouts ensuring a natural like lighting to any area. The Trunk light fixtures are manufactured in ultra-thin steel plates securing a long-life product. The Trunk fixtures are delivered with all needed installation details in one box and no tools are needed for the installation. Change effect on luminaire by DIP-Switch on driver. Choose between 50W, 43W, and 36W.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

**PRODUCT DATA SHEET**

Trunk 9000lm 830 Wide 90° 50W/46,5W/43W/36W/29W WH

Art.no: CFL-2-1550-30WD-08-3

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	177
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000

DRIVER	
Manufacturer (driver)	Coreshine
Flicker-free	Yes

DIMENSIONS	
Length (product) (mm)	1500.0
Width (product) (mm)	72.3
Height (product) (mm)	78.6
Weight (product) (kg)	1.64

MATERIALS AND SURFACES	
Color	White
RAL Code	RAL9016

INSTALLATION AND CONNECTION	
Areas of use	Generally, Industrial
Mounting	Suspended, Ceiling
Connection (system)	Trunk 8-wires

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	C
CE mark	Yes
EPD number	NEPD-12260-12311
Energy Efficiency Class	A++



PRODUCT DATA SHEET

Trunk 9000lm 830 Wide 90° 50W/46,5W/43W/36W/29W WH
Art.no: CFL-2-1550-30WD-08-3



Lighting Solutions

ALTERNATIVE DRIVERS	
Current Setting (mA) ?	600

LIGHT DISTRIBUTION

