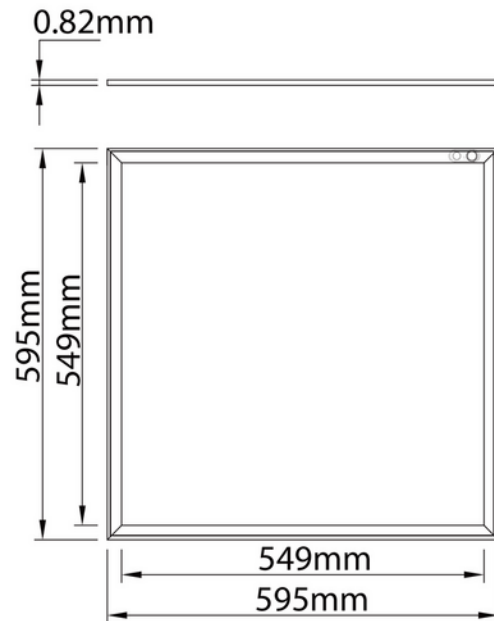



**PRODUCT DATA SHEET**

Panel NWC 595x595 5100lm 930 36W Prism WH PIR+Daylight 18i3

Art.no: 0385-NW-02-3

*Lighting Solutions*

Panel NWC 595x595 5100lm 930 36W Prism WH PIR+Daylight 18i3



LED Panel is a luminaire for indoor use. With Norlux Wireless Connect integrated into the luminaire, you have modern lighting control technology without the need for additional cabling. It is designed for installation in system ceilings, suspended by a wire system, or with a mounting frame so the panel can be mounted on ceiling surfaces.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	PWM, 1-10V
Voltage (system) [V]	230V 50Hz
Lightsource Max. Power (W) if Socket	40w

TECHNICAL DATA	
IK (system)	IK06
IP (system)	IP40
Outdoor	No

**PRODUCT DATA SHEET**

Panel NWC 595x595 5100lm 930 36W Prism WH PIR+Daylight 18i3

Art.no: 0385-NW-02-3

*Lighting Solutions*

TECHNICAL DATA	
Operating temperature (°C)	-20 - 40

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	120
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Lens (Diffuser)	Micropris.
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
UGR (<=)	19
Manufacturer (light source)	Runlite
Forward Voltage LED (max tp=25) (V)	3.4
Driftspenning LED (min tp=65) (V)	3.0

DRIVER	
Flicker-free	Yes

CONTROL SYSTEM	
Norlux Wireless Connect	Compatible
Mesh	Yes
System	NWC

DIMENSIONS	
Length (product) (mm)	595.0
Width (product) (mm)	8.0
Height (product) (mm)	595.0

MATERIALS AND SURFACES	
Color	White
RAL Code	RAL9003
Housing Material	Steel

**PRODUCT DATA SHEET**

Panel NWC 595x595 5100lm 930 36W Prism WH PIR+Daylight 18i3

Art.no: 0385-NW-02-3

*Lighting Solutions*

INSTALLATION AND CONNECTION	
Areas of use	Generally, Hotel, School, Shop
Mounting	Recessed, Ceiling
Connection (system)	Cable

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	E
CE mark	Yes
EPD number	NEPD-14297-14692