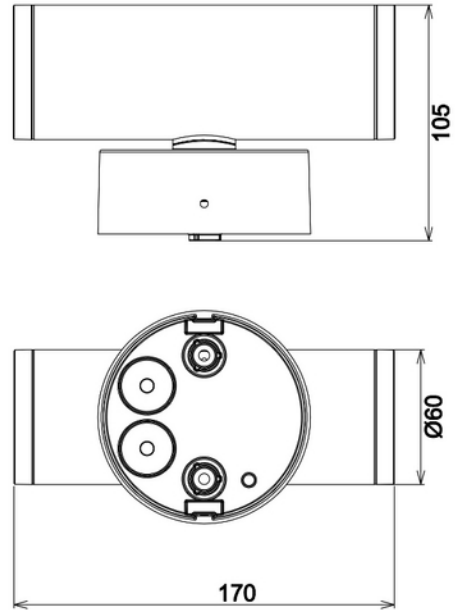


**PRODUCT DATA SHEET**

Gyre Up&Down 800lm 830 24° 10W BK

Art.no: 101520-24-2

*Lighting Solutions*

Gyre Up&Down 800lm 830 24° 10W BK



Wall mounted luminaire with up / downlight for outdoors use. Delivered with 3000K and 24° beam angle. Made of die-cast aluminum.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK06
IP (system)	IP65
Outdoor	Yes
Operating temperature (°C)	-20 - 40

**PRODUCT DATA SHEET**

Gyre Up&Down 800lm 830 24° 10W BK

Art.no: 101520-24-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	76
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 50.000
MacAdam (SDCM)	3

DRIVER	
Manufacturer (driver)	Up-Shine
CC (driver) [mA]	230 - null
CC (forward voltage driver) (V)	40.0 - null
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0
Max load pr circuit - B10	95
Max load pr circuit - B16	152
Max load pr circuit - C10	90
Max load pr circuit - C16	152
Leakage current (mA)	0.75
Inrush current time (µs)	65.0
Inrush current I _{max} (A)	6.2

DIMENSIONS	
Length (product) (mm)	105.0
Width (product) (mm)	60.0
Height (product) (mm)	170.0
Weight (product) (kg)	0.6

MATERIALS AND SURFACES	
Color	Black
RAL Code	RAL9005

INSTALLATION AND CONNECTION	
Areas of use	Outdoor

**PRODUCT DATA SHEET**

Gyre Up&Down 800lm 830 24° 10W BK

Art.no: 101520-24-2

*Lighting Solutions***INSTALLATION AND CONNECTION**

Mounting	Wall
Connection (system)	QuickConnect

ENERGY AND CERTIFICATIONS

Energy Class EPREL	E
CE mark	Yes
Energy Efficiency Class	A++ - A

LIGHT DISTRIBUTION