




**PRODUCT DATA SHEET**

Benu Slim 6700lm 930 140/90° 50W BK 2xDALI 5P-WAGO(Tridonic)  
Art.no: 102523-140-2-ddd



*Lighting Solutions*

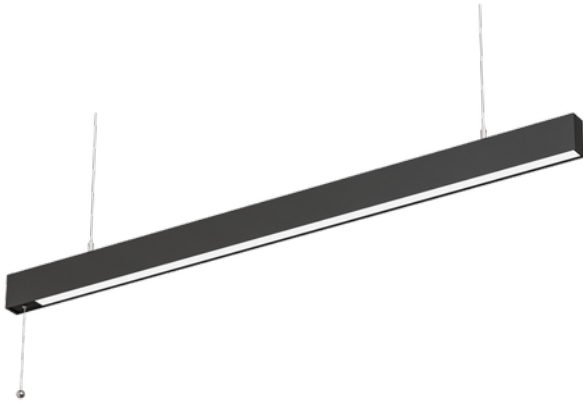

## Benu Slim 6700lm 930 140/90° 50W BK 2xDALI 5P-WAGO(Tridonic)



ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK02
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-20 - 45

**PRODUCT DATA SHEET**

Benu Slim 6700lm 930 140/90° 50W BK 2xDALI 5P-WAGO(Tridonic)

Art.no: 102523-140-2-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	121
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Micropris.
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
UGR (<=)	19
Forward Current LED (min-max) (mA)	10 - 350
Forward Voltage LED (max tp=25) (V)	3.0
Driftspenning LED (min tp=65) (V)	2.5

DRIVER	
Manufacturer (driver)	Tridonic
Flicker-free	Yes

DIMENSIONS	
Length (product) (mm)	1206.0
Width (product) (mm)	35.0
Height (product) (mm)	70.0
Weight (product) (kg)	2.0

MATERIALS AND SURFACES	
Color	Black
RAL Code	RAL9005
Housing Material	Aluminium 6063
Diffuser Material	PMMA

INSTALLATION AND CONNECTION	
Areas of use	Office



## PRODUCT DATA SHEET

Benu Slim 6700lm 930 140/90° 50W BK 2xDALI 5P-WAGO(Tridonic)

Art.no: 102523-140-2-ddd



*Lighting Solutions*

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	E
CE mark	Yes
Energy Efficiency Class	E

## LIGHT DISTRIBUTION

