




PRODUCT DATA SHEET

Base 6000lm 840 Opal 45W IP69K L=1480mm 3m cable PMMA
Art.no: 10254834



Lighting Solutions

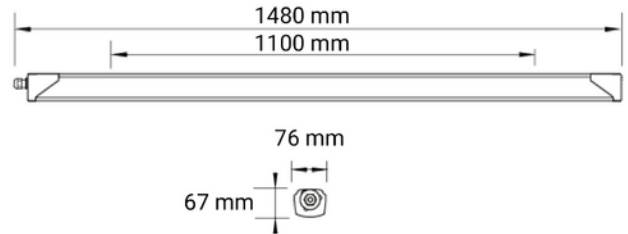

Base 6000lm 840 Opal 45W IP69K L=1480mm 3m cable PMMA



ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK03
IP (system)	IP66-69K
Outdoor	Yes
Operating temperature (°C)	-25 - 35

**PRODUCT DATA SHEET**

Base 6000lm 840 Opal 45W IP69K L=1480mm 3m cable PMMA
Art.no: 10254834



Lighting Solutions

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	136
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	4000
Color Code	840
Lightsource Type	LED (built in)
Lens (Diffuser)	Opal
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3

DRIVER	
Max load pr circuit - B10	15
Max load pr circuit - B16	24
Max load pr circuit - C10	25
Max load pr circuit - C16	40
Max load pr circuit - C20	50
Max load pr circuit - C25	62

DIMENSIONS	
Length (product) (mm)	1480.0
Width (product) (mm)	76.0
Height (product) (mm)	67.0
Weight (product) (kg)	2.3

MATERIALS AND SURFACES	
Color	Grey
RAL Code	RAL7035

INSTALLATION AND CONNECTION	
Areas of use	Car wash, Farm, Industrial, Kitchen
Mounting	Surface, Suspended, Wall
Connection (system)	Cable 3m

ENERGY AND CERTIFICATIONS	
CE mark	Yes



PRODUCT DATA SHEET

Base 6000lm 840 Opal 45W IP69K L=1480mm 3m cable PMMA
Art.no: 10254834



Lighting Solutions

ENERGY AND CERTIFICATIONS	
Energy Efficiency Class	A++ - A

LIGHT DISTRIBUTION

