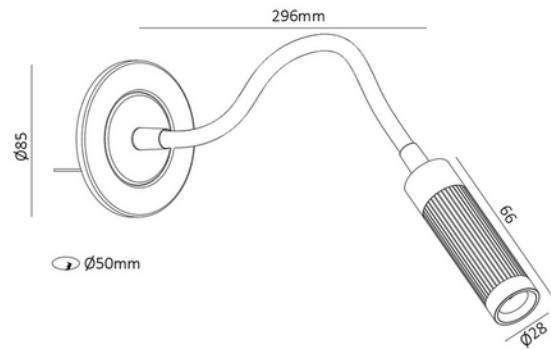


**PRODUCT DATA SHEET**

Giulio G2 4W 3000K recessed flexible copper/antique brass

Art.no: 102860-13

*Lighting Solutions*

Giulio G2 4W 3000K recessed flexible copper/antique brass



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Touch dim
Voltage (system) [V]	230V 50Hz
Lightsource Max. Power (W) if Socket	2.1W

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	38
CRI / Ra (>=)	90

**PRODUCT DATA SHEET**

Giulio G2 4W 3000K recessed flexible copper/antique brass

Art.no: 102860-13

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Lens
MacAdam (SDCM)	3
UGR (<=)	10
Manufacturer (light source)	Osram
Driftspenning LED (min tp=65) (V)	3.0

DRIVER	
Protection Class (driver)	2
Standby power P_{sb} (W) <	0.1
Flicker metric (P_{st} LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Max Output Voltage (V)	5
Dimming (driver)	None
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Flicker-free	Yes
Constant current or voltage (CC or CV)	CV
CV (driver) [V]	5
Output Current Tolerance (%)	10.0
Max load pr circuit - B10	7
Max load pr circuit - B16	11
Max load pr circuit - C10	12
Max load pr circuit - C16	18
Max load pr circuit - C20	22
Max load pr circuit - C25	28
Max load pr circuit - C32	36
Leakage current (mA)	0.7
Inrush current time (μ s)	250.0
Inrush current I_{max} (A)	20.0

**PRODUCT DATA SHEET**

Giulio G2 4W 3000K recessed flexible copper/antique brass

Art.no: 102860-13

*Lighting Solutions*

DIMENSIONS	
Length (product) (mm)	443.0
Weight (product) (kg)	0.4
Diameter (product) (mm)	85.0

MATERIALS AND SURFACES	
Color	Copper/Brass
Housing Material	Aluminium
Housing Material %	90.0
Diffuser Material	PMMA
Diffuser Material%	100.0
Material 2%	10.0

INSTALLATION AND CONNECTION	
Areas of use	Bedroom, Cottage, Hotel, Residence
Mounting	Recessed, Wall
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS	
CE mark	Yes