



PRODUCT DATA SHEET


Giulio recessed wall flexible hose copper/antique brass

Art.no: 11840-13



Lighting Solutions

55mm

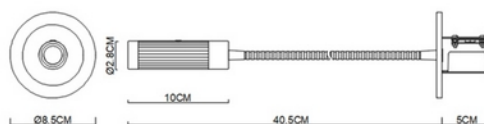

Giulio recessed wall flexible hose copper/antique brass



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
CRI / Ra ($\geq$)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)

**PRODUCT DATA SHEET**

Giulio recessed wall flexible hose copper/antique brass

Art.no: 11840-13

*Lighting Solutions*

PHOTOMETRIC DATA	
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
MacAdam (SDCM)	3
Forward Voltage LED (max tp=25) (V)	3.0
Driftspenning LED (min tp=65) (V)	2.5

DRIVER	
Manufacturer (driver)	Self
Protection Class (driver)	2
Standby power Psb (W) <	0.187
Flicker metric (Pst LM) <	0.029
Stroboscopic effect metric (SVM) <	0.002
Max Output Voltage (V)	6
Dimming (driver)	None
IP (driver)	IP20
Expected Lifetime (driver) (h)	30000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	null - 700
Current setting (driver)	None
CC (forward voltage driver) (V)	2.0 - 4.2
Output Current Tolerance (%)	11.5
Leakage current (mA)	0.3
Inrush current time (µs)	35.0
Inrush current I _{max} (A)	18.0

DIMENSIONS	
Length (product) (mm)	400.0
Width (product) (mm)	85.0
Height (product) (mm)	28.0
Weight (product) (kg)	0.4

MATERIALS AND SURFACES	
Color	Copper/Brass

**PRODUCT DATA SHEET**

Giulio recessed wall flexible hose copper/antique brass

Art.no: 11840-13

*Lighting Solutions***INSTALLATION AND CONNECTION**

Areas of use	Cottage, Hotel, Residence
Mounting	Recessed, Wall
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS

Energy Class EPREL	G
CE mark	Yes
Energy Efficiency Class	A