


**PRODUCT DATA SHEET**

Alhena 1500lm 830/840/857 Switch 110° 15W IP65 WH  
Art.no: 2117-110-3



*Lighting Solutions*

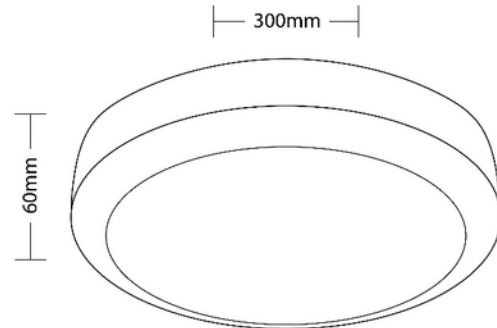

## Alhena 1500lm 830/840/857 Switch 110° 15W IP65 WH



Alhena is a surface mounted ceiling light IP65 waterproof structural design, It's an ideal replacement for wet locations and outdoor use. Switch option between 3000K(default), 4000K and 5700K. Quickconnect for easy installation.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP65
Outdoor	Yes
Operating temperature (°C)	-20 - 45

**PRODUCT DATA SHEET**

Alhena 1500lm 830/840/857 Switch 110° 15W IP65 WH

Art.no: 2117-110-3

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000/4000/5700
Color Code	830/840/857
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Opal
Lifetime (h)	L80B50: 50 000
MacAdam (SDCM)	3
Manufacturer (light source)	Everlight
Forward Voltage LED (max tp=25) (V)	42.0
Driftspenning LED (min tp=65) (V)	25.0

DRIVER	
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0
Max load pr circuit - B10	83
Max load pr circuit - B16	133
Max load pr circuit - C10	83
Max load pr circuit - C16	133
Inrush current time ( $\mu$ s)	20.0
Inrush current I <sub>max</sub> (A)	25.6

DIMENSIONS	
Width (product) (mm)	300.0
Height (product) (mm)	60.0

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Cottage, Generally, Hotel, Office, Residence
Mounting	Surface, Ceiling
Connection (system)	QuickConnect



**PRODUCT DATA SHEET**

Alhena 1500lm 830/840/857 Switch 110° 15W IP65 WH

Art.no: 2117-110-3



*Lighting Solutions*

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A

**LIGHT DISTRIBUTION**

