
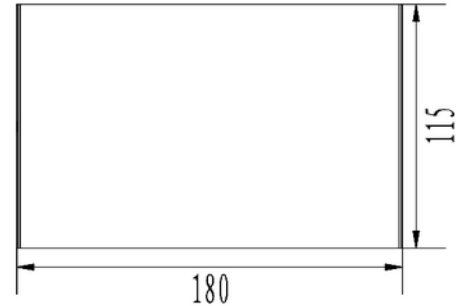


**PRODUCT DATA SHEET**

Matar 500lm 830 0-100° 2x6W Quickconnect Dark Grey

Art.no: 2470-90-7

*Lighting Solutions*

Matar 500lm 830 0-100° 2x6W Quickconnect Dark Grey



Matar has a unique feature where you separately may adjust the up and downward beam angle. This will allow the planner to fix the perfect beam angle for a diversity of applications. A timeless and slim design makes Matar the perfect choice for a glare free facade light, suitable both for home or decorative commercial use. Integrated slides allow for adjusting the two beam angles from 0°- 90°. Body in cast aluminium, with clear diffusers, and color in Dark Grey.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP54
Outdoor	Yes
Operating temperature (°C)	-20 - 50

**PRODUCT DATA SHEET**

Matar 500lm 830 0-100° 2x6W Quickconnect Dark Grey

Art.no: 2470-90-7

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	35
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Forward Voltage LED (max tp=25) (V)	24.0
Driftspenning LED (min tp=65) (V)	18.0

DRIVER	
Protection Class (driver)	2
CC (driver) [mA]	500 - null
CC (forward voltage driver) (V)	24.0 - null
Output Current Tolerance (%)	5.0
Current Ripple (%)	50.0
Max load pr circuit - B10	17
Max load pr circuit - B16	26
Max load pr circuit - C10	29
Max load pr circuit - C16	47
Leakage current (mA)	0.5
Inrush current time (µs)	125.0
Inrush current I _{max} (A)	15.0

DIMENSIONS	
Length (product) (mm)	180.0
Width (product) (mm)	42.0
Height (product) (mm)	115.0
Weight (product) (kg)	0.86

MATERIALS AND SURFACES	
Color	Dark Grey
RAL Code	RAL7024



PRODUCT DATA SHEET

Matar 500lm 830 0-100° 2x6W Quickconnect Dark Grey

Art.no: 2470-90-7



Lighting Solutions

INSTALLATION AND CONNECTION	
Areas of use	Cottage, Facade, Outdoor, Residence
Mounting	Surface, Wall
Connection (system)	QuickConnect

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A

LIGHT DISTRIBUTION

