


**PRODUCT DATA SHEET**

Tony Pendant G2 927 9,3W Ø:60x250mm 3m BK/GD Phasecut  
Art.no: P-2-0001-2



*Lighting Solutions*

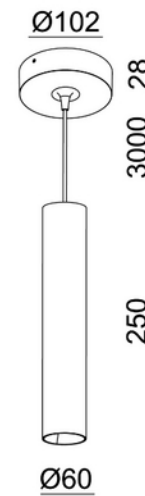

## Tony Pendant G2 927 9,3W Ø:60x250mm 3m BK/GD Phasecut



The Tony pendant looks great by itself, and even more impressive when there are many of them installed together. With its minimalistic shape the Tony Pendant gives a unique and exciting impression. The pendant is available in black with a golden inner ring. The Tony pendant comes in one size, with a three meter cable.

| ELECTRICAL DATA           |           |
|---------------------------|-----------|
| Protection Class (system) | 1         |
| Dimming (system)          | Phase-Cut |
| Voltage (system) [V]      | 230V 50Hz |

| TECHNICAL DATA |      |
|----------------|------|
| IP (system)    | IP20 |
| Outdoor        | No   |

**PRODUCT DATA SHEET**

Tony Pendant G2 927 9,3W Ø:60x250mm 3m BK/GD Phasecut  
Art.no: P-2-0001-2



*Lighting Solutions*

| PHOTOMETRIC DATA            |                 |
|-----------------------------|-----------------|
| Efficacy (system) (lm/W)    | 90              |
| CRI / Ra (>=)               | 90              |
| CCT (Color Temperature) (K) | 2700            |
| Color Code                  | 927             |
| Lightsource Type            | LED (built in)  |
| Lens (Diffuser)             | Clear           |
| Lifetime (h)                | L80B10: 100 000 |

| DRIVER                                 |               |
|--|---------------|
| Manufacturer (driver)                  | AcTEC         |
| Protection Class (driver)              | 2             |
| Max Output Voltage (V)                 | 26            |
| Dimming (driver)                       | Phase-Cut     |
| Dimming Minimum Level (%)              | 1.0           |
| Dimming Phasecut Type                  | Trailing edge |
| IP (driver)                            | IP20          |
| Expected Lifetime (driver) (h)         | 50000         |
| Constant current or voltage (CC or CV) | CC            |
| CC (driver) [mA]                       | 500 - null    |
| Current setting (driver)               | None          |
| CC (forward voltage driver) (V)        | 10.0 - 20.0   |
| Output Current Tolerance (%)           | 5.0           |
| Current Ripple (%)                     | 10.0          |
| Max load pr circuit - B10              | 125           |
| Max load pr circuit - B16              | 200           |
| Max load pr circuit - C10              | 125           |
| Max load pr circuit - C16              | 200           |
| Inrush current time (µs)               | 100.0         |
| Inrush current I <sub>max</sub> (A)    | 5.0           |

| DIMENSIONS            |       |
|-----------------------|-------|
| Width (product) (mm)  | 60.0  |
| Height (product) (mm) | 250.0 |
| Weight (product) (kg) | 0.85  |

**PRODUCT DATA SHEET**

Tony Pendant G2 927 9,3W Ø:60x250mm 3m BK/GD Phasecut  
Art.no: P-2-0001-2



*Lighting Solutions*

| MATERIALS AND SURFACES |       |
|------------------------|-------|
| Color                  | Black |

| INSTALLATION AND CONNECTION |                           |
|-----------------------------|---------------------------|
| Areas of use                | Cottage, Hotel, Residence |
| Mounting                    | Ceiling, Pendant          |
| Connection (system)         | Cable 3m                  |

| ENERGY AND CERTIFICATIONS |         |
|---------------------------|---------|
| CE mark                   | Yes     |
| Energy Efficiency Class   | A++ - A |

**LIGHT DISTRIBUTION**