
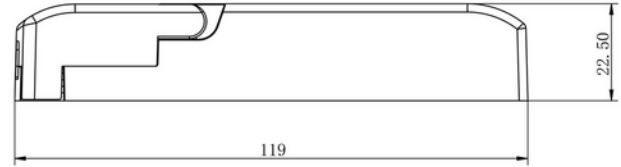


**PRODUCT DATA SHEET**

Driver DALI 350mA max 20W 20-60V 18i5 DALI/EPN0034

Art.no: 0300-29

*Lighting Solutions*

Driver DALI 350mA max 20W 20-60V 18i5 DALI/EPN0034



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-20 - 50
Connection 1	18i5 DALI male
Connection 2	EPN0034 female

DRIVER	
Manufacturer (driver)	AcTEC

**PRODUCT DATA SHEET**

Driver DALI 350mA max 20W 20-60V 18i5 DALI/EPN0034

Art.no: 0300-29

*Lighting Solutions*

DRIVER	
Protection Class (driver)	2
Standby power P_{sb} (W) <	0.5
Flicker metric (Pst LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Max Output Voltage (V)	75
Dimming (driver)	DALI2
Dimming Minimum Level (%)	1.0
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	260 - 700
CC (forward voltage driver) (V)	20.0 - 36.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	20.0
Max load pr circuit - B10	46
Max load pr circuit - B16	74
Max load pr circuit - C10	62
Max load pr circuit - C16	100
Max load pr circuit - C20	125
Leakage current (mA)	0.7
Inrush current time (μ s)	100.0
Inrush current I_{max} (A)	15.0

ENERGY AND CERTIFICATIONS	
CE mark	Yes