
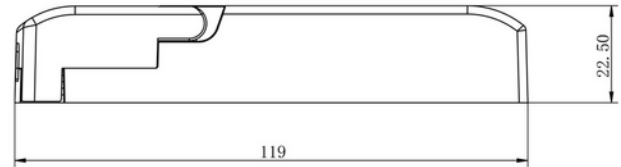


**PRODUKTDATABLAD**

Driver DALI 350mA max 20W 20-60V 18i5 DALI/EPN0034

Art.no: 0300-29

*Lighting Solutions*

Driver DALI 350mA max 20W 20-60V 18i5 DALI/EPN0034



| ELEKTRISKE DATA | |
|------------------------|-----------|
| Beskyttelsesklasse | 2 |
| Dimmefunksjon (system) | DALI2 |
| Spenning (V) | 230V 50Hz |

| TEKNISK DATA | |
|-----------------------|----------------|
| IP (system) | IP20 |
| Utendørs | No |
| Driftstemperatur (°C) | -20 - 50 |
| Tilkobling Kabel 1 | 18i5 DALI hann |
| Tilkobling Kabel 2 | EPN0034 hunn |

| DRIVER / BALLAST | |
|--------------------|-------|
| Produsent (driver) | AcTEC |

**PRODUKTDATABLAD**

Driver DALI 350mA max 20W 20-60V 18i5 DALI/EPN0034

Art.no: 0300-29

*Lighting Solutions*

| DRIVER / BALLAST | |
|--|----------------------|
| Produsentens driverbeskrivelse | IE-25D |
| Effekt (driver) (W) | 25 |
| Beskyttelsesklasse (driver) | 2 |
| Standbyeffekt Psb (W) < | 0.5 |
| Flimmerindikator (Pst LM) < | 1.0 |
| Stroboskopeffektindikator (SVM) < | 0.4 |
| Maks utgangsspenning (V) | 75 |
| Dimmefunksjon (driver) | DALI2 |
| Minimum dimmenivå (%) | 1.0 |
| Type Dimming | Amplitude Modulation |
| IP-klasse (driver) | IP20 |
| Forventet levetid (driver) (t) | 50000 |
| Konstant strøm eller spenning (CC eller CV) | CC |
| Konstant strøm (CC driver) (mA) | 260 - 700 |
| Konstant strøm (CC driftspenning driver) (V) | 20.0 - 36.0 |
| Utgangsstrøm toleranse (%) | 5.0 |
| Strømkrusning (%) | 20.0 |
| Maks belastning per kurs - B10 | 46 |
| Maks belastning per kurs - B16 | 74 |
| Maks belastning per kurs - C10 | 62 |
| Maks belastning per kurs - C16 | 100 |
| Maks belastning per kurs - C20 | 125 |
| Lekkasjestrøm (mA) | 0.7 |
| Startstrøm tid (μ s) | 100.0 |
| Startstrøm I _{max} (A) | 15.0 |

| ENERGI OG GODKJENNING | |
|-----------------------|-----|
| CE-merke | Yes |