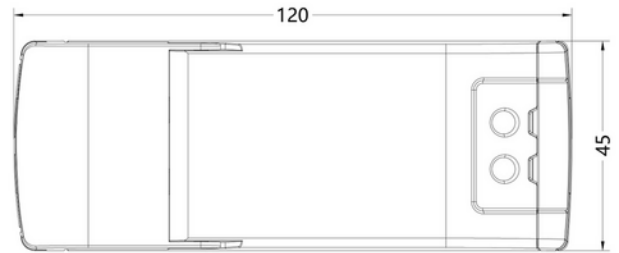


**PRODUCT DATA SHEET**

Driver 450mA cc 18W 20-40V Phasecut AcTec 18i3 Male/EPN0034

Art.no: D45018NTF

*Lighting Solutions*

Driver 450mA cc 18W 20-40V Phasecut AcTec 18i3 Male/EPN0034



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Connection 1	18i3 male
Connection 2	EPN0034 female

**PRODUCT DATA SHEET**

Driver 450mA cc 18W 20-40V Phasecut AcTec 18i3 Male/EPN0034

Art.no: D45018NTF

*Lighting Solutions*

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Flicker metric (Pst LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Dimming (driver)	Phase-Cut
Dimming Minimum Level (%)	1.0
Dimming Phasecut Type	Leading / Trailing edge
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	450 - null
CC (forward voltage driver) (V)	20.0 - 40.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	20.0
Max load pr circuit - B10	35
Max load pr circuit - B16	56
Max load pr circuit - C10	74
Max load pr circuit - C16	118
Max load pr circuit - C20	148
Leakage current (mA)	0.7
Inrush current time (μ s)	300.0
Inrush current I _{max} (A)	5.0

MATERIALS AND SURFACES	
Color	White

ENERGY AND CERTIFICATIONS	
CE mark	Yes