





PRODUCT DATA SHEET

Driver 350mA (180-500mA) cc 12W DALI2 AcTec SM-plug 18i5DALI

Art.no: IE12D-04



Lighting Solutions

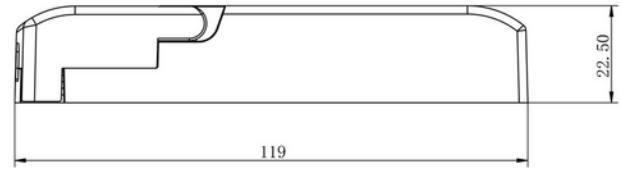

Driver 350mA (180-500mA) cc 12W DALI2 AcTec SM-plug 18i5DALI



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Connection 1	18i5 DALI male
Connection 2	SM Connector

**PRODUCT DATA SHEET**

Driver 350mA (180-500mA) cc 12W DALI2 AcTec SM-plug 18i5DALI

Art.no: IE12D-04

*Lighting Solutions*

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Standby power Psb (W) <	0.5
Flicker metric (Pst LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Max Output Voltage (V)	70
Dimming (driver)	DALI2
Dimming Minimum Level (%)	1.0
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	180 - 500
CC (forward voltage driver) (V)	12.0 - 34.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	40.0
Max load pr circuit - B10	46
Max load pr circuit - B16	74
Max load pr circuit - C10	93
Max load pr circuit - C16	149
Max load pr circuit - C20	186
Leakage current (mA)	0.7
Inrush current time (μ s)	100.0
Inrush current I _{max} (A)	15.0

DIMENSIONS	
Length (product) (mm)	114.0
Width (product) (mm)	24.0
Height (product) (mm)	54.0
Weight (product) (kg)	0.11

ENERGY AND CERTIFICATIONS	
CE mark	Yes