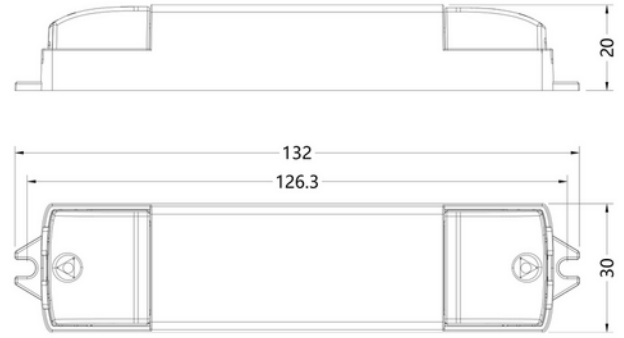


**PRODUCT DATA SHEET**

Driver 150mA (150-700mA) cc 12W DALI2 AcTec SM-plug 18i5

Art.no: LIM-12D

*Lighting Solutions*

Driver 150mA (150-700mA) cc 12W DALI2 AcTec SM-plug 18i5



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Connection 1	18i5 male
Connection 2	SM Connector

**PRODUCT DATA SHEET**

Driver 150mA (150-700mA) cc 12W DALI2 AcTec SM-plug 18i5

Art.no: LIM-12D

*Lighting Solutions*

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Standby power Psb (W) <	0.5
Flicker metric (Pst LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Dimming (driver)	DALI2
Dimming Minimum Level (%)	1.0
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	150 - 700
CC (forward voltage driver) (V)	2.0 - 42.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	20.0
Max load pr circuit - B10	70
Max load pr circuit - B16	112
Max load pr circuit - C10	125
Max load pr circuit - C16	200
Max load pr circuit - C20	250
Leakage current (mA)	0.7
Inrush current time (μ s)	100.0
Inrush current I _{max} (A)	10.0

MATERIALS AND SURFACES	
Color	White

ENERGY AND CERTIFICATIONS	
CE mark	Yes