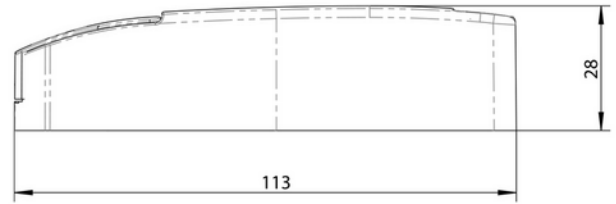


**PRODUCT DATA SHEET**

Driver 350mA cc (2-58V) 20W IP20 w/3m cable Euro-plug WH

Art.no: Q4-350mA-20W-01

*Lighting Solutions*

Driver 350mA cc (2-58V) 20W IP20 w/3m cable Euro-plug WH



"Universal" 350mA constant current driver with forward voltage 2-58V. 3m cable on primary side. Works well with Aludra (1-5 pcs) and Capella (1-17 pcs). No dimming.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-20 - 50
Connection 1	3m Cable w/ Euro-plug
Connection 2	Terminal

**PRODUCT DATA SHEET**

Driver 350mA cc (2-58V) 20W IP20 w/3m cable Euro-plug WH
Art.no: Q4-350mA-20W-01



Lighting Solutions

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Flicker metric (Pst LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Max Output Voltage (V)	60
Dimming (driver)	None
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
Current setting (driver)	None
CC (forward voltage driver) (V)	2.0 - 58.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	40.0
Max load pr circuit - B10	71
Max load pr circuit - B16	18
Max load pr circuit - C10	24
Max load pr circuit - C16	39
Max load pr circuit - C20	49
Leakage current (mA)	0.7
Inrush current time (μ s)	300.0
Inrush current I _{max} (A)	15.0

DIMENSIONS	
Length (product) (mm)	113.0
Width (product) (mm)	28.0
Height (product) (mm)	44.0
Weight (product) (kg)	0.15

ENERGY AND CERTIFICATIONS	
CE mark	Yes