






**PRODUCT DATA SHEET**

Driver 24V cv 100W IP20 w/3m cable Euro-plug WH 184x61x32mm

Art.no: Q8H-24V-100W-01



*Lighting Solutions*

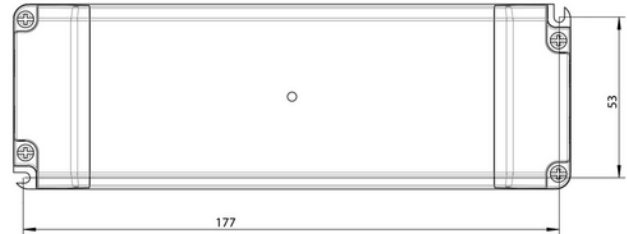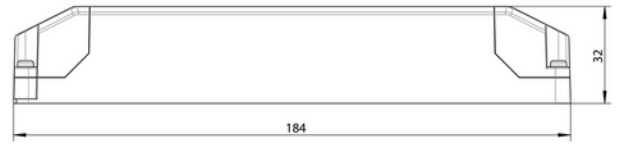

## Driver 24V cv 100W IP20 w/3m cable Euro-plug WH 184x61x32mm



24V constant voltage LED driver with 3m mains cable included (EURO-plug).

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-20 - 50
Connection 1	3m Cable w/ Euro-plug

**PRODUCT DATA SHEET**

Driver 24V cv 100W IP20 w/3m cable Euro-plug WH 184x61x32mm

Art.no: Q8H-24V-100W-01

*Lighting Solutions*

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Flicker metric (Pst LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Dimming (driver)	None
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CV
CV (driver) [V]	24
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0
Max load pr circuit - B10	3
Max load pr circuit - B16	5
Max load pr circuit - C10	7
Max load pr circuit - C16	11
Max load pr circuit - C20	14
Leakage current (mA)	0.7
Inrush current time ( $\mu$ s)	300.0
Inrush current I <sub>max</sub> (A)	50.0

DIMENSIONS	
Length (product) (mm)	184.0
Width (product) (mm)	61.0
Height (product) (mm)	32.0
Weight (product) (kg)	0.3

ENERGY AND CERTIFICATIONS	
CE mark	Yes