



FURNITURE LIGHTING

MAGNETIC TRACK LIGHT ORBIT SERIES



LIGHT UP ANY SPACE AND CORNER AS YOU LIKE
MAKE LIGHTING BY FREELY PUT

Orbit Series - Spot Mercury



■ Model number: TL2010	LED Color	Finish
Magnet fixing and conducting	3000K	- Black
Wireless and detachable design	4000K	- White
Nonpolarity anti inversion design	5000K	- Silver

■ CV 12-24V DC Input Character	Ra >90 >80 Color Rendition Index (CRI) Character
1W Power (Watts)	60lm /W Luminous Efcacy Character
20300143 OPTIC Beaming Angle	





Orbit Series - Spot Mars



■ Model number: TL2020	LED Color	Finish
Magnet fixing and conducting	3000K	- Black
Wireless and detachable design	4000K	- White
Nonpolarity anti inversion design	5000K	- Silver

■ CV 12-24V DC	Input Character	Ra >90/ >80	Color Rendition Index (CRI) Character
2W	Power (Watts)	60lm /W	Luminous Efcacy Character
20°/30°/40° OPTIC	Beaming Angle		




Orbit Series - Spot Mars-Zoom



■ Model number: TL2070	LED Color	Finish
	Magnet fixing and conducting	
	Wireless and detachable design	
	Nonpolarity anti inversion design	
	3000K	- Black
	4000K	- White
	5000K	- Silver

CV 12-24V DC	Input Character"	Ra >90/ >80	Color Rendition Index (CRI) Character
3W	Power (Watts)	60lm /W	Luminous Efcacy Character
18°-40° ZOOM	Beaming Angle		

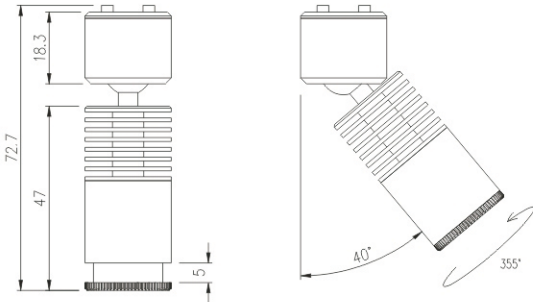



12




13

Orbit Series - Spot Venus



■ Model number: TL2030	LED Color	Finish
Magnet fixing and conducting	3000K	- Black
Wireless and detachable design	4000K	- White
Nonpolarity anti inversion design	5000K	- Silver

■ Cv 12-24V DC	Input Character	Ra >90/ >80	Color Rendition Index (CRI) Character
1W	Power (Watts)	60lm /W	Luminous Efcacy Character
20°/20140 OPTIC	Beaming Angle		

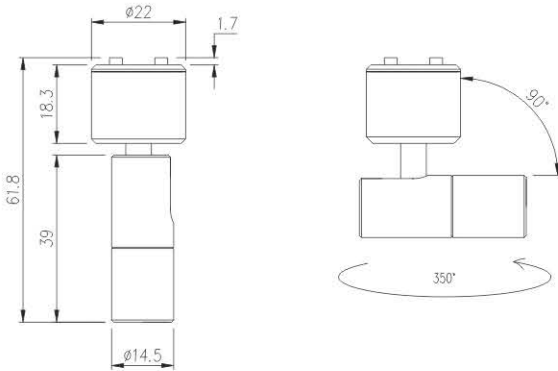


Orbit Series - Spot Earth



■ Model number: TL2040	LED Color	Finish
Magnet fixing and conducting	■ 3000K	■ - Black
Wireless and detachable design	■ 4000K	□ - White
Nonpolarity anti inversion design	□ 5000K	■ - Silver

■ CV 12-24V DC	Input Character	Ra >90 >80	Color Rendition Index (CRI) Character
2W	Power (Watts)	60lm /w	Luminous Efcacy Character
20°x30°x40° OPTIC	Beaming Angle		

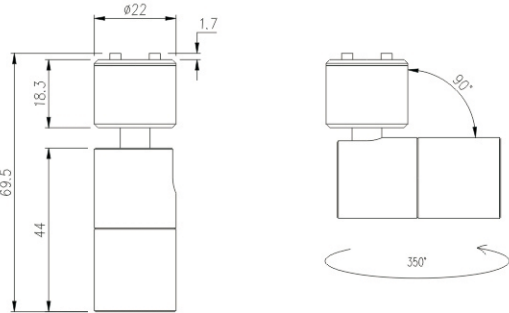


Orbit Series - Spot Uranus



■ Model number: TL2050	LED Color	Finish
Magnet fixing and conducting	3000K	- Black
Wireless and detachable design	4000K	- White
Nonpolarity anti inversion design	5000K	- Silver

■ CV 12-24V DC Input Character	Ra >90/ >80 Color Rendition Index (CRI) Character
3W Power (Watts)	60lm /W Luminous Efcacy Character
20°/30°/40° OPTIC Beaming Angle	

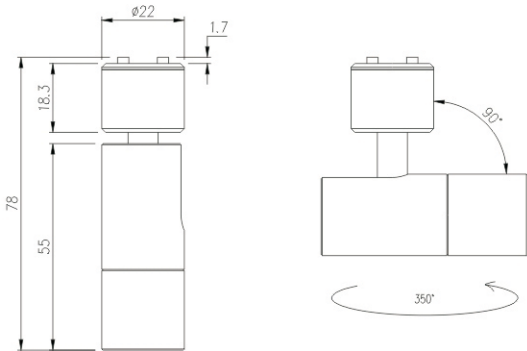


Orbit Series - Spot Uranus-Zoom



■ Model number: TL2080	LED Color	Finish
Magnet fixing and conducting	3000K	- Black
Wireless and detachable design	4000K	- White
Nonpolarity anti inversion design	5000K	- Silver

■ CV 12-24V DC	Input Character	Ra >90 / >80	Color Rendition Index (CRI) Character
3W	Power (Watts)	60lm /W	Luminous Efcacy Character
10°-40° ZOOM	Beaming Angle		

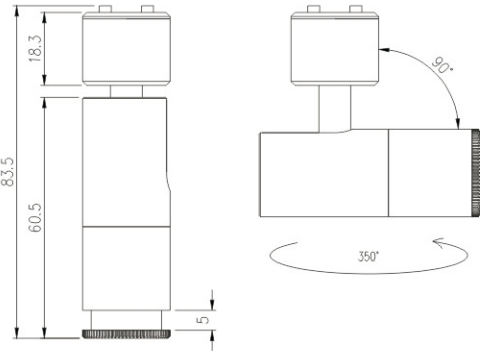





Orbit Series - Spot Neptune



■ Model number: TL2060	LED Color	Finish
Magnet fixing and conducting	3000K	- Black
Wireless and detachable design	4000K	- White
Nonpolarity anti inversion design	5000K	- Silver

■ CV 24V VDC Input Character	Ra >90/ >80 Color Rendition Index (CRI) Character
4W Power (Watts)	70lm /W Luminous Efcacy Character
40° OPTIC Beaming Angle	




Orbit Series - Spot Saturn



■ Model number: TL3010	LED Color	Finish
Magnet fixing and conducting	3000K	- Black
Wireless and detachable design	4000K	- White
Nonpolarity anti inversion design	5000K	- Silver

■ CV 24V VDC	Input Character	Ra >90/ >80	Color Rendition Index (CRI) Character
6W	Power (Watts)	80lm /W	Luminous Efcacy Character
20°-60° ZOOM	Beaming Angle		

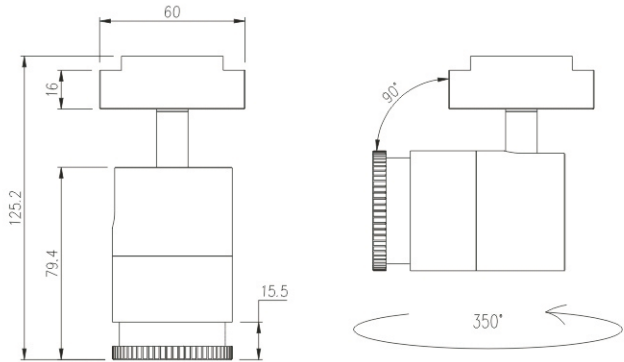


Orbit Series - Spot Jupiter



■ Model number: TL3020	LED Color	Finish
Magnet fixing and conducting	3000K	- Black
Wireless and detachable design	4000K	- White
Nonpolarity anti inversion design	5000K	- Silver

■ CV 24V VDC	Input Character	Ra >90/ >80	Color Rendition Index (CRI) Character
10W	Power (Watts)	80lm /W	Luminous Efcacy Character
20°-60° ZOOM	Beaming Angle		

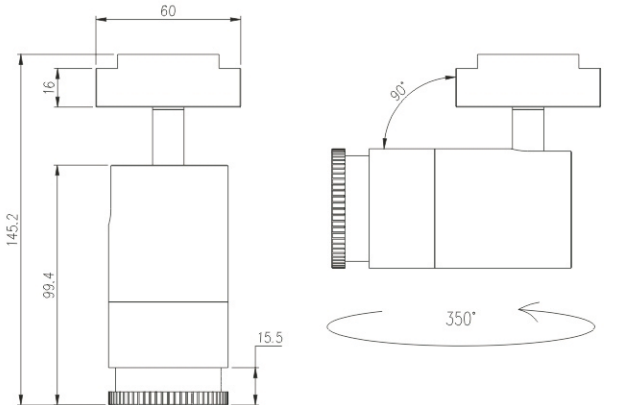



Orbit Series - Linear Halley Flat - Diffuser & Focus




Linear Halley Flat	LED Color	Finish
Magnet fixing and conducting Wireless and detachable design Nonpolarity anti inversion design	3000K	- Black
	4000K	- White
	5000K	- Silver

TL2090 (Diffuser)

CV 24V VDC	Input Character	Ra >90/ >80	Color Rendition Index (CRI) Character
3W	Power (Watts)	80lm /w	Luminous Efcacy Character
DIFF	Beaming Angle		

TL2100 (Focus)

CV 12-24V DC	Input Character	Ra >90/ >80	Color Rendition Index (CRI) Character
3W	Power (Watts)	80lm /w	Luminous Efcacy Character
20°/30°/40° OPTIC	Beaming Angle		

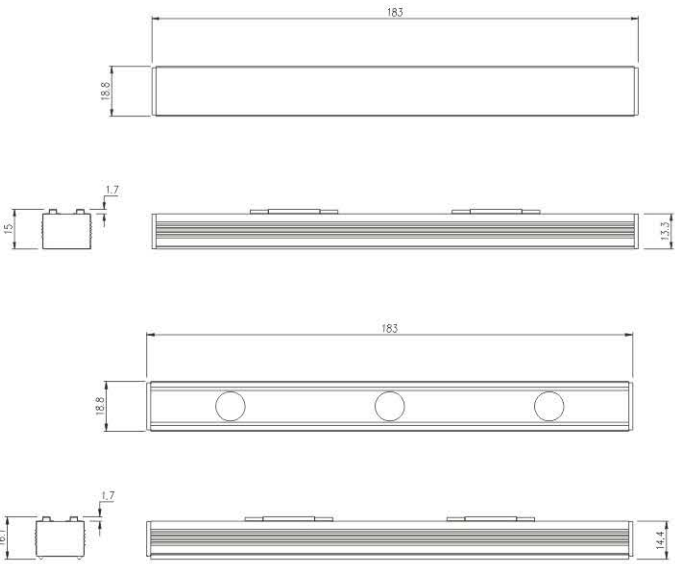

Orbit Series - Linear Halley 45° - Diffuser & Focus




Linear Halley 45°	LED Color	Finish
Magnet fixing and conducting Wireless and detachable design Nonpolarity anti inversion design	3000K	- Black
	4000K	- White
	5000K	- Silver

TL2110 (Diffuser)


CV 24V VDC	Input Character	Ra >90/ >80	Color Rendition Index (CRI) Character
3W	Power (Watts)	60lm /W	Luminous Efcacy Character
DIFF	Beaming Angle		

TL2120 (Focus)





CV 12-24V DC	Input Character	Ra >90/ >80	Color Rendition Index (CRI) Character
3W	Power (Watts)	80lm /W	Luminous Efcacy Character
20°/30°/40° OPTIC	Beaming Angle		

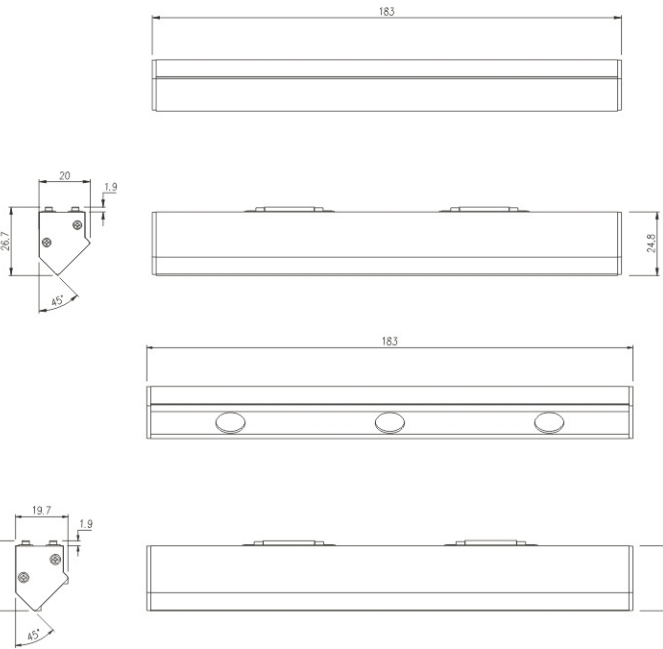

Orbit Series - Accessories

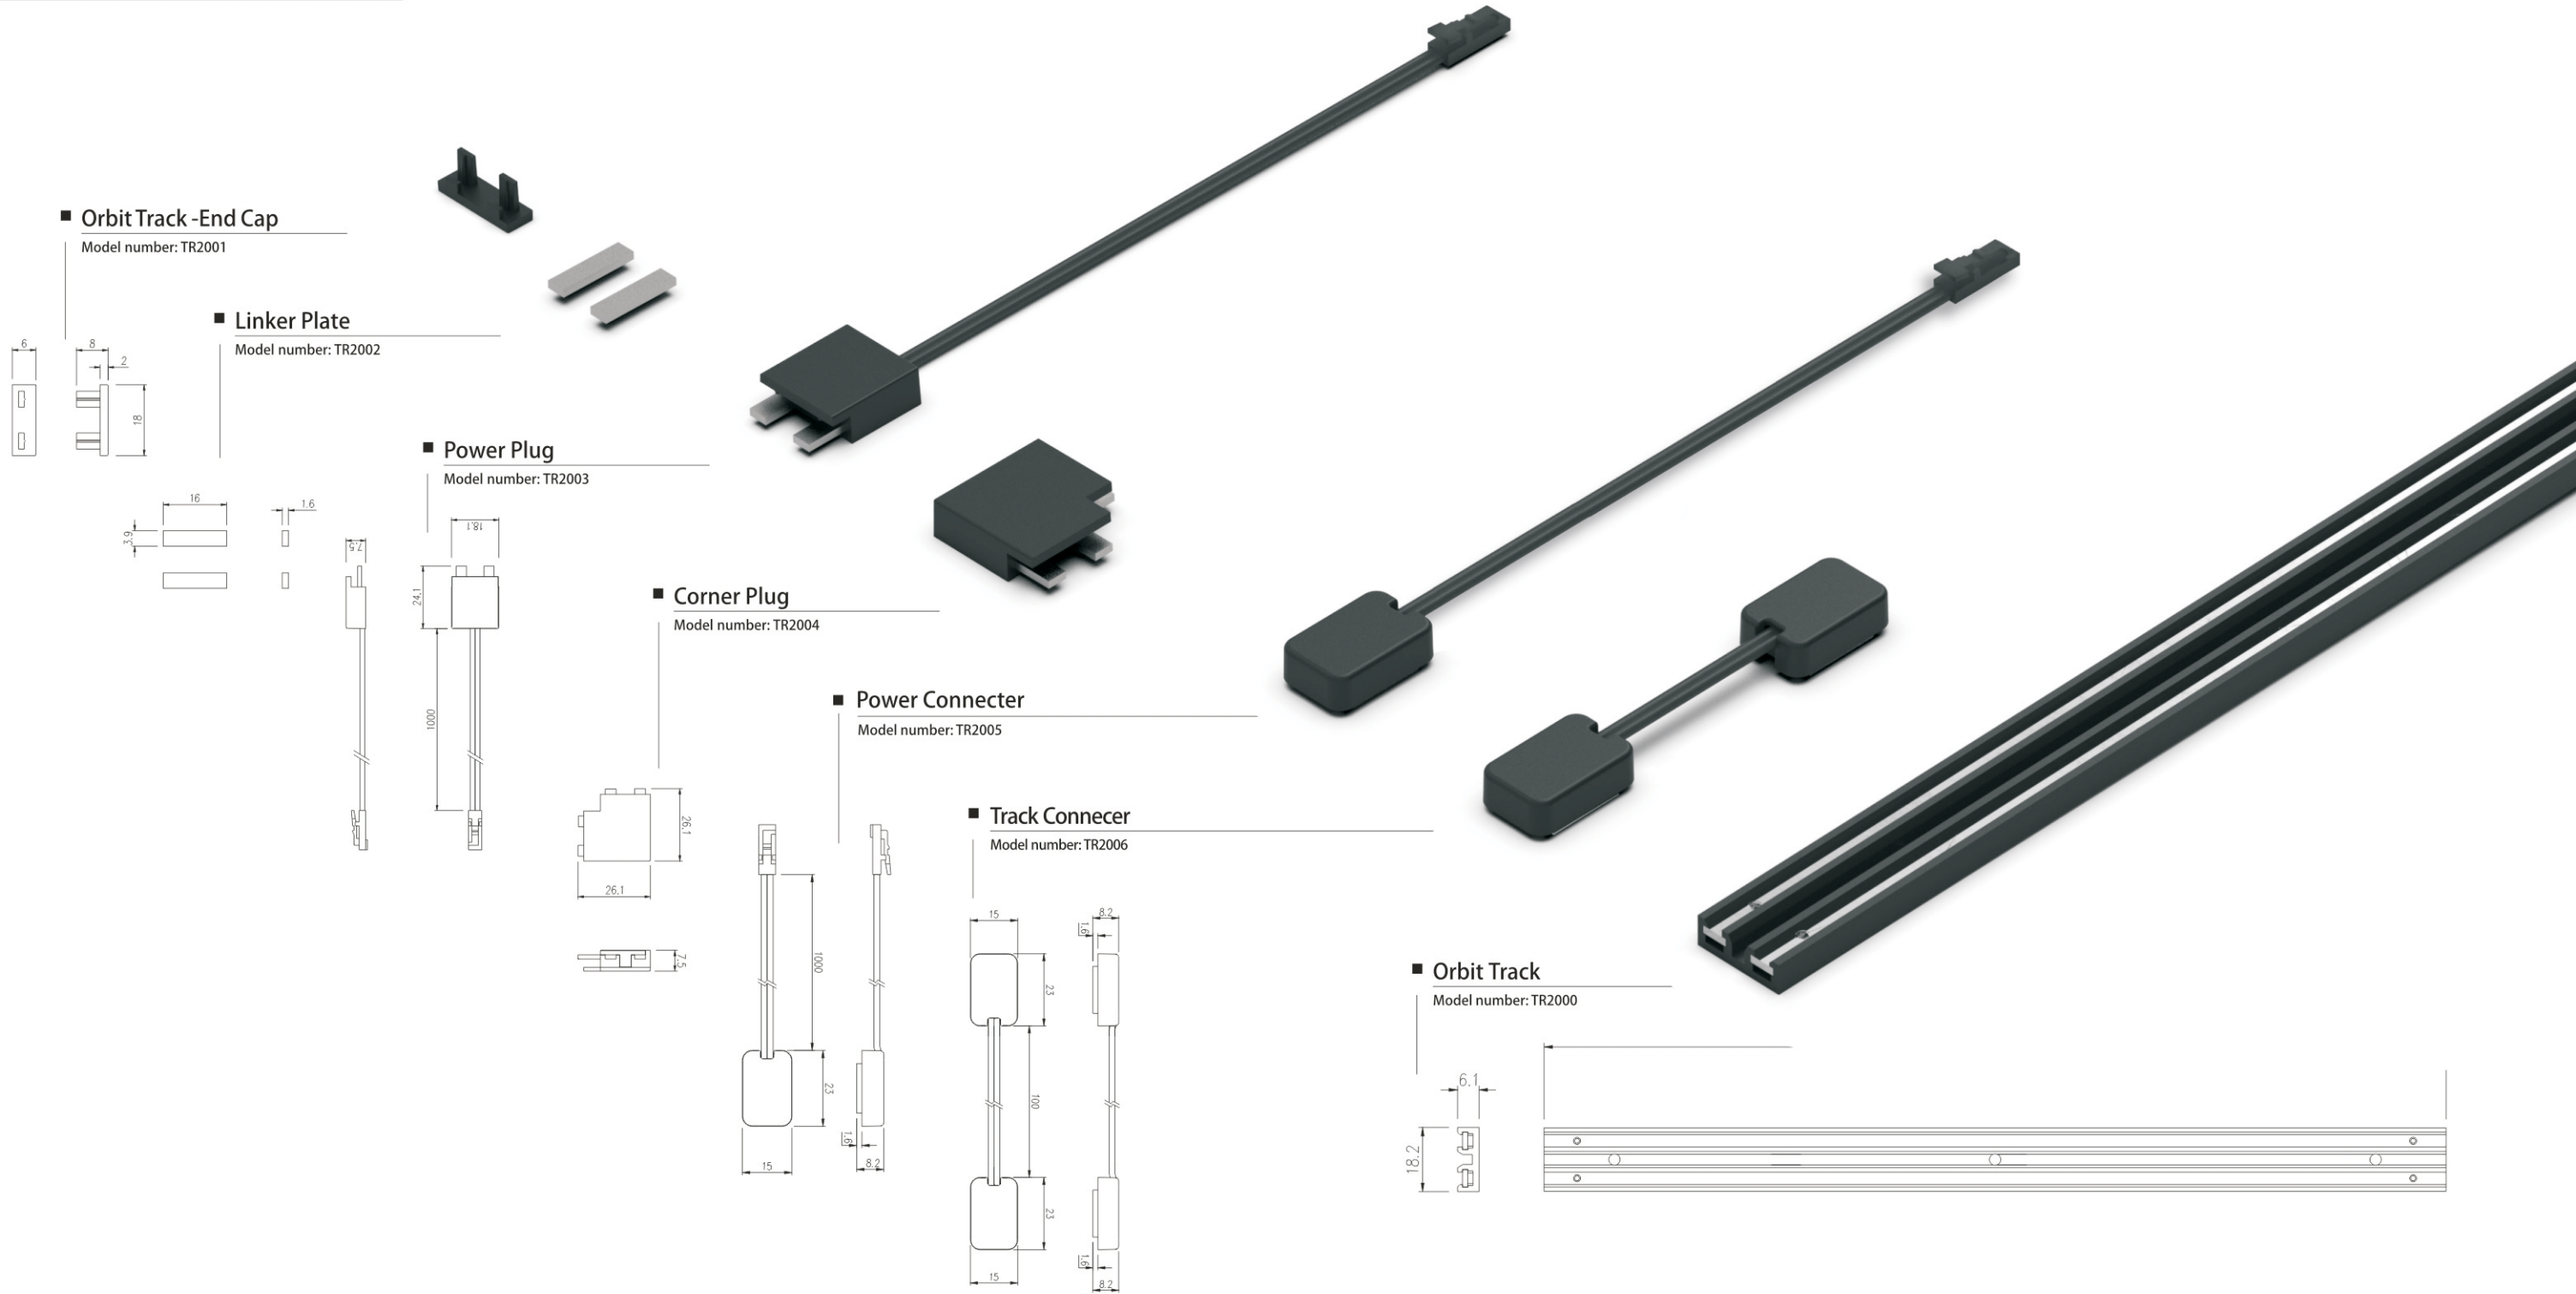


Orbit Series - Accessories

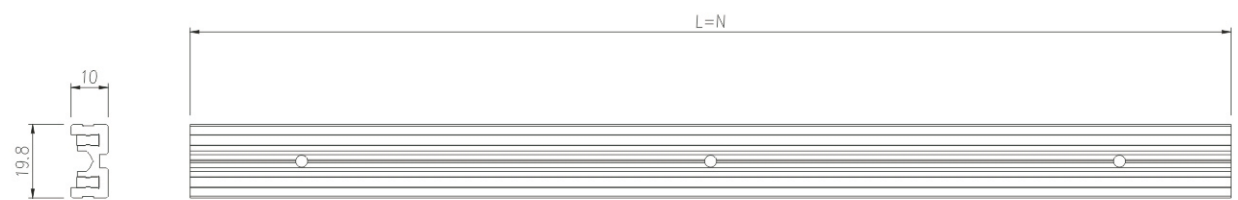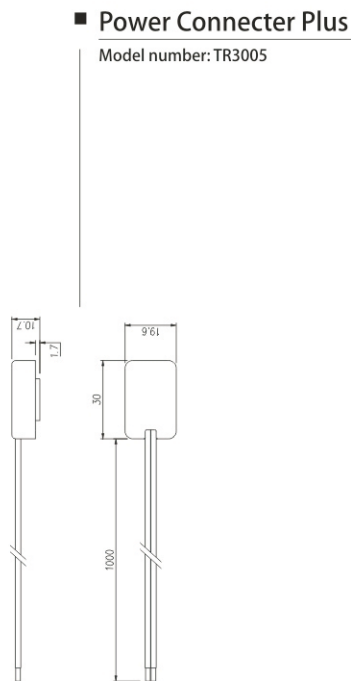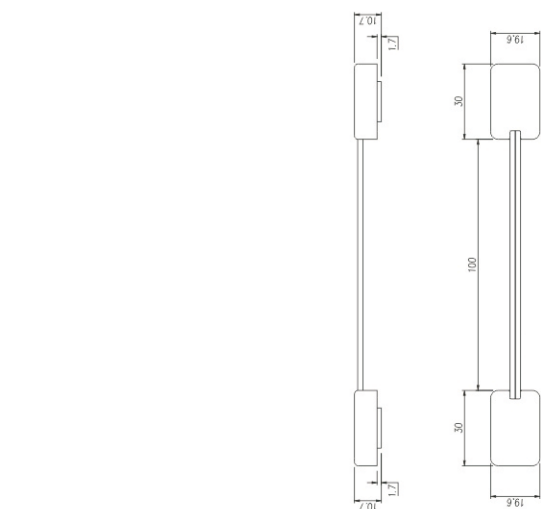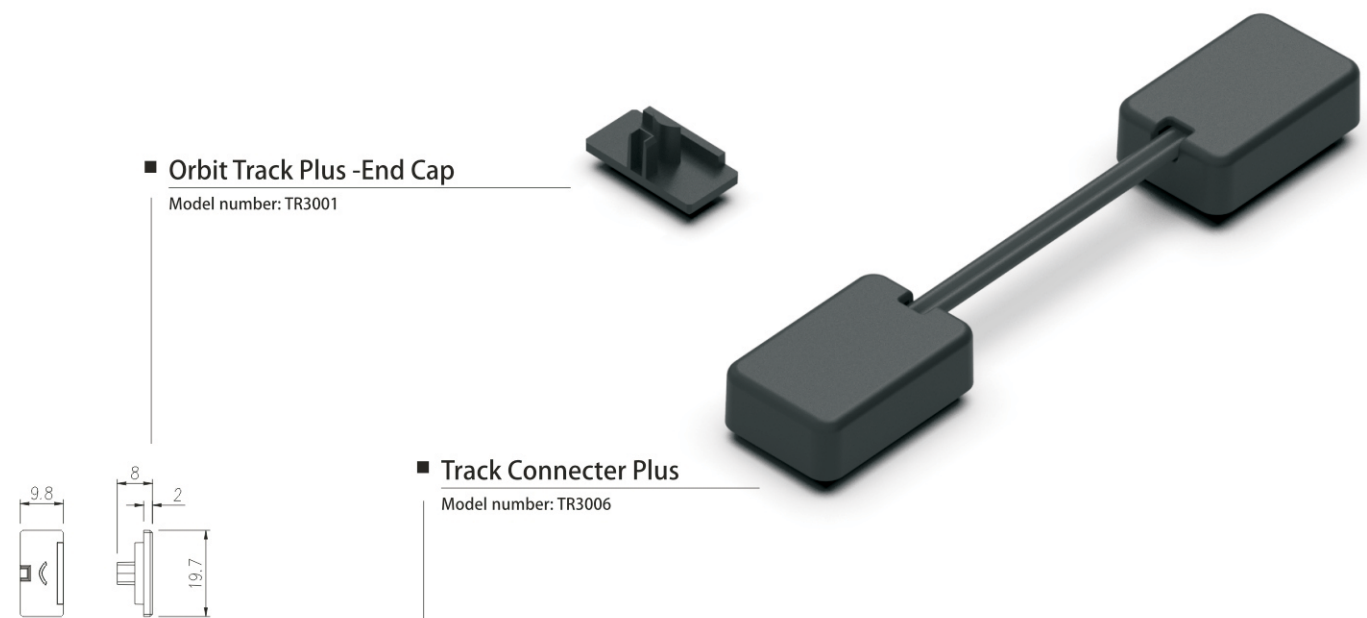

MAGNETIC TRACK LIGHT ORION SERIES

NEW EXTERIOR DESIGN CREATES A MINIMALIST DISPLAY ATMOSPHERE.
DIVERSE COLOR COMBINATIONS TO MEET DIFFERENT DISPLAY STYLES.
THREE LINES DESIGN MAKES DIMMING FUNCTION MORE STABLE.

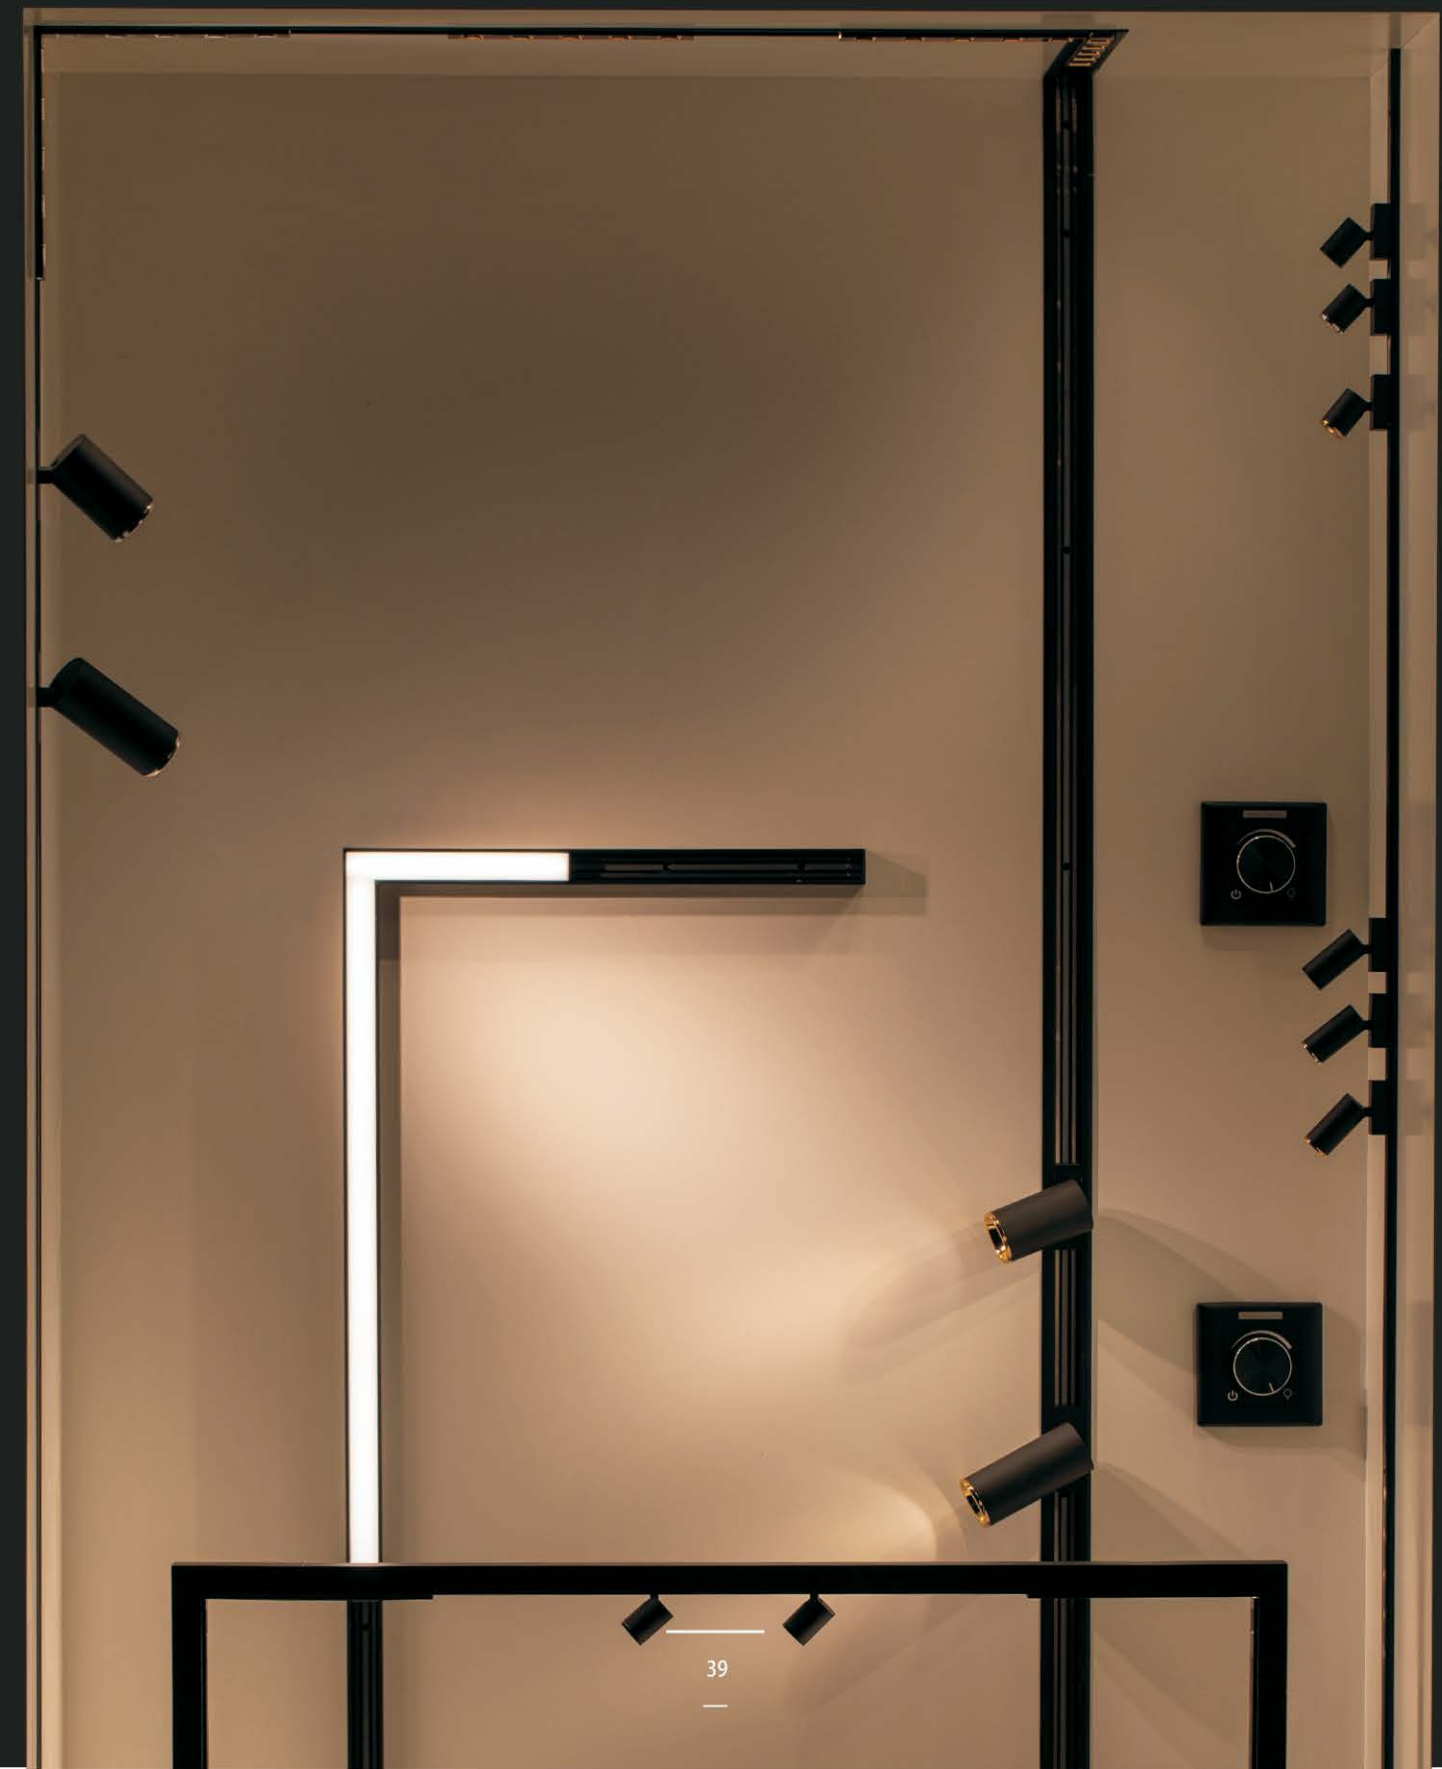


Orion Series- Spot Alnitak- 2W



■ Model number: TL4010	LED Color	Lens Cover Color
Tool free replacement modular lens Multiple color combinations to choose from 3 Lines design and support PWM dimming	3000K	- Black
	4000K	- Chrome
	5000K	- Gold

■  PWM Dimming	 Color Rendition Index (CRI) Character
 Power(Watts)@12~24V input	 Luminous Efcacy Character
 Beaming Angle	 Input Character

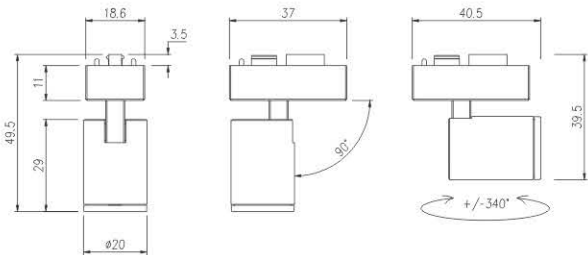

Orion Series- Spot Alnitak- 3W



- Model number: TL4020

Tool free replacement modular lens
Multiple color combinations to choose from
3 Lines design and support PWM dimming
- LED Color

3000K

4000K

5000K
- Lens Cover Color

- Black

- Chrome

- Gold

-  PWM Dimming

 3W

Power(Watts)@12~24V input

 Beam Angle

20°/26°/45° OPTIC

 $Ra >90 / >80$

Color Rendition Index (CRI) Character

 65lm /W

Luminous Efcacy Character

 CV 12-48V DC

Input Character
-
- 42
-
- 43

Orion Series- Spot Alnilam- 6W



- Model number: TL4030

Tool free replacement modular lens
Multiple color combinations to choose from
3 Lines design and support PWM dimming
- LED Color

3000K

4000K

5000K
- Lens Cover Color

- Black

- Chrome

- Gold

-  PWM Dimming

 1.6W /10cm

Power(Watts)@24V input

 20/30/40° OPTIC

Beaming Angle

 Ra >90 / >80

Color Rendition Index (CRI) Character

 100lm /W

Luminous Efcacy Character

 CV 24 - 48V DC



Input Character
-
- 44
-
- 45

Orion Series- Spot Alnilam- 9W




- **Model number: TL4040**
Tool free replacement modular lens
Multiple color combinations to choose from
3 Lines design and support PWM dimming
- | | |
|-----------|------------------|
| LED Color | Lens Cover Color |
| 3000K | - Black |
| 4000K | - Chrome |
| 5000K | - Gold |

- PWM Dimming
- 9W Power(Watts)@24V input
- 20°/30°/40° OPTIC Beaming Angle
- Ra >90 / >80 Color Rendition Index (CRI) Character
- 90lm /W Luminous Efcacy Character
- CV 24 - 48V DC Input Character

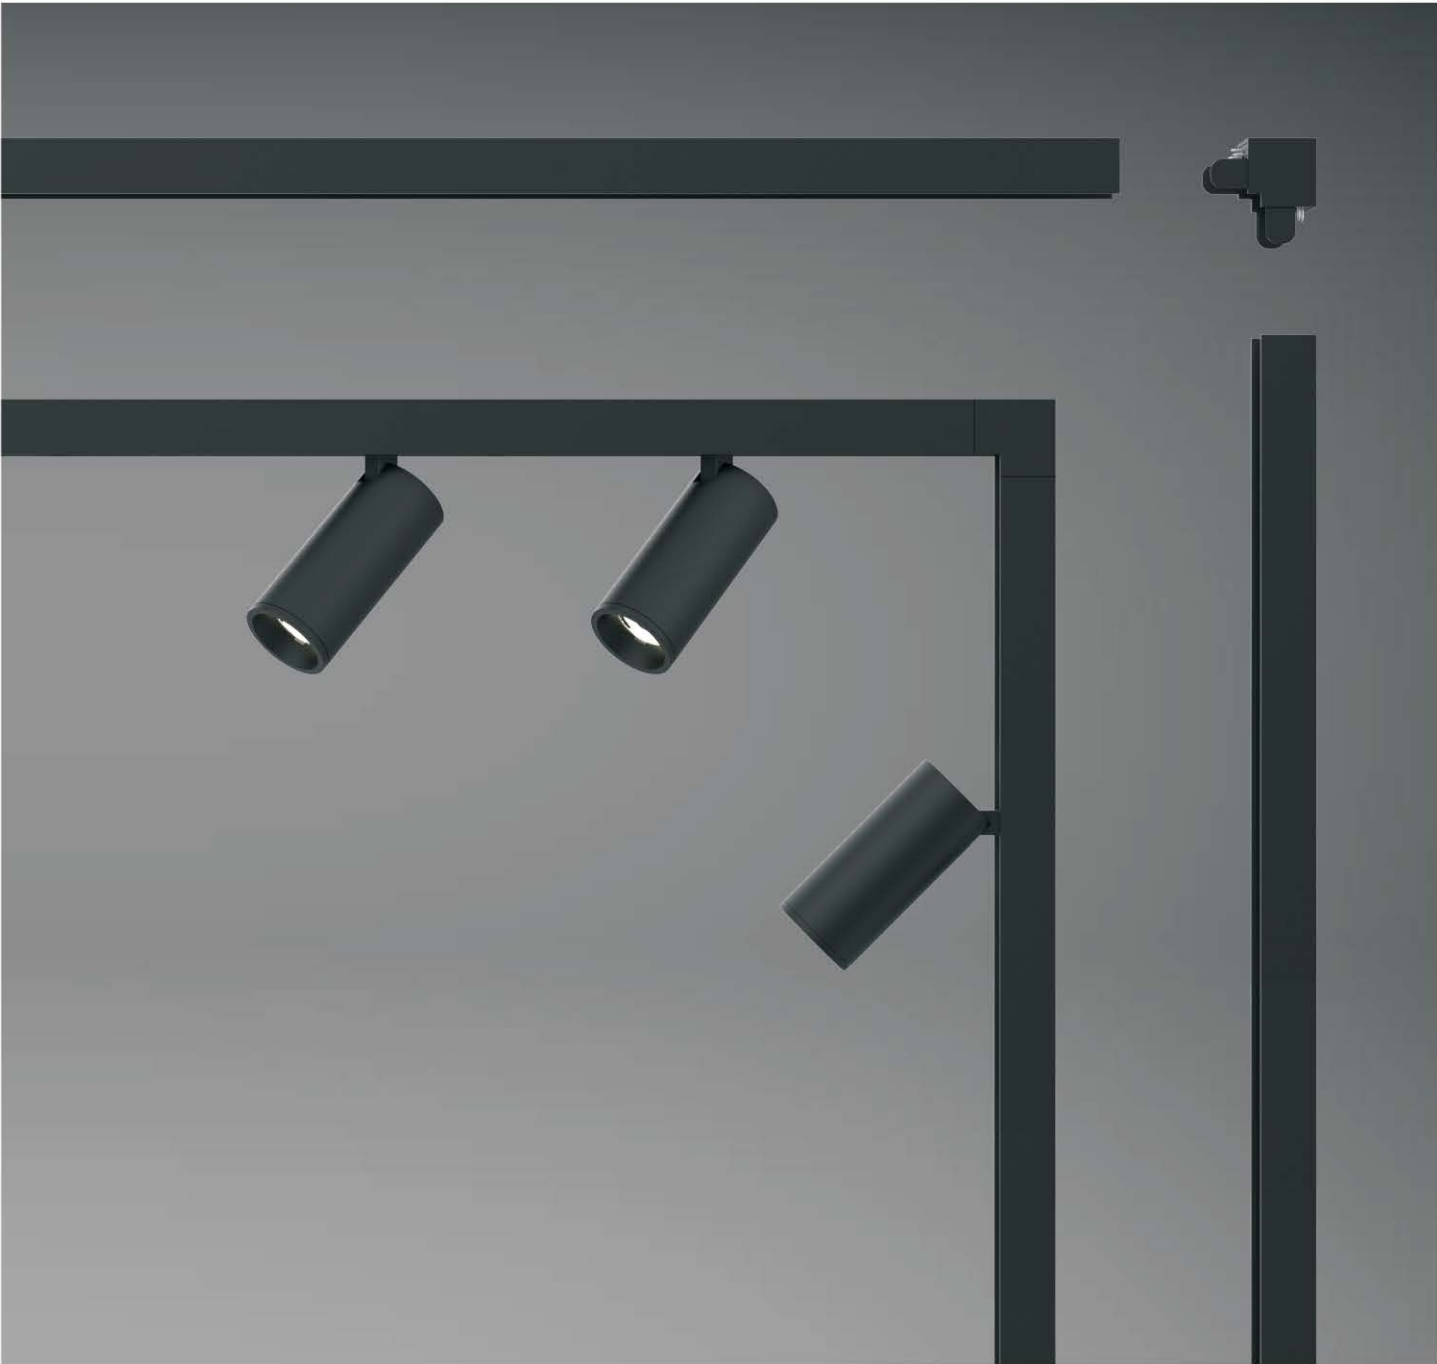
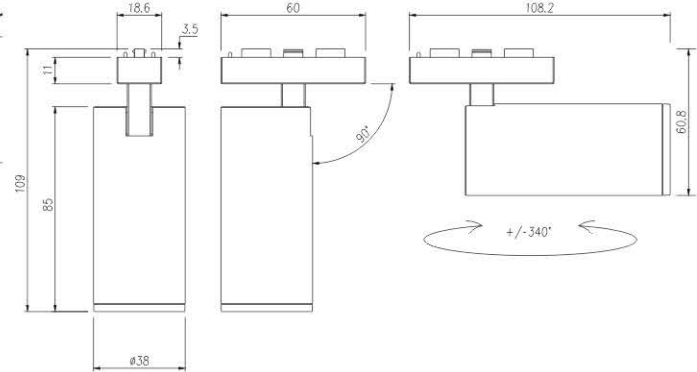


Orion Series- Linear Mintaka

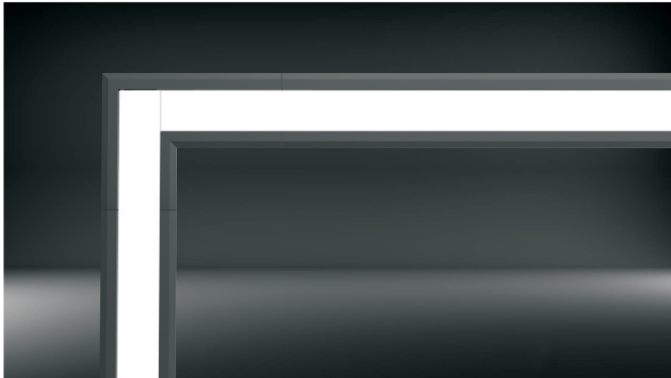

■ Model number: TL4060	LED Color	Finish
Multiple color combinations to choose from 3 Lines design and support PWM dimming Customized length and 10cm/section for cutting	3000K	■ - Black
	4000K	
	5000K	

■  PWM Dimming	 Color Rendition Index (CRI) Character
 Power(Watts)@12~24V input	 Luminous Efcacy Character
 Beaming Angle	 Input Character

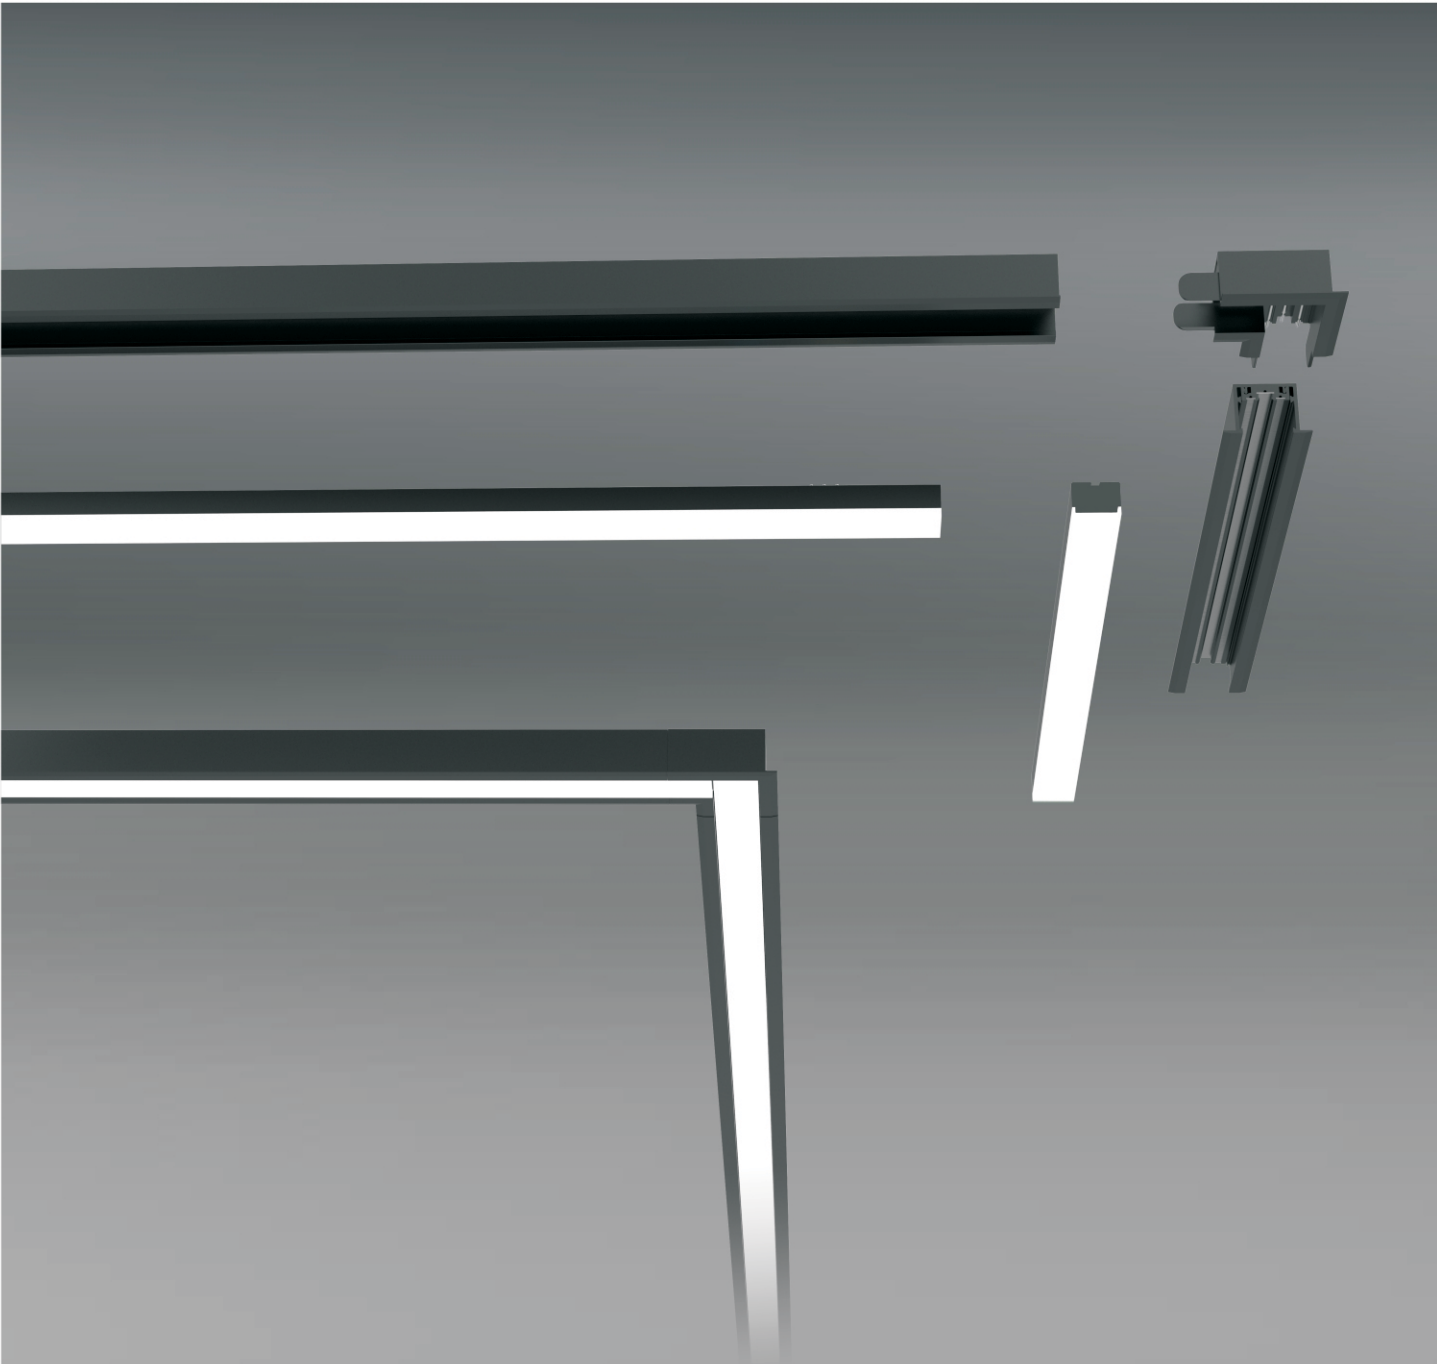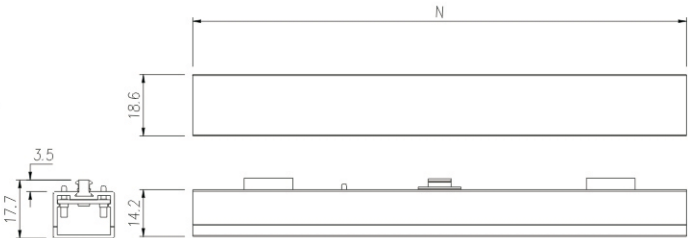



Orion Series- Linear Mintaka




■ Model number: TL4080	LED Color	Lens Cover Color
Multiple color combinations to choose from 3 Lines design and support PWM dimming 12~48VDC self-adaption Positive & negative unlimited	3000K	- Black
	4000K	- Chrome
	5000K	- Gold

■ PWM Dimming	Color Rendition Index (CRI) Character
5*1W Power(Watts)@24V input	Luminous Efcacy Character
20300/45 OPTIC Beaming Angle	Input Character


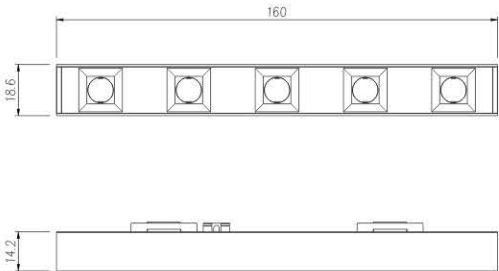


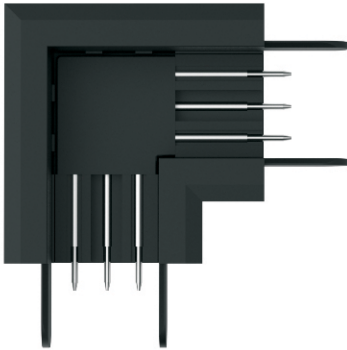



■ 2D Corner Recess
Model number: TR4004

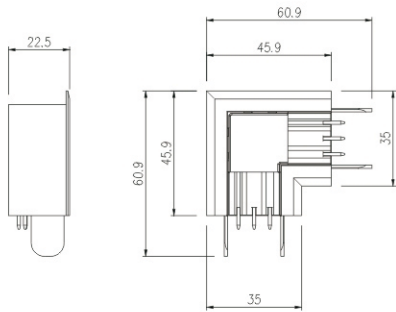


■ 2D Corner Surface
Model number: TR4002

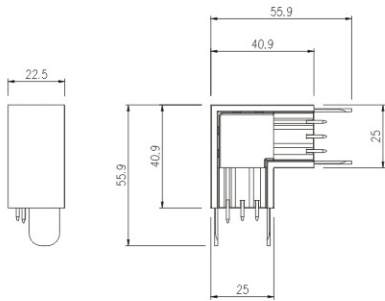


■ 3D Corner Recess
Model number: TR4005

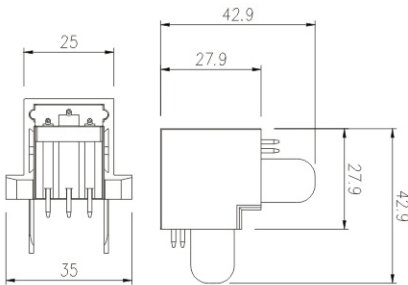

■ 3D Corner Surface
Model number: TR4003

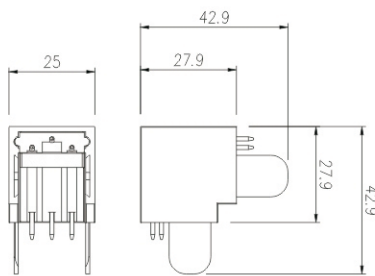

■ Frame Base
Model number:TR4006(2pins)
Model number:TR4007(3pins)
Model number:TR4008 (Wireless)

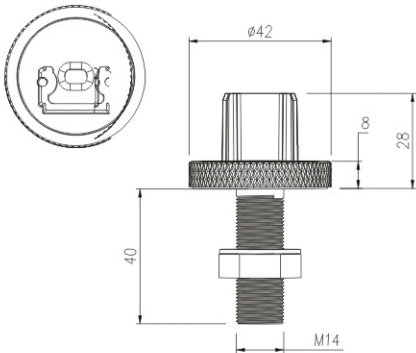

Orion Series - Accessories




■ Ultrathin Track

Model number: TR4U00



■ Surface & Frame Track

Model number: TR4S00(Surface)
Model number: TR4F00(Frame)

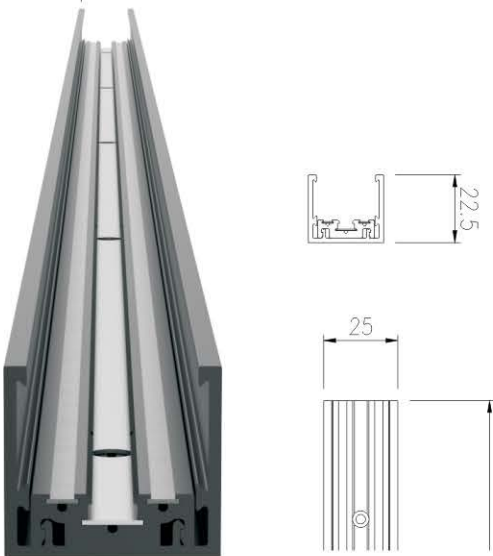


■ Recess Track

Model number: TR4R00




Orion Series - Accessories


■ Block Connetor
Model number: TR4U05




■ Wire Connetor
Model number: TR4U04

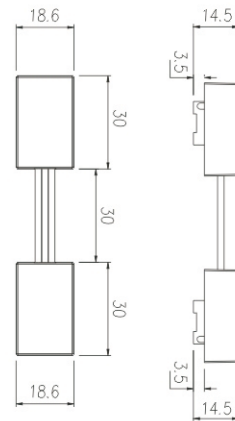


■ Power Connetor
Model number: TR4U02(2pins)
Model number: TR4U03(3pins)

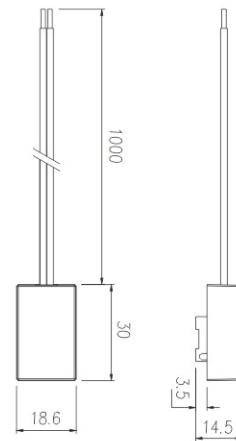


■ End Cap
Model number: TL4U01




■ Linker Pins
Model number: TR4U06

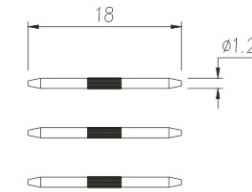


■ 3D Corner Pins
Model number: TR4U08

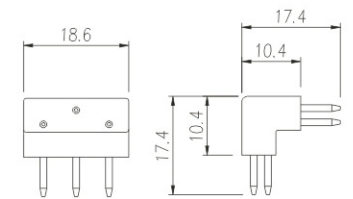

■ 2D Corner Pins
Model number: TR4U07

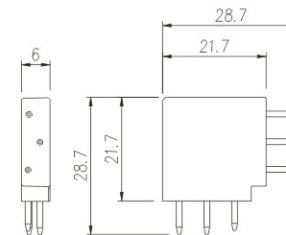

■ Power Plug 2Pins/3Pins
Model number: TR4U12(2pins)
Model number: TR4U13(3pins)

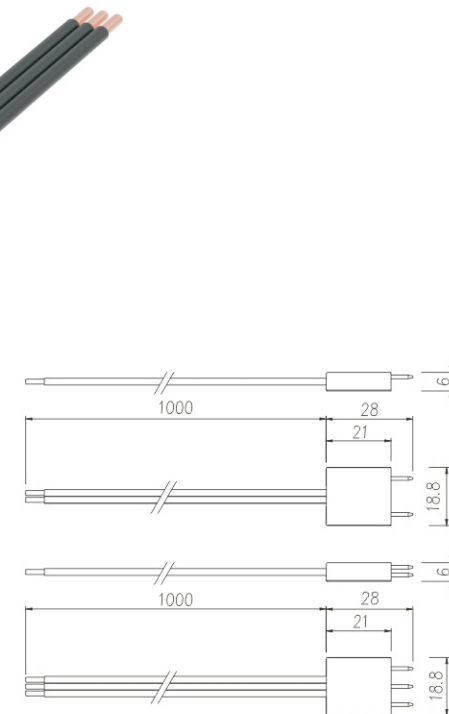

VERTICAL STEM LIGHT

EXCELLENT SHOWCASE LIGHTS MAKE RETAIL SHOP MORE SUCCESSFUL
MAKE YOUR COMMODITIES DISPLAYED OUTSTANDING.



58



59




Vertical Stem Light - Dubhe- Straight & Curve




Stem Light Dubhe	LED Color	Finish
Vertical thread mounting With 1m AWG 22 DC outlet cable Outlet cable with DC plug end	3000K	- Black
	4000K	- White
	5000K	- Silver

ST0070 (Staight)	
Input Character	Color Rendition Index (CRI) Character
Power (Watts)	Luminous Efcacy Character
Beaming Angle	
ST0080 (Curve)	
Input Character	Color Rendition Index (CRI) Character
Power (Watts)	Luminous Efcacy Character
Beaming Angle	

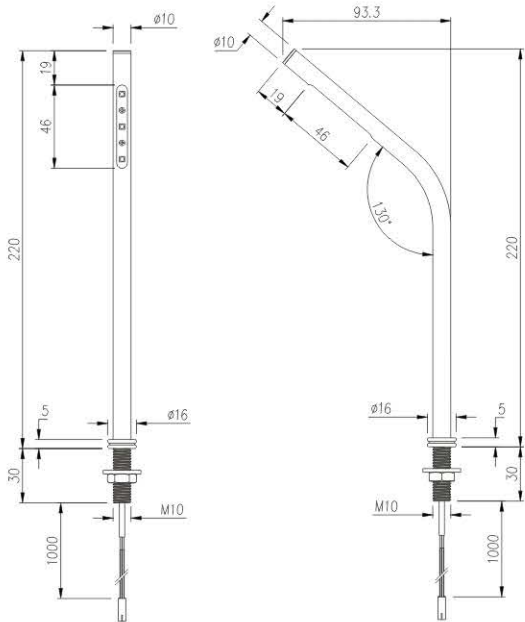

Vertical Stem Light-Merak -1W 2W 3W

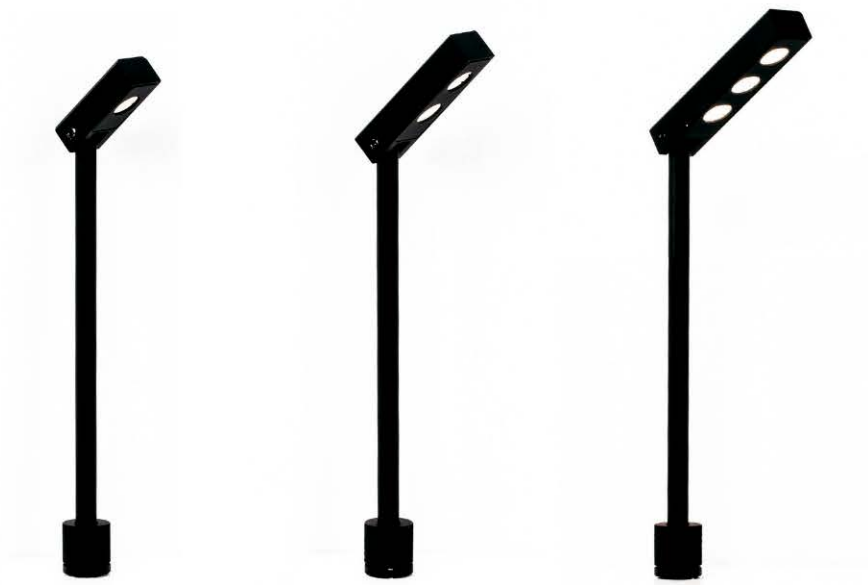

Stem Light Merak	LED Color	Finish
Vertical thread mounting With 1m AWG 22 DC outlet cable Outlet cable with DC plug end	3000K	- Black
	4000K	- White
	5000K	- Silver

ST0010 (1W)


CC 350 mA	Input Character	Ra >90 / >80	Color Rendition Index (CRI) Character
1*1W	Power (Watts)	80lm /W	Luminous Efcacy Character
20°/30°/40° OPTIC	Beaming Angle		

ST0020 (2W)

CC 350 mA	Input Character	Ra >90 / >80	Color Rendition Index (CRI) Character
2*1W	Power (Watts)	80lm /W	Luminous Efcacy Character
20°/30°/40° OPTIC	Beaming Angle		

ST0030 (3W)

CC 350 mA	Input Character	Ra >90 / >80	Color Rendition Index (CRI) Character
3*1W	Power (Watts)	80lm /W	Luminous Efcacy Character
20°/30°/40° OPTIC	Beaming Angle		

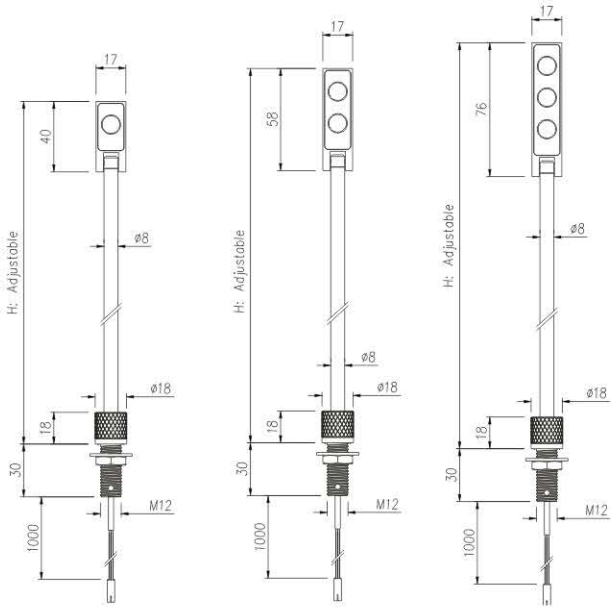

Vertical Stem Light- Stem Light Phecda -1W & 2W



■ Stem Light Phecda	LED Color	Finish
Vertical thread mounting With 1m AWG 22 DC outlet cable Outlet cable with DC plug end	3000K	- Black
	4000K	- White
	5000K	- Silver

CC

350 mA

Input Character

Ra

>90 / >80

Color Rendition Index (CRI) Character

1*1W

Power (Watts)

80lm /W

Luminous Efcacy Character

20°/30°/40°

OPTIC

Beaming Angle

CC

700 mA

Input Character

Ra

>90 / >80

Color Rendition Index (CRI) Character

1*3W

Power (Watts)


65lm /W

Luminous Efcacy Character

20°/30°/40°

OPTIC

Beaming Angle

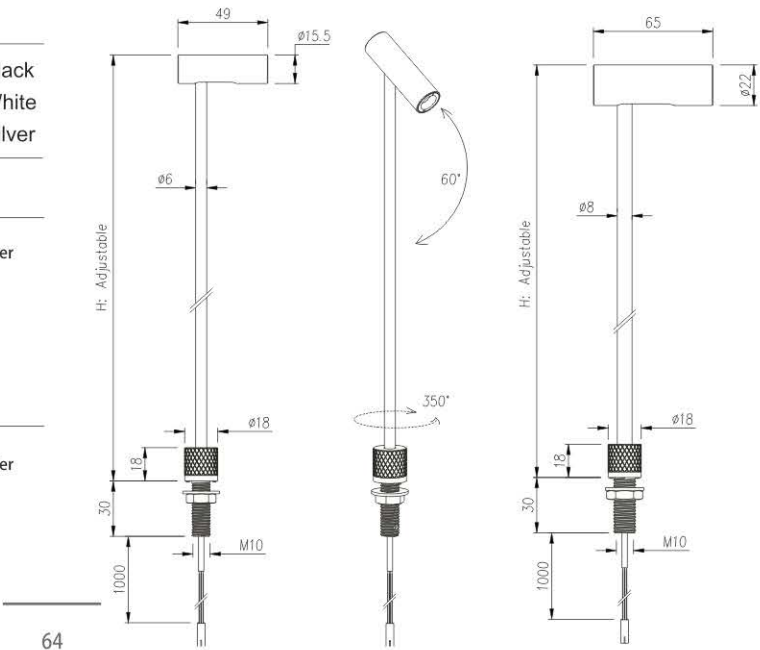


Vertical Stem Light- Stem Light Megrez- 1W




■ Model number: ST0110	LED Color	Finish
Vertical thread mounting	3000K	- Black
With 1m AWG 22 DC outlet cable	4000K	- White
Outlet cable with DC plug end	5000K	- Silver

■ CC 350 mA	Input Character	Ra >90 / >80	Color Rendition Index (CRI) Character
1*3W	Power (Watts)	80lm /W	Luminous Efcacy Character
20302040 OPTIC	Beaming Angle		

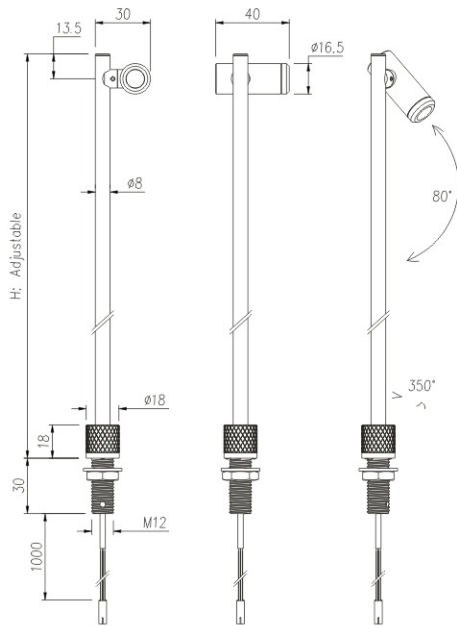


Vertical Stem Light- Stem Light Megrez- 3W

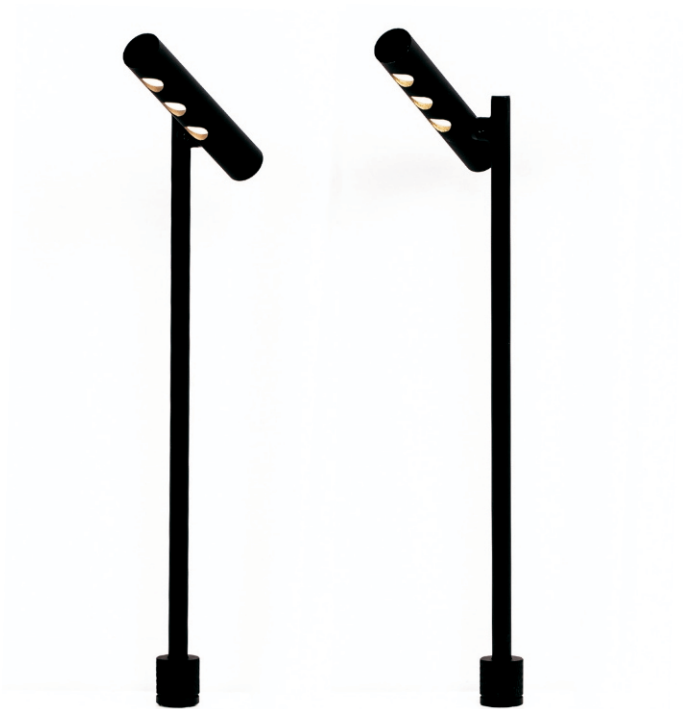

- Model number: ST0050 (Left)
- Model number: ST0060 (Right)
- LED Color
- Finish
- Vertical thread mounting
With 1m AWG 22 DC outlet cable
Outlet cable with DC plug end
- 3000K
- 4000K
- 5000K
- Black
- White
- Silver

- CC 350 mA
- 3*1W
- 20 OPTIC
- Input Character
- Power (Watts)
- Beaming Angle
- Ra >90 / >80
- 70lm /W
- Color Rendition Index (CRI) Character
- Luminous Efcacy Character

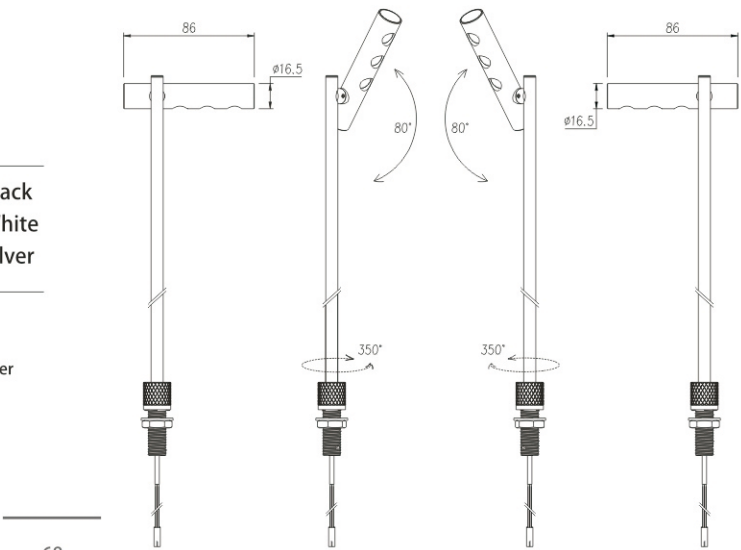

Vertical Stem Light- Stem Light Alioth



- Model number: ST0040




Model number: ST0040
Vertical thread mounting
With 1m AWG 22 DC outlet cable
Outlet cable with DC plug end

LED Color

- ☒ 3000K
- ☐ 4000K
- ☐ 5000K

Finish

- - Black
- - White
- - Silver

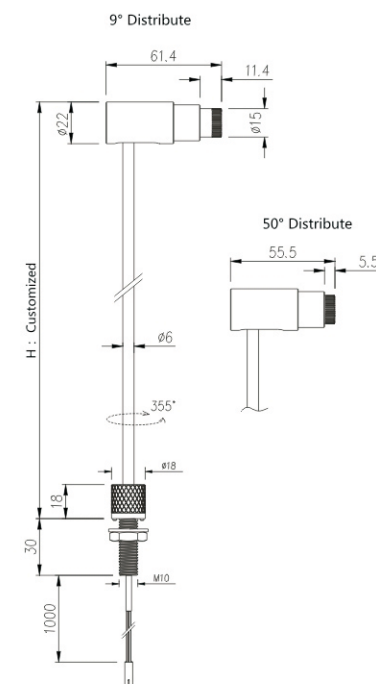


Vertical Stem Light- Stem Light Mizar




■ Model number: ST1120 & ST1220	LED Color	Finish
Model number: ST1120 & ST1220	3000K	- Black
Vertical thread mounting	4000K	- White
With 1m AWG 22 DC outlet cable	5000K	- Silver
Outlet cable with DC plug end		


■ CC 350 mA	Input Character	Ra >90 / >80	Color Rendition Index (CRI) Character
N°1.5W	Power (Watts)	60lm /W	Luminous Efcacy Character
203x30x50 OPTIC	Beaming Angle		

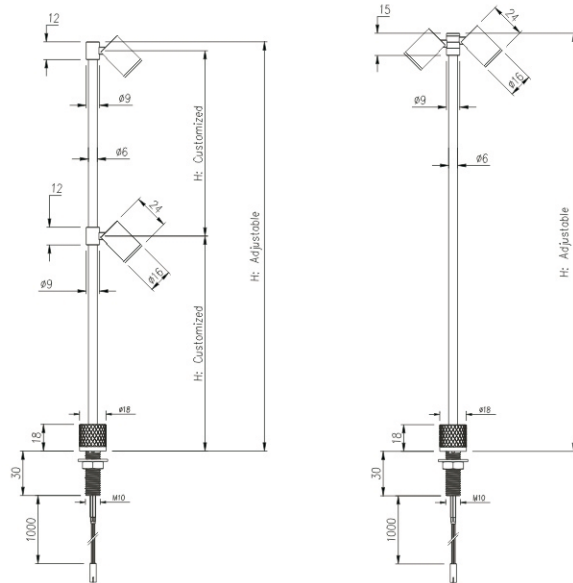


Stem Light_Mizar_Double
Model No.: ST1120

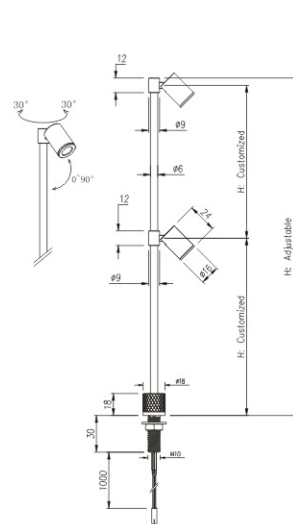


Stem Light_Mizar_Triple
Model No.: ST1130

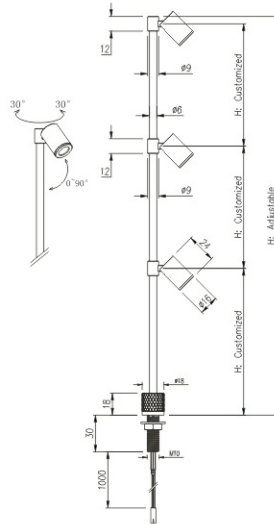

Stem Light_Mizar_Twins
Model No.: ST1220

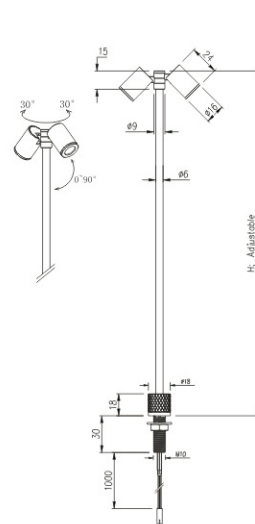

Stem Light_Mizar_Twins Double
Model No.: ST1230

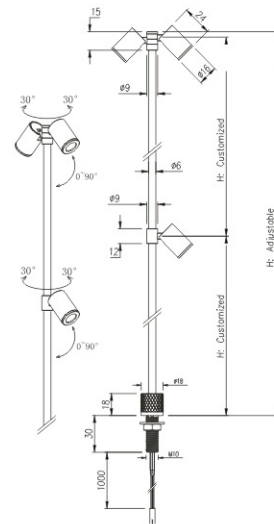

SPECIAL DISPLAY LIGHT

LET' S REFUSE NOBODY IN THIS AGE OF CUSTOMIZATION.
BEING A LIGHTING EXPERT EASY AS CHILDREN BUILD BLOCKS.



Special Display light - Gemini Series -Bridge Assembly



- Model number: DP3010

Magnet fixing and conducting
DIY. length base on each 60mm
Work with EBL specialized joints

LED Color

- ☒ 3000K
- ☐ 4000K
- ☐ 5000K

Finish

- - Black
- - White
- - Silver

■

CV 24V VDC

 Input Character


N*1W Power (Watts)

25° OPTIC Beaming Angle

Color Rendition Index (CRI) Character

80lm
/W

120°
DIFF

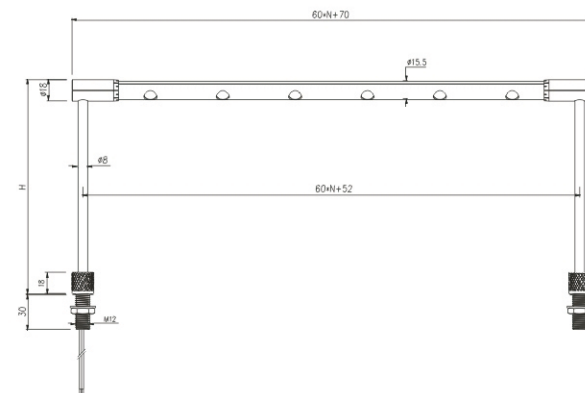




Special Display light - Gemini Series - Frame Assembly



■ Model number: DP4010	LED Color	Finish
Magnet fixing and conducting DIY, length base on each 60mm Work with EBL specialized joints	3000K	■ - Black
	4000K	□ - White
	5000K	■ - Silver

■ CV 24V VDC Input Character	Ra >90/ >80 Color Rendition Index (CRI) Character
N° 0.85W Power (Watts)	80lm /W Luminous Efcacy Character
150 OFF Beaming Angle	25 OPTIC Beaming Angle

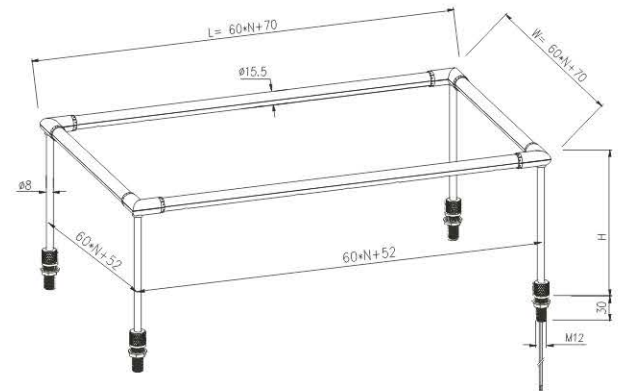




Special Display light - Gemini Series - Accessories


Joint G / J

Model number: DP0070 (G)
Model number: DP0100 (J)



Joint B / D

Model number: DP0020 (B)
Model number: DP0040 (D)




Joint A / C

Model number: DP0010 (A)
Model number: DP0030 (C)




Joint E / F / H / I

Model number: DP0050 (E)
Model number: DP0060 (F)
Model number: DP0080 (H)
Model number: DP0090 (I)




Building Stick Pollux

Model number: DP2010



Building Stick Castor

Model number: DP1010




Stem

Model number: DP0240



Base Fit

Model number: DP0110



Mounting Plate

Model number: DP0130






Special Display light - Rukbat Series- Light Bar



■ Model number: DP5010	LED Color	Finish
Magnet fixing and conducting DIY. length base on each 60mm Work with EBL specialized joints Assembly v= Sticker length +35mm*2	3000K	- Black
	4000K	- White
	5000K	- Silver

■ CV 24V DC Input Character	Ra >90/ >80 Color Rendition Index (CRI) Character
N*1W Power (Watts)	80lm /W Luminous Efcacy Character
20° OPTIC Beaming Angle	

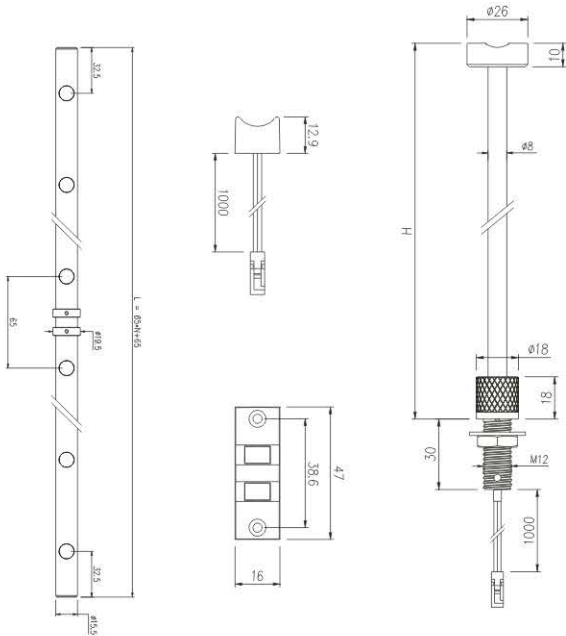







NORLUX®

Lighting Solutions

NORLUX AS

Borgeskogen 32
3160 Stokke

33 30 10 80

post@norlux.com

www.norlux.com