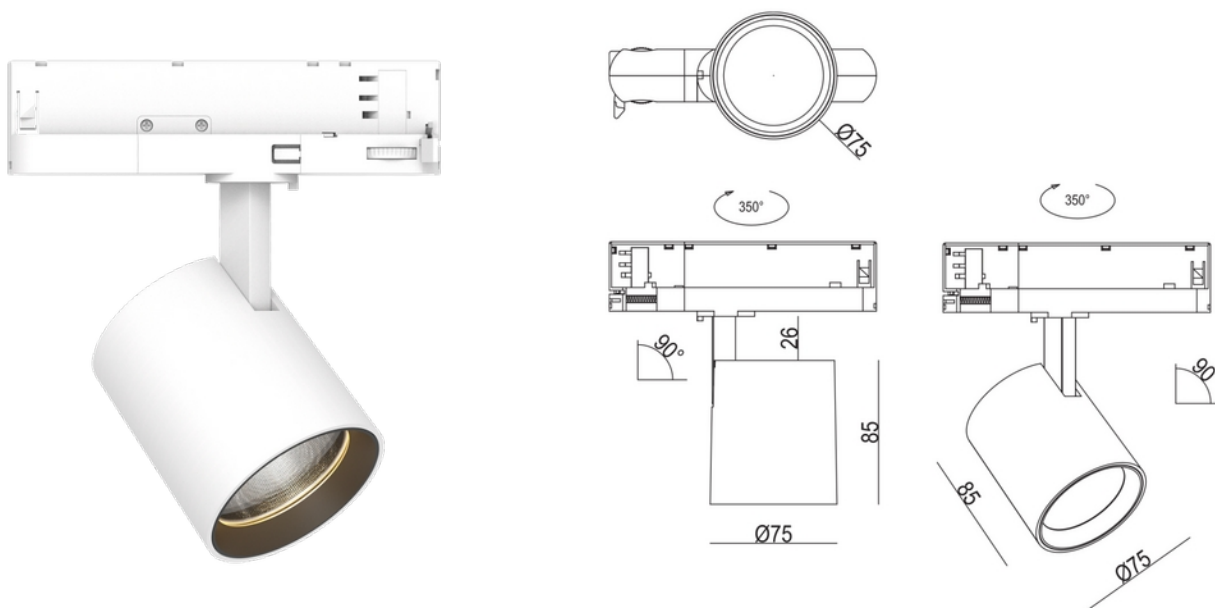


**FDV DOCUMENTATION**

Rod Mini C 1800lm Artic White 932 20° 15W WH 3-circuit

Art.no: 102532-20-3

*Lighting Solutions*

Rod Mini C 1800lm Artic White 932 20° 15W WH 3-circuit



PRODUCT DESCRIPTION

Rod Mini C is a compact and elegant spotlight developed for 3-phase track systems, combining high efficiency with exceptional flexibility. It delivers impressive lumens per watt, placing it among the top performers in terms of efficiency and energy savings. With its extensive adjustment capabilities, Rod Mini C is ideal for retail environments and other applications where precise lighting is essential. It gives lighting designers full control over beam direction and visual expression, making it easy to create both atmospheric and functional lighting installations. The spotlight is available in three different colours and with two reflector options, allowing it to be adapted to various interior styles and project requirements. For enhanced visual comfort and reduced glare, a honeycomb louvre is available as an optional accessory.

FUNCTIONALITY DESCRIPTION

Rod Mini C is a compact and elegant spotlight designed for 3-phase track systems, offering high efficiency and great flexibility. It provides impressive lumen output per watt, delivering excellent lighting performance while maintaining low energy consumption. The spotlight features extensive adjustment options, making it particularly suitable for retail spaces and environments where accurate lighting control is important. It allows precise positioning of the light beam to highlight products, objects or architectural elements. Available in three colours and with two reflector alternatives, Rod Mini C can be tailored to different lighting concepts and interior designs.

MAINTENANCE

Clean with a dry cloth

**FDV DOCUMENTATION**

Rod Mini C 1800lm Artic White 932 20° 15W WH 3-circuit

Art.no: 102532-20-3

*Lighting Solutions*

SPECIFICATIONS	
Type of Dimming (system)	None
IK	IK02
Operating temperature (°C)	45
Color Code	932
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lifetime (h)	L80: 100 000
MacAdam (SDCM)	3
Forward Voltage LED (max tp=25) (V)	38.0
Forward Voltage LED (min tp=65) (V)	33.0
Protection Class (driver)	2
Dimming (driver)	None
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	1050
CC (forward voltage driver) (V)	42.0
Inrush current time (µs)	70.0
Inrush current I _{max} (A)	2.025
Width (product) (mm)	75.0
Height (product) (mm)	85.0
Weight (product) (kg)	0.53
Diameter (product) (mm)	75.0
Color	White
RAL Code	RAL9010
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit