


NWC 20A Zone Controller

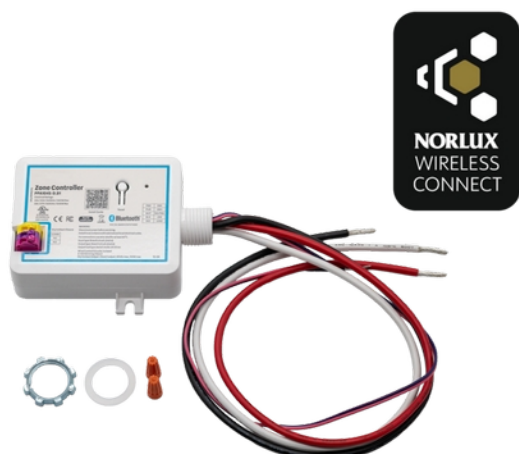

20A relay that provides wireless control of multiple light fixtures. By using a dry contact output (normally open/normally closed), signals can also be sent to third-party systems for integration, such as HVAC.

ELECTRICAL DATA

Input Power	2400W maks 120V, 5540W maks 277V
Max Power (A)	20.0

TECHNICAL DATA

IP (system)	IP20
Operating temperature (°C)	-30 - 55

CONTROL SYSTEM

Norlux Wireless Connect	Implemented
Two-way radio frequency	Yes
Dimming	Class 2, 0-10V DC 10mA Maks
System	NWC




DIMENSIONS	
Length (product) (mm)	101.0
Width (product) (mm)	70.8
Height (product) (mm)	29.9

MATERIALS AND SURFACES	
Color	Grey

INSTALLATION AND CONNECTION	
Areas of use	Inndoor
Mounting	Surface

WIRING

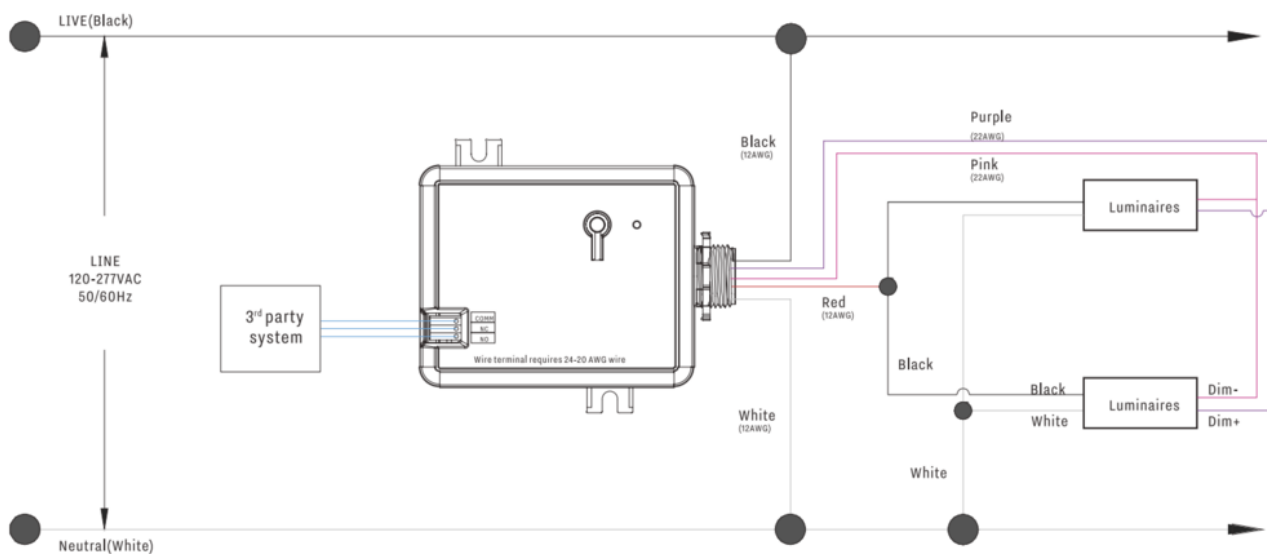

Please note: the "COMM/NC" is for normal close dry contact. "COMM/NO" is for normal open dry contact output.