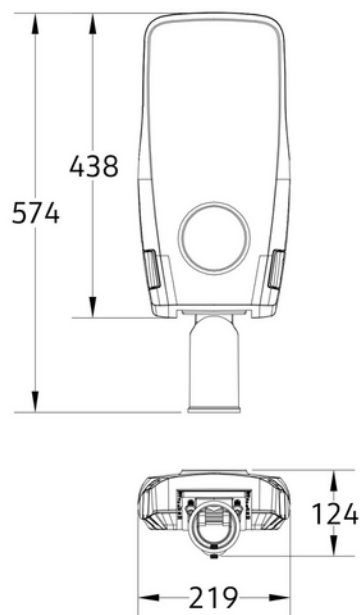


**FDV DOCUMENTATION**

Montana S 3BV30-Z 6m cable DALI w/o Zhaga

Art.no: 103022-30-BV-1-ddd

*Lighting Solutions*

Montana S 3BV30-Z 6m cable DALI w/o Zhaga



SPECIFICATIONS	
Type of Dimming (system)	DALI2, D4i
IK	IK08
Operating temperature (°C)	50
Wind force (EPA) (m ²) at 0°	0.11
Color Code	730
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lifetime (h)	L90B10: 100 000
MacAdam (SDCM)	5
Forward Voltage LED (max tp=25) (V)	22.2
Forward Voltage LED (min tp=65) (V)	21.7
Protection Class (driver)	1 or 2
Dimming (driver)	DALI2, D4i

**FDV DOCUMENTATION**

Montana S 3BV30-Z 6m cable DALI w/o Zhaga

Art.no: 103022-30-BV-1-ddd

*Lighting Solutions*

SPECIFICATIONS	
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	1050
CC (forward voltage driver) (V)	57.0
Inrush current time (μ s)	352.0
Inrush current I _{max} (A)	46.4
Length (product) (mm)	574.0
Width (product) (mm)	219.0
Height (product) (mm)	124.0
Weight (product) (kg)	4.9
Diameter (product) (mm)	76.0
Color	Grey
RAL Code	Pantone8403C
Mounting	Mast Ø60-76
Connection (system)	Cabel 6m 4x1,5mm ² open end
Emergency light (h)	No Emergency light
Emergency light testing	N/A