




PRODUCT DATA SHEET

Montana S 3BV30-Z 6m cable DALI w/o Zhaga

Art.no: 103022-30-BV-1-ddd



Lighting Solutions

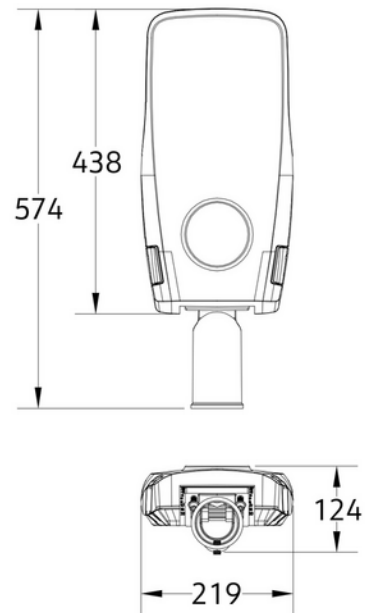

Montana S 3BV30-Z 6m cable DALI w/o Zhaga



Montana feature an innovative, tool-free system that allows for easy replacement of the electrical compartment directly on-site. This ensures fast and efficient maintenance while significantly reducing labor costs and downtime. The sleek and aerodynamic design minimizes wind resistance, enhances reliability, and optimizes heat dissipation, resulting in an extended lifespan. Built to withstand challenging conditions such as Nordic roads and high-altitude environments, Montana deliver dependable performance even in extreme settings.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	DALI2, D4i
Voltage (system) [V]	230V 50Hz
Lightsource Max. Power (W) if Socket	24PCS/25.7W@3000K
Emergency light (h)	No Emergency light
Emergency light testing	N/A

TECHNICAL DATA	
IK (system)	IK08

**PRODUCT DATA SHEET**

Montana S 3BV30-Z 6m cable DALI w/o Zhaga

Art.no: 103022-30-BV-1-ddd



TECHNICAL DATA	
IP (system)	IP66
Outdoor	Yes
Operating temperature (°C)	-40 - 50
Wind force (EPA) (m ²) at 0°	0.11

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	140
CRI / Ra (>=)	70
CCT (Color Temperature) (K)	3000
Color Code	730
Lightsources Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	PMMA
Lifetime (h)	L90B10: 100 000
MacAdam (SDCM)	5
Manufacturer (light source)	Osram
Forward Current LED (min-max) (mA)	10 - 200
Forward Voltage LED (max tp=25) (V)	22.2
Driftspenning LED (min tp=65) (V)	21.7

DRIVER	
Manufacturer (driver)	Inventronics
Protection Class (driver)	1 or 2
Standby power Psb (W) <	0.5
Flicker metric (Pst LM) <	0.007
Stroboscopic effect metric (SVM) <	0.005
Max Output Voltage (V)	75
Dimming (driver)	DALI2, D4i
Dimming Minimum Level (%)	10.0
IP (driver)	IP20
Expected Lifetime (driver) (h)	110000
Flicker-free	Yes
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	70 - 1050
CC (forward voltage driver) (V)	19.0 - 57.0

**PRODUCT DATA SHEET**

Montana S 3BV30-Z 6m cable DALI w/o Zhaga

Art.no: 103022-30-BV-1-ddd



DRIVER	
Surge Protection	L_N = 10KV
Output Current Tolerance (%)	5.0
Current Ripple (%)	10.0
Max load pr circuit - B10	4
Max load pr circuit - B16	7
Max load pr circuit - C10	8
Max load pr circuit - C16	12
Max load pr circuit - C20	16
Max load pr circuit - C25	20
Max load pr circuit - C32	24
Leakage current (mA)	0.7
Inrush current time (µs)	352.0
Inrush current I _{max} (A)	46.4

DIMENSIONS	
Length (product) (mm)	574.0
Width (product) (mm)	219.0
Height (product) (mm)	124.0
Weight (product) (kg)	4.9
Diameter (product) (mm)	76.0

MATERIALS AND SURFACES	
Color	Grey
RAL Code	Pantone8403C
Corrosion Class	C4
Surface treatment	Powdercoated
Housing Material	Aluminium
Housing Material %	56.99999999999999
Diffuser Material	PMMA
Diffuser Material%	0.61
Recycled Aluminium %	72.0
Material 2%	5.1
Material 3%	1.71
Material 4%	8.0
Material 5%	15.7

**PRODUCT DATA SHEET**

Montana S 3BV30-Z 6m cable DALI w/o Zhaga

Art.no: 103022-30-BV-1-ddd

*Lighting Solutions*

MATERIALS AND SURFACES	
Material 6%	2.45
Material 7%	0.9199999999999999

INSTALLATION AND CONNECTION	
Areas of use	Outdoor, Parking, Street
Mounting	Mast Ø60-76
Connection (system)	Cabel 6m 4x1,5mm2 open end

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	D
CE mark	Yes
EPD number	NEPD-14087-14414