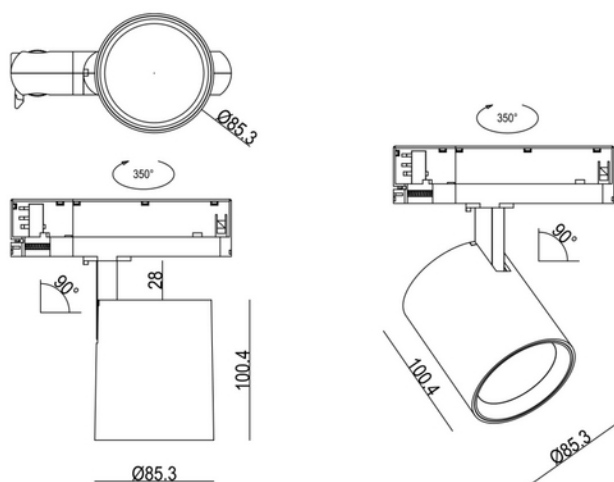


**FDV DOCUMENTATION**

Rod Midi C 4100lm 940 30° 23W BK 3-circuit DALI

Art.no: 102313-30-2-ddd

*Lighting Solutions*

Rod Midi C 4100lm 940 30° 23W BK 3-circuit DALI



PRODUCT DESCRIPTION

Rod Midi C is a powerful and flexible spotlight developed for modern retail, showroom, and project lighting applications. Featuring a sleek cylindrical design and high light output, the luminaire combines aesthetics and performance, making it suitable for both accent and general lighting. Delivering up to 4100 lumens with excellent colour rendering (CRI90), Rod Midi C ensures natural presentation of products, materials, and interior details. Available with multiple beam angles and colour temperatures, the spotlight can easily be adapted to different environments and lighting requirements. It is offered in white, black, or grey finishes and is designed for easy installation in 3-circuit track systems. Selected versions are also available with DALI control for advanced lighting management solutions. Rod Midi C is an ideal choice for retail stores, exhibition areas, galleries, hotels, and restaurants where high lighting quality, flexibility, and an exclusive appearance are essential.

FUNCTIONALITY DESCRIPTION

Rod Midi C is a compact and elegant spotlight designed for 3-circuit track systems, offering high efficiency and exceptional flexibility. It delivers impressive lumens per watt, placing it among the top performers in terms of light output and energy efficiency. With extensive adjustment possibilities, Rod Midi C is ideal for retail environments and applications where precise lighting is critical. It provides lighting designers with full control over direction and visual expression, making it easy to create both functional and atmospheric installations. The spotlight is available in three different colours and with four reflector options, allowing seamless adaptation to a wide range of interiors and lighting requirements.

**FDV DOCUMENTATION**

Rod Midi C 4100lm 940 30° 23W BK 3-circuit DALI

Art.no: 102313-30-2-ddd

**MAINTENANCE**

Clean with a dry cloth

SPECIFICATIONS	
Type of Dimming (system)	DALI2
IK	IK02
Operating temperature (°C)	45
Color Code	940
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
Forward Voltage LED (max tp=25) (V)	38.0
Forward Voltage LED (min tp=65) (V)	33.0
Protection Class (driver)	2
Dimming (driver)	DALI2
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	1050
CC (forward voltage driver) (V)	42.0
Inrush current time (µs)	68.0
Inrush current I _{max} (A)	1.86
Height (product) (mm)	115.0
Weight (product) (kg)	0.7
Diameter (product) (mm)	97.0
Color	Black
RAL Code	RAL9005
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit+dim



FDV DOCUMENTATION

Rod Midi C 4100lm 940 30° 23W BK 3-circuit DALI

Art.no: 102313-30-2-ddd



Lighting Solutions

LIGHT DISTRIBUTION

