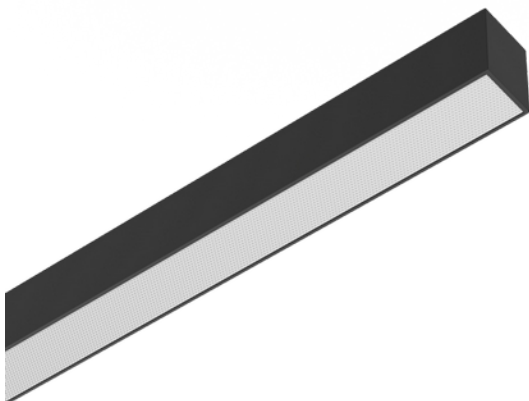


**PRODUCT DATA SHEET**

NLL 55 Module 3600lm 940/930 Microprismatic 30W Dali

Art.no: 103451-1200-02-ddd

*Lighting Solutions*

NLL 55 Module 3600lm 940/930 Microprismatic 30W Dali

**ELECTRICAL DATA**

Protection Class (system)	1
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA

IK (system)	IK06
IP (system)	IP20
IP Front/Back (system)	IP20/20
Outdoor	No
Operating temperature (°C)	-20 - 40

PHOTOMETRIC DATA

Efficacy (system) (lm/W)	120
--------------------------	-----

**PRODUCT DATA SHEET**

NLL 55 Module 3600lm 940/930 Microprismatic 30W Dali

Art.no: 103451-1200-02-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra ($\geq$)	90
CCT (Color Temperature) (K)	3000/4000
Preset CCT if switch(Color Temperature) (K)	3000
Color Code	930/940
Lightsource Type	LED (replaceable)
Socket / Cap-Base	N/A
Lens (Diffuser)	Prismatic
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
UGR ($\leq$)	23
Manufacturer (light source)	Shenzhen leadopto Technology Co.Ltd
Forward Current LED (min-max) (mA)	200 - 350

DRIVER	
Manufacturer (driver)	Boke
Flicker-free	Yes

DIMENSIONS	
Length (product) (mm)	1196.0
Width (product) (mm)	48.0
Height (product) (mm)	42.0
Weight (product) (kg)	0.82

MATERIALS AND SURFACES	
Surface treatment	Powdercoated
Housing Material	Steel
Diffuser Material	Polycarbonate

INSTALLATION AND CONNECTION	
Areas of use	Office
Mounting	Recessed, Surface, Track, Wall
Connection (system)	QuickConnect



PRODUCT DATA SHEET

NLL 55 Module 3600lm 940/930 Microprismatic 30W Dali
Art.no: 103451-1200-02-ddd



Lighting Solutions

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	C
CE mark	Yes