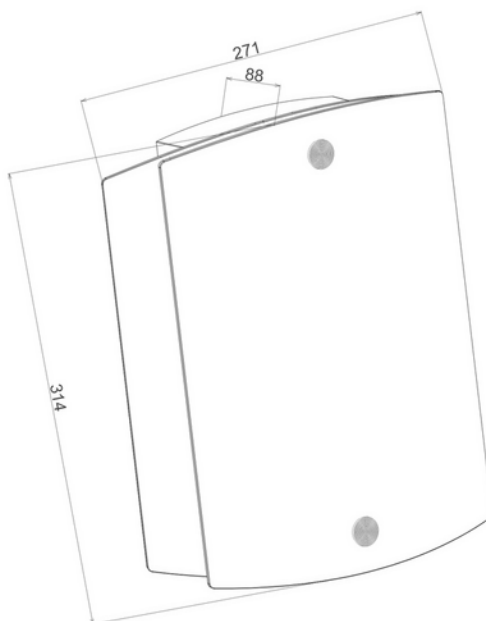


**FDV DOCUMENTATION**

Arc Wall 1300lm 830/840 12W 120° WH Opal Phasecut

Art.no: 6999-120-3-p

*Lighting Solutions*

Arc Wall 1300lm 830/840 12W 120° WH Opal Phasecut



SPECIFICATIONS	
Type of Dimming (system)	Phase-Cut
IK	IK03
Operating temperature (°C)	45
Color Code	830/840
Lightsource Type	LED (built in)
Lifetime (h)	L80: 100 000
MacAdam (SDCM)	3
Forward Voltage LED (max tp=25) (V)	140.0
Forward Voltage LED (min tp=65) (V)	120.0
Protection Class (driver)	2
Dimming (driver)	Phase-Cut
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	84

**FDV DOCUMENTATION**

Arc Wall 1300lm 830/840 12W 120° WH Opal Phasecut

Art.no: 6999-120-3-p

*Lighting Solutions*

SPECIFICATIONS	
CC (forward voltage driver) (V)	140.0
Inrush current time (μs)	144.0
Inrush current I _{max} (A)	13.0
Length (product) (mm)	314.0
Width (product) (mm)	271.0
Height (product) (mm)	88.0
Weight (product) (kg)	2.2
Color	White
RAL Code	RAL9016
Mounting	Surface, Wall
Connection (system)	Terminal
Emergency light (h)	No Emergency light

LIGHT DISTRIBUTION