




NLL 55

INSTALLATION MANUAL

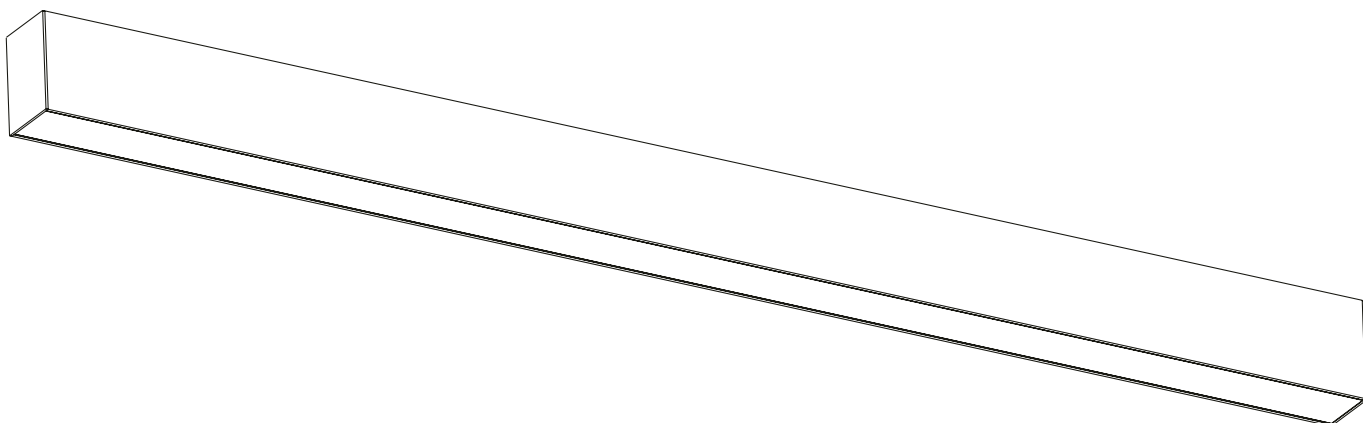


⚠ Safety Notes:

- The product must be installed, maintained, and operated as instructions below.
- Before starting installation of this product, make sure power supply is disconnected.
- Only to be installed by authorized electrician.
- Do not use abrasives or solvents when cleaning.
- Do not install the product if it appears damaged in any way. Check with manufacturer if in doubt.
- Do not modify this fitting in any matter as this will void warranty.
- Check protection class, if class I, it must be earthed.
- Disconnect power supply before maintenance or cleaning.

⚠ Sikkerhetsinformasjon:


- Følg installasjonsmanual for korrekt montering.
- Koble alltid fra strømmen før montering eller vedlikehold.
- Kan kun monteres av autorisert elektriker.
- Monter ikke produktet hvis det er synlig skade. Kontakt forhandler eller produsent.
- Bruk ikke løsemidler ved rengjøring
- Produktet skal ikke under noen omstendigheter endres eller modifiseres.
- Sjekk produktets isolasjonsklasse. Ved isolasjonsklasse I skal produktet jordes.


Linear System Luminaire Manual

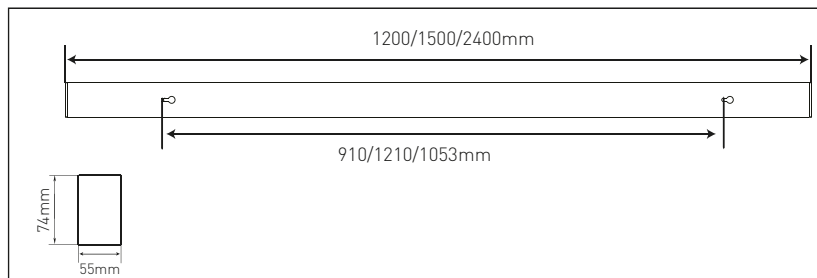

General Safety Information


- Installation, commissioning and maintenance only by qualified electrician.
- Never perform any work on the luminaire with voltage applied. Danger to life due to electric shock!
- Electric connection must be appropriate according to all applicable standards and other national and international safety and accident prevention regulations.
- Damaged luminaires must not be operated.
- Observe and retain safety instructions and mounting instructions.
- No liability is accepted for damages resulting from improper use.
- Use genuine parts only for repair.

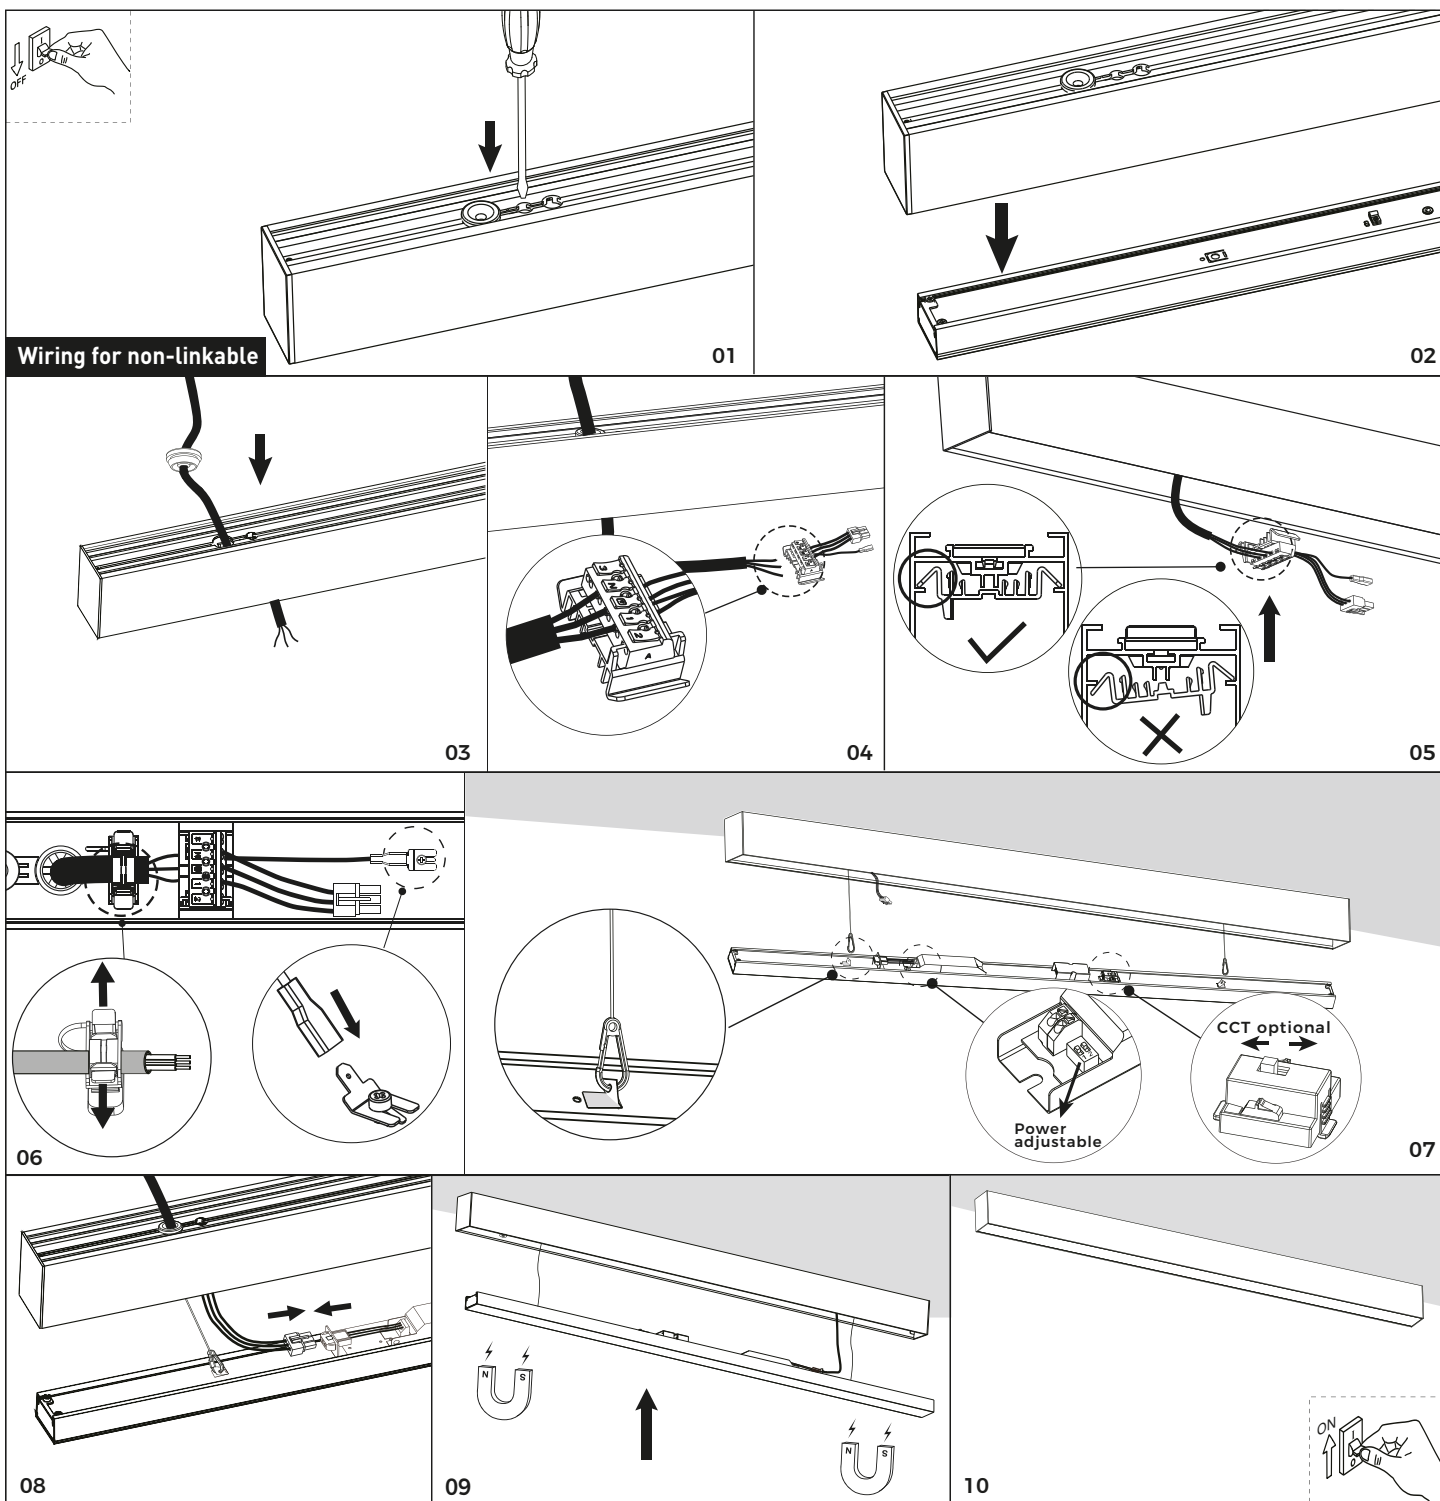

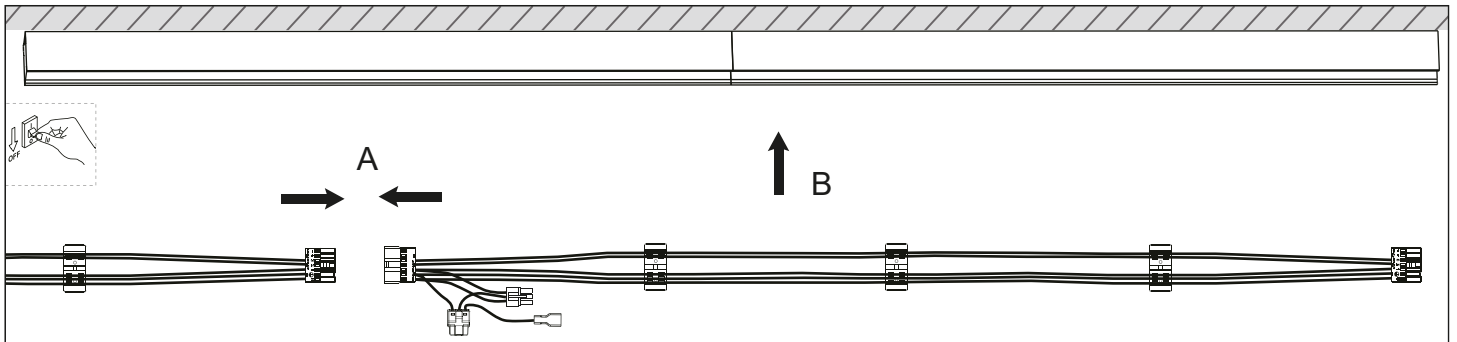


Wiring for linkable


01

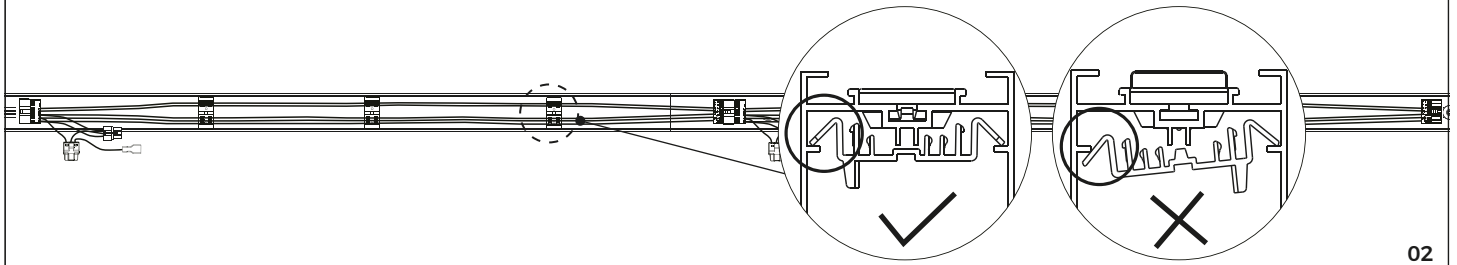

02

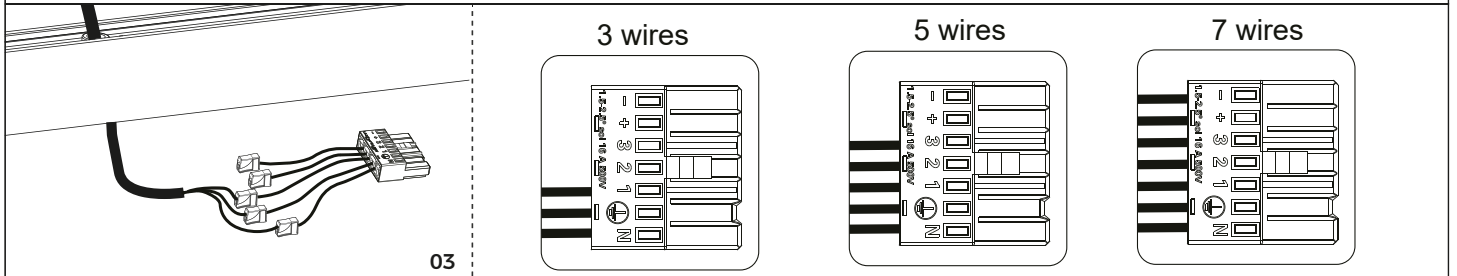


03

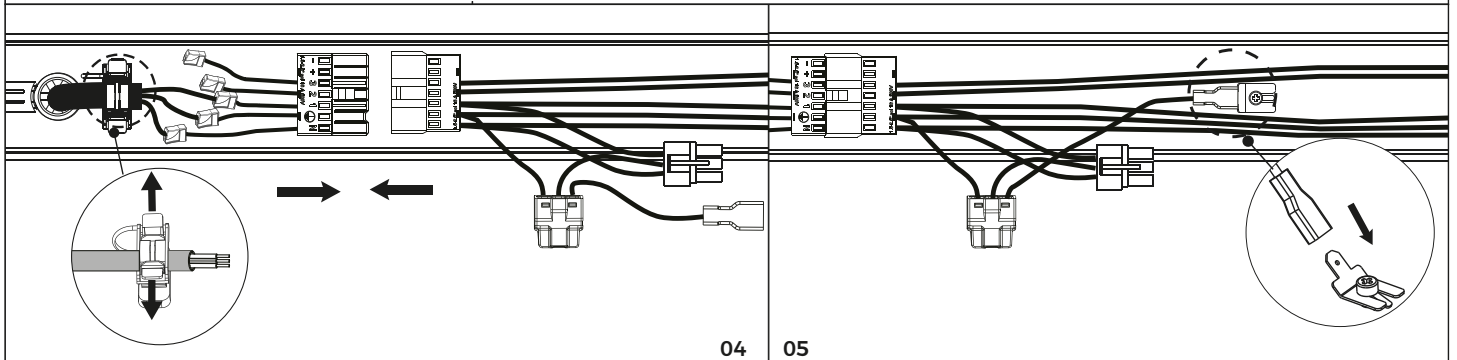


04

05

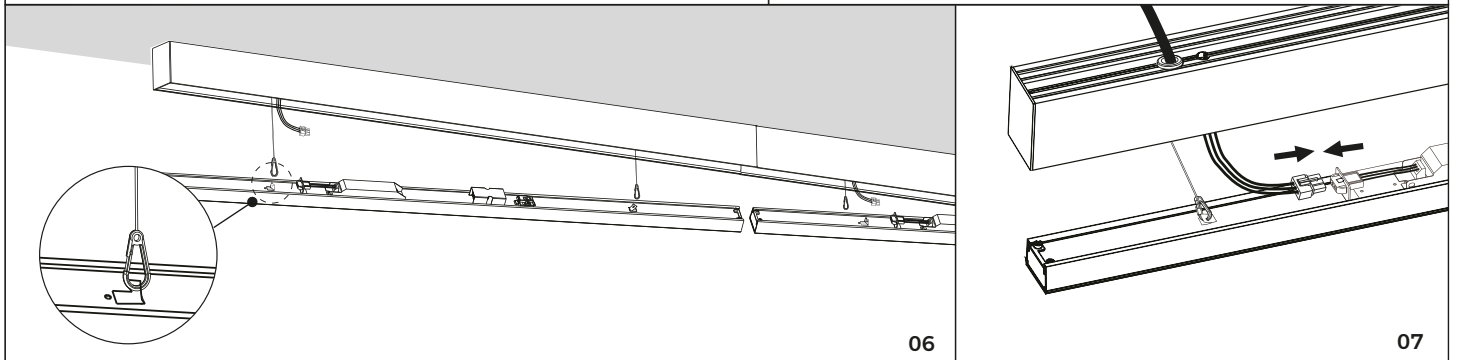





06





07



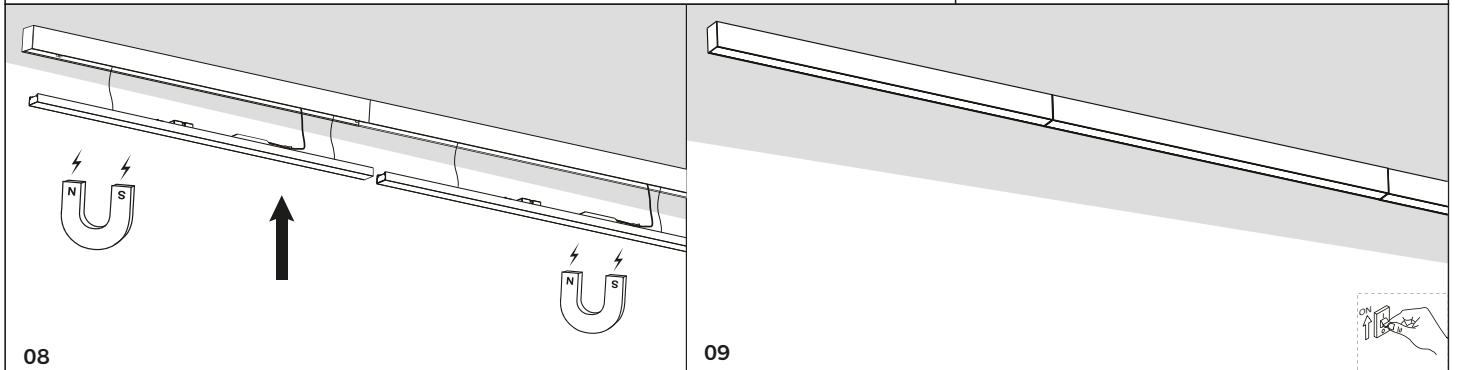





08

09

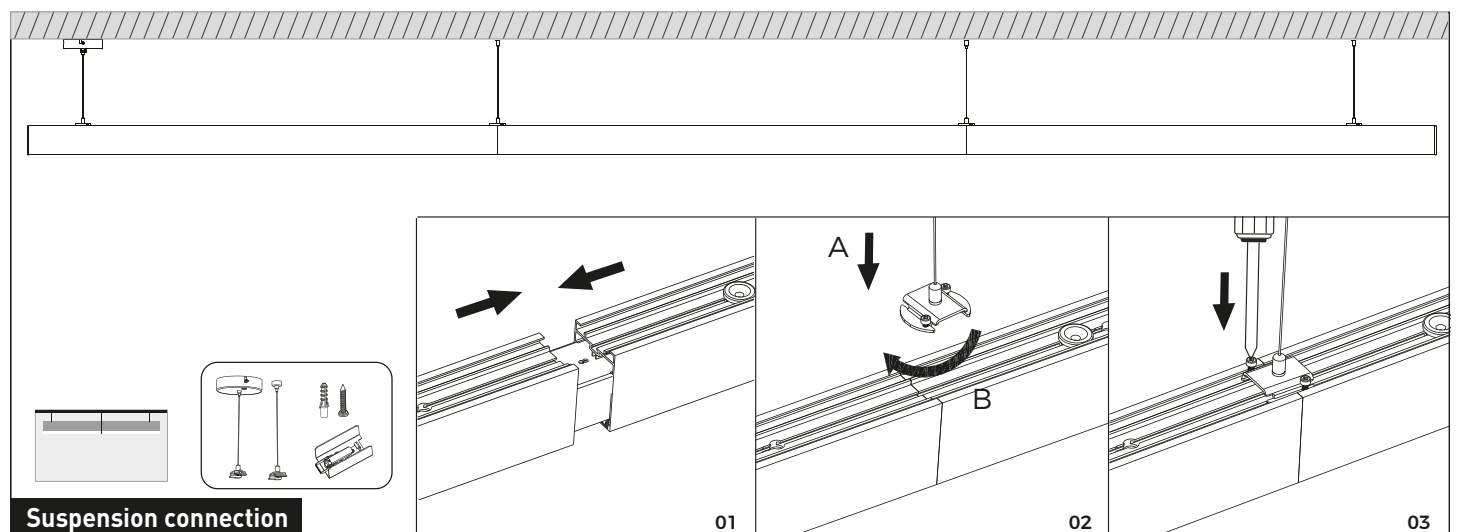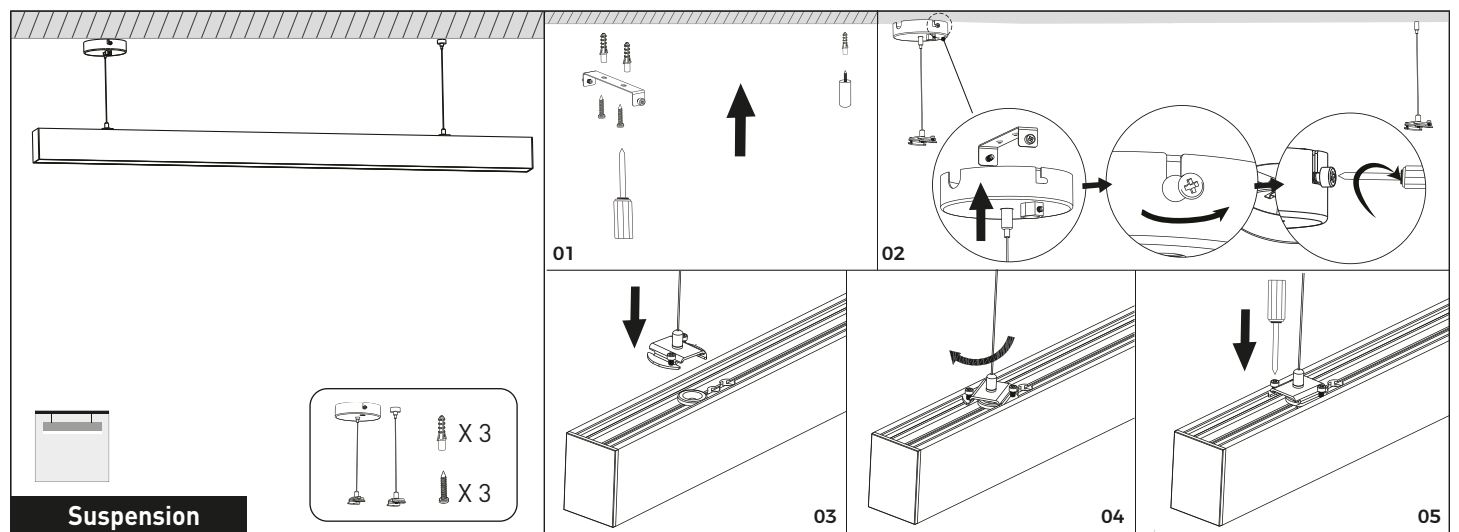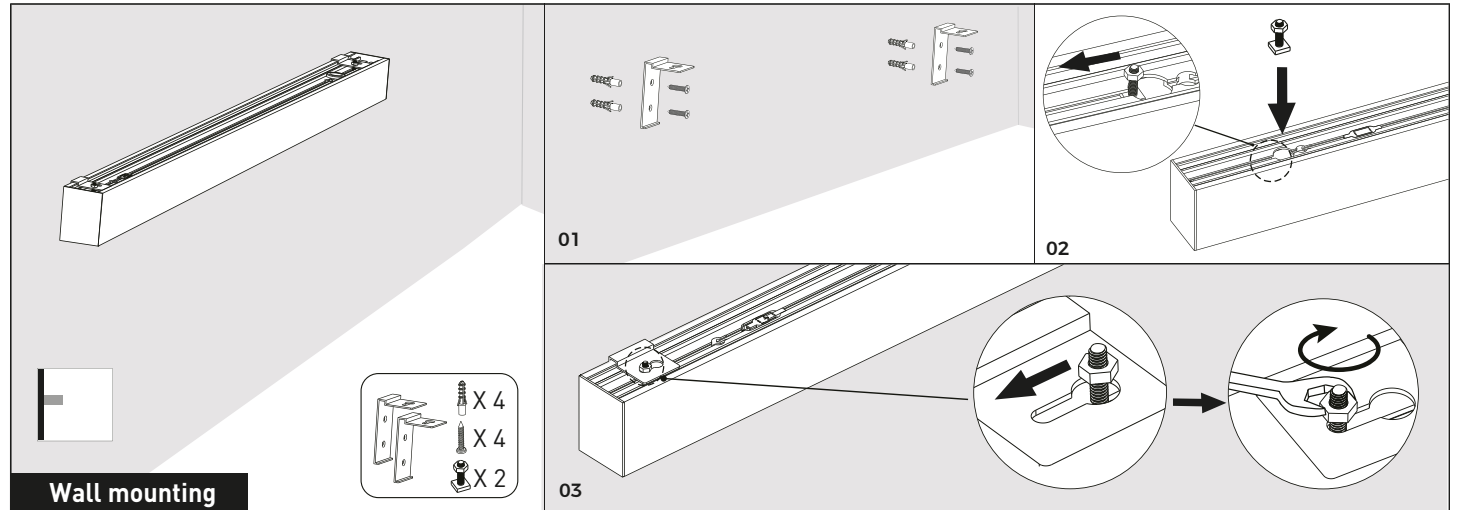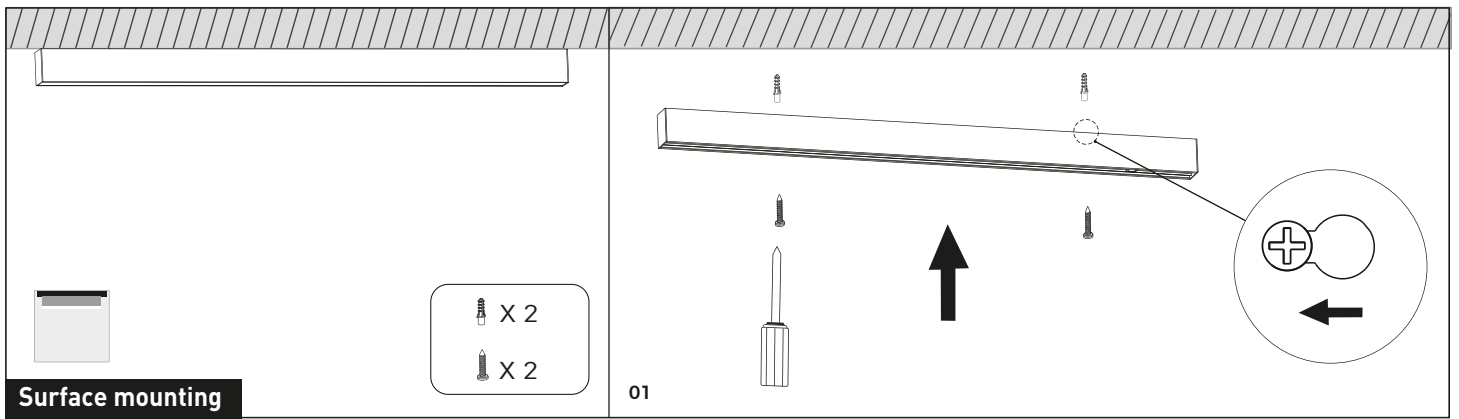

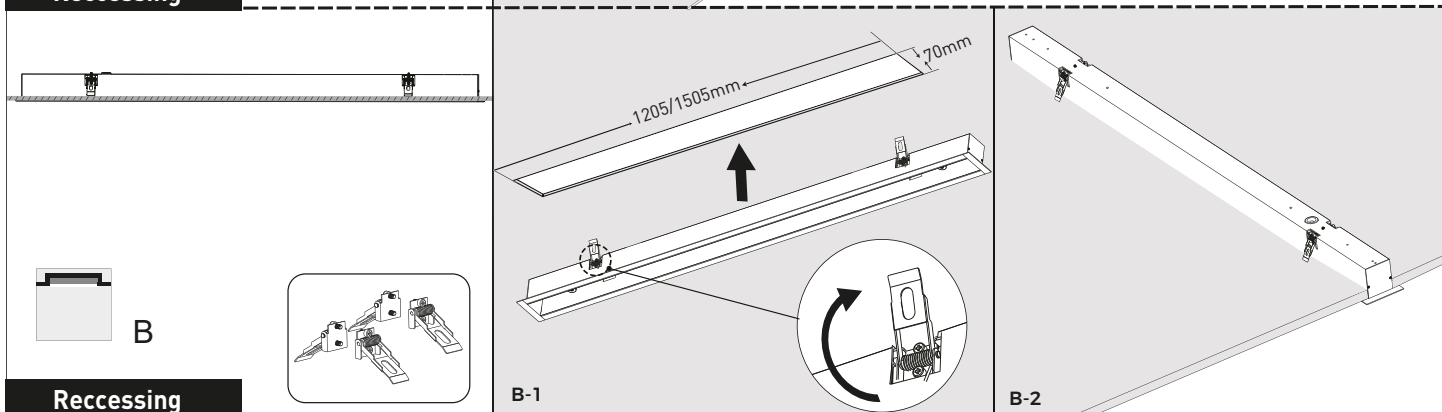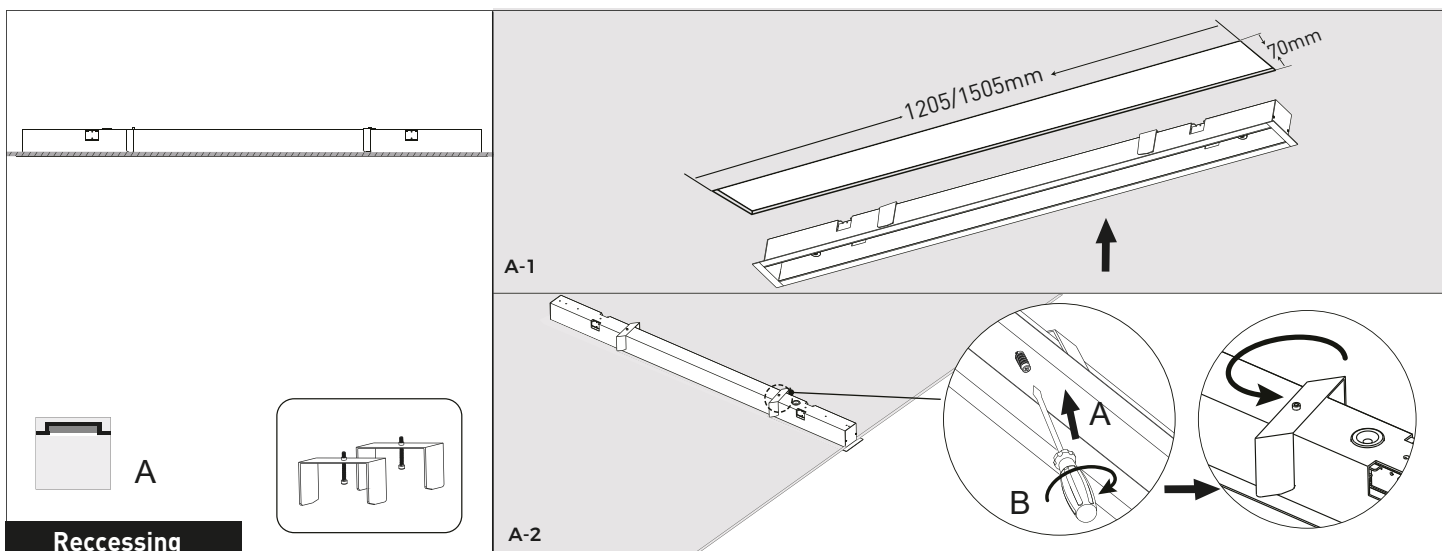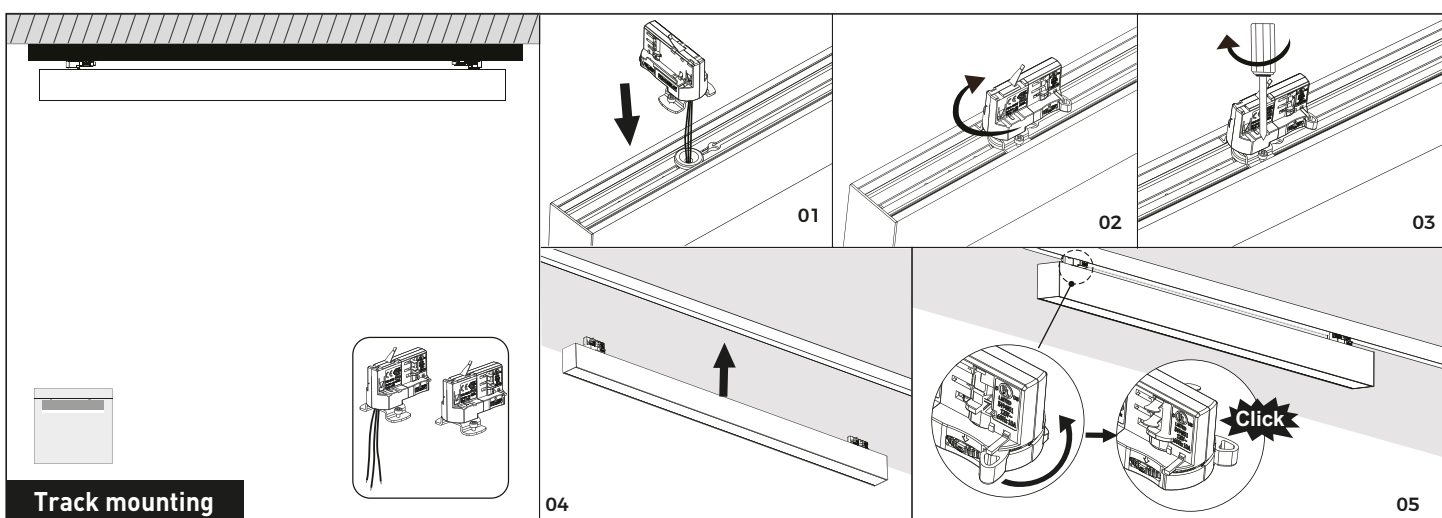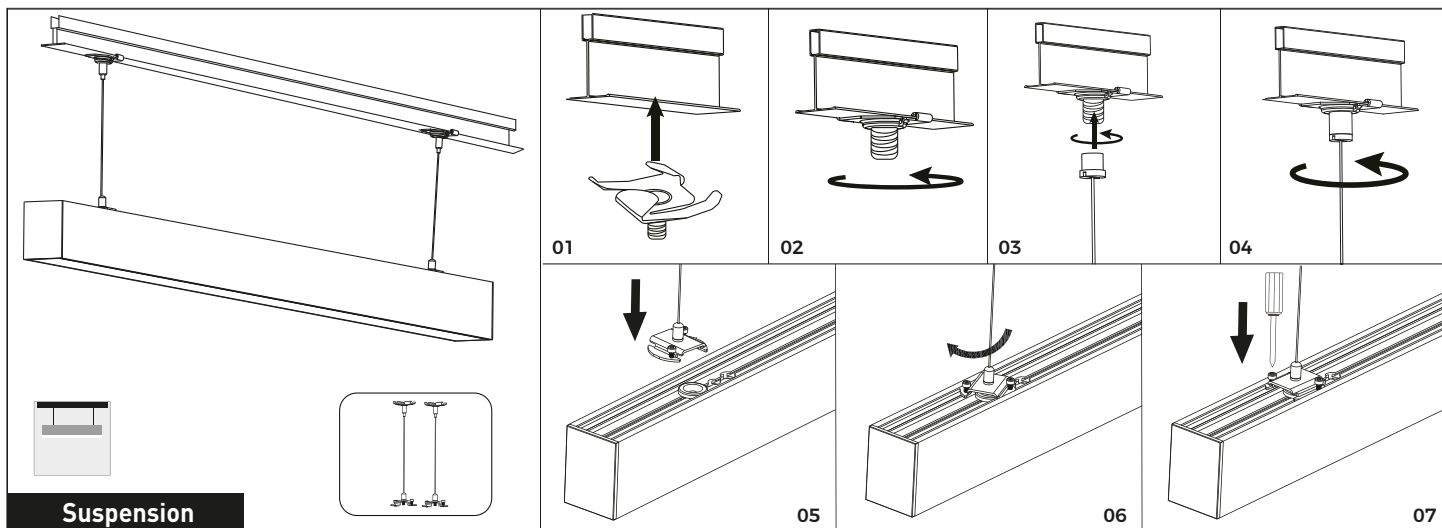

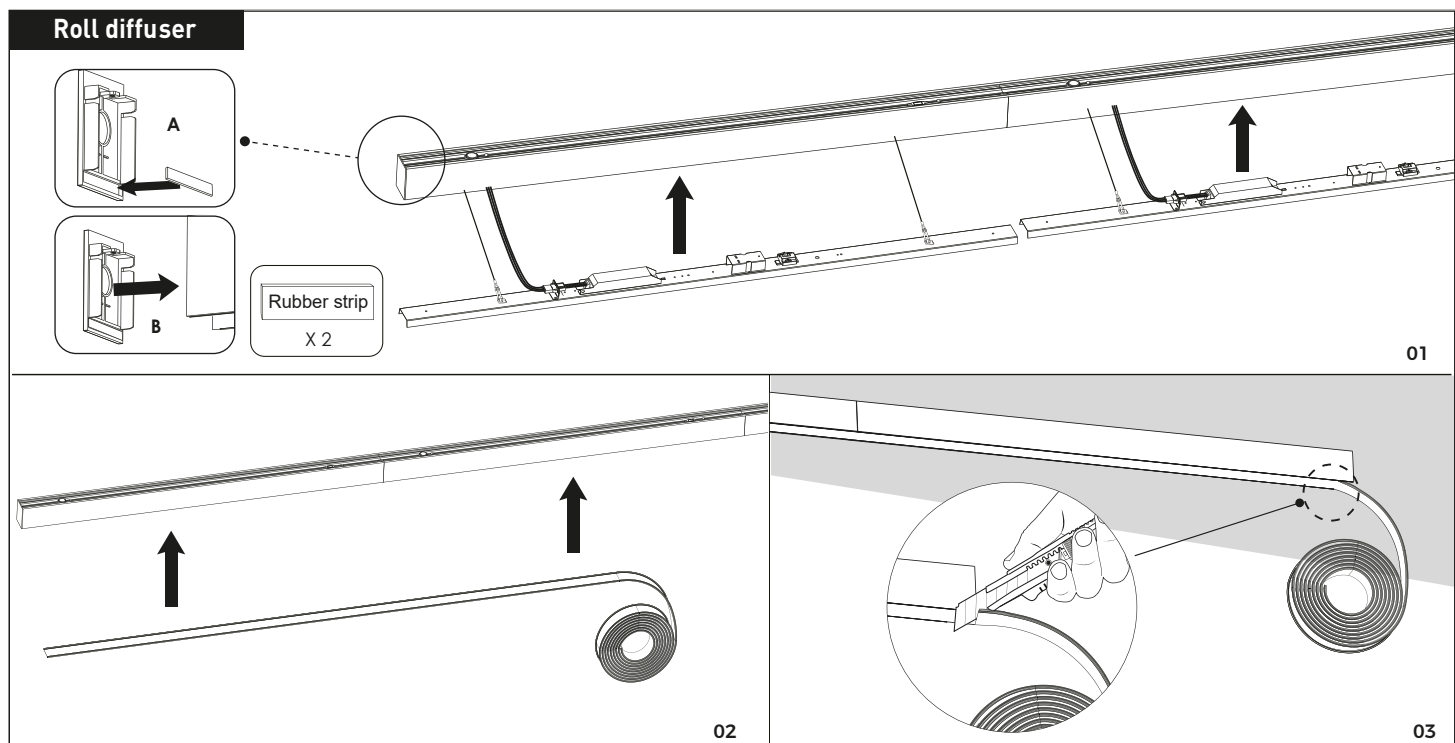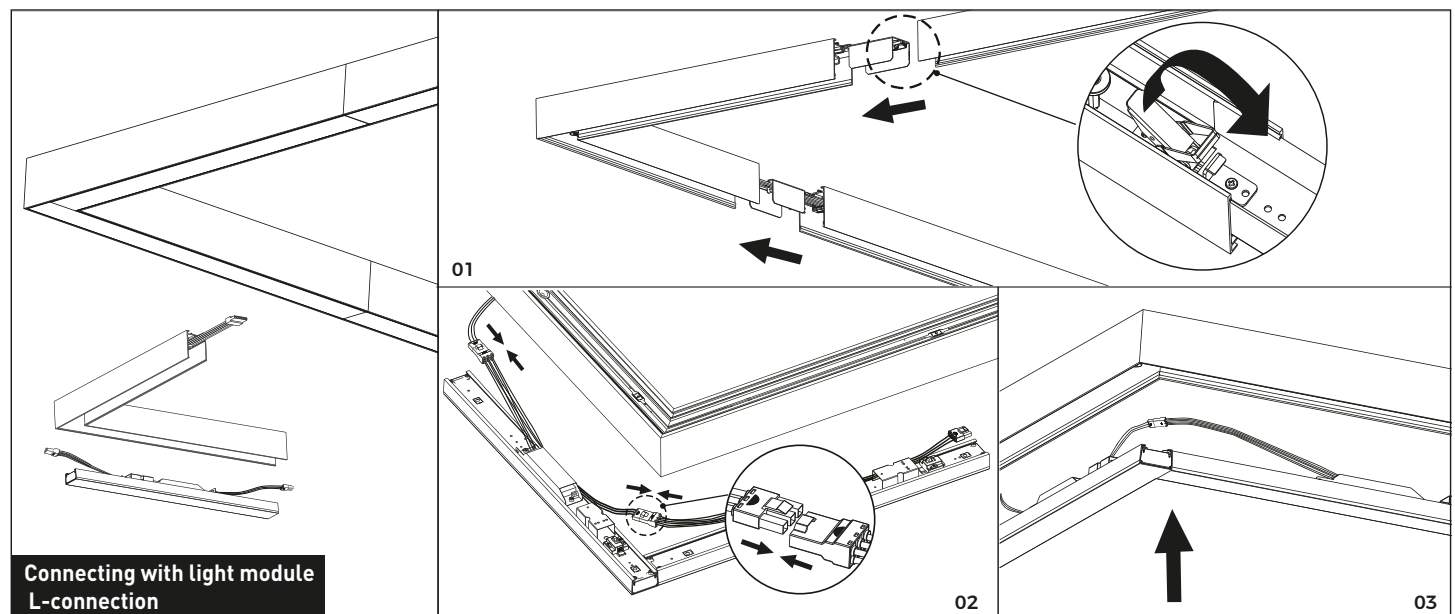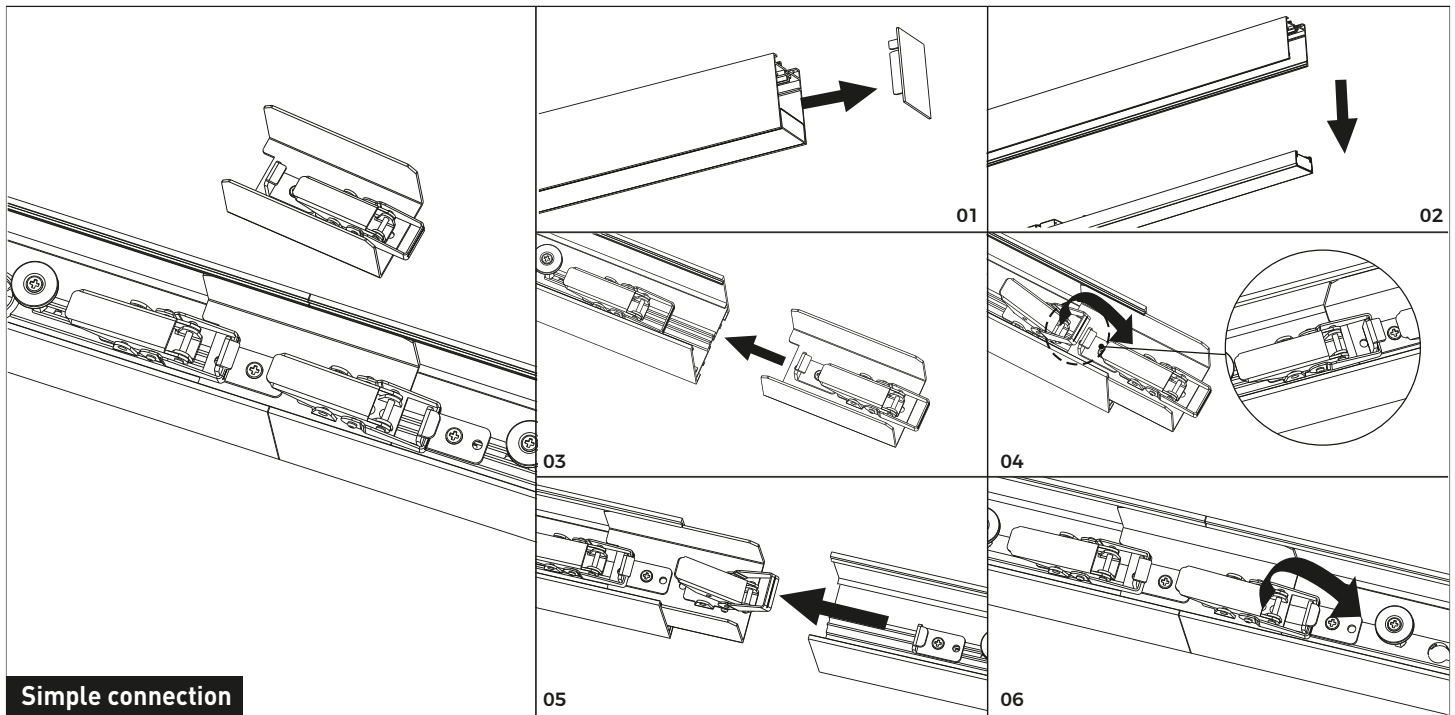

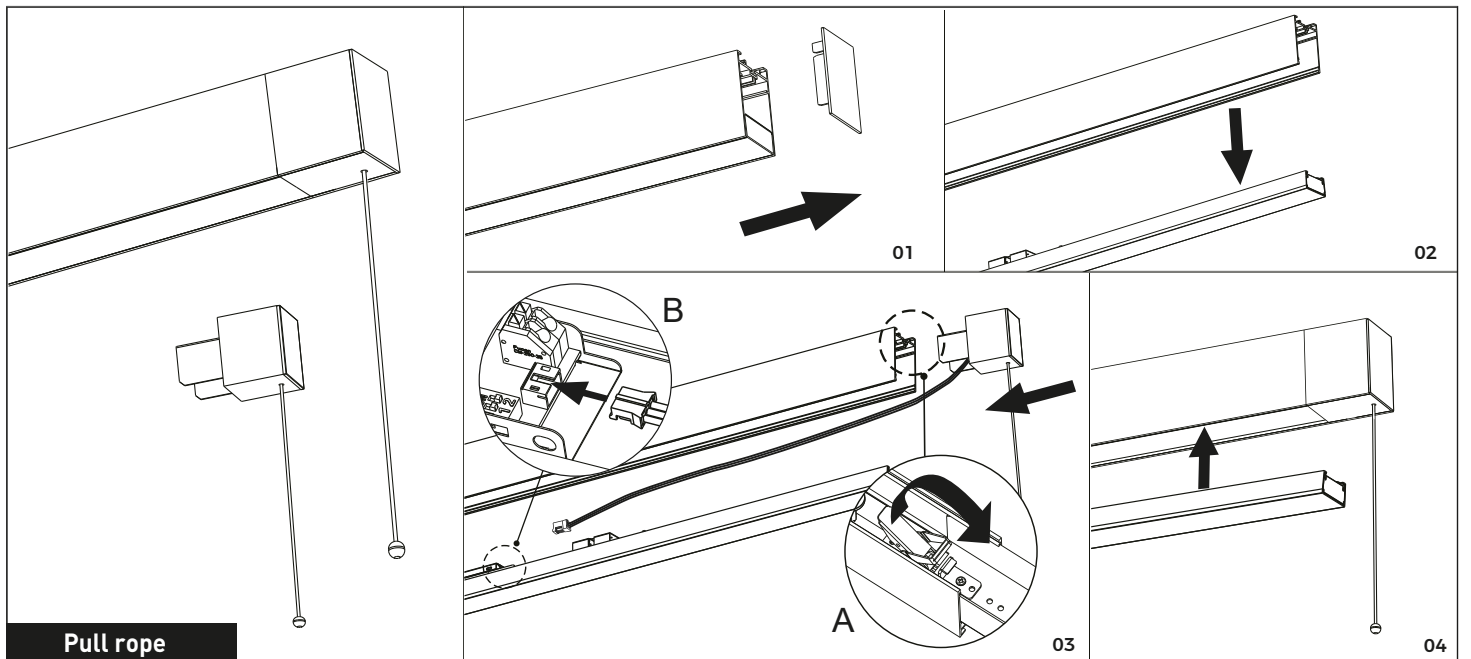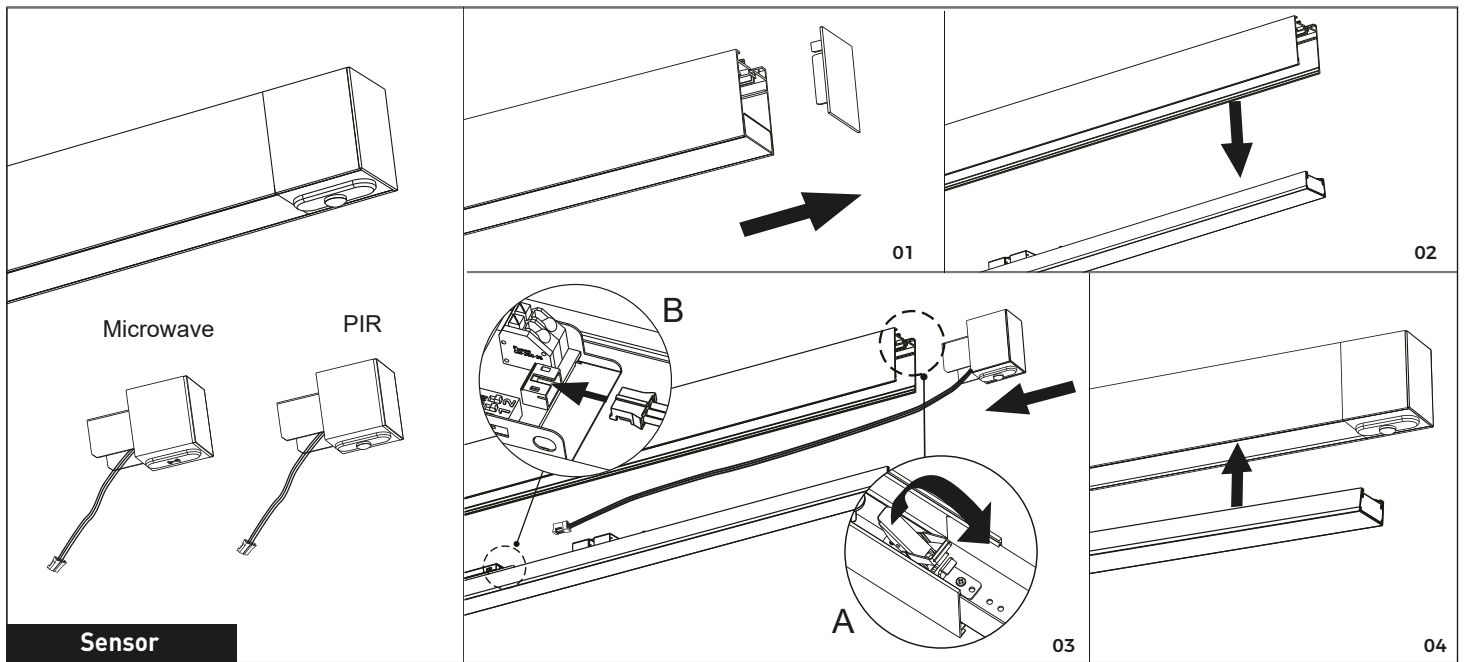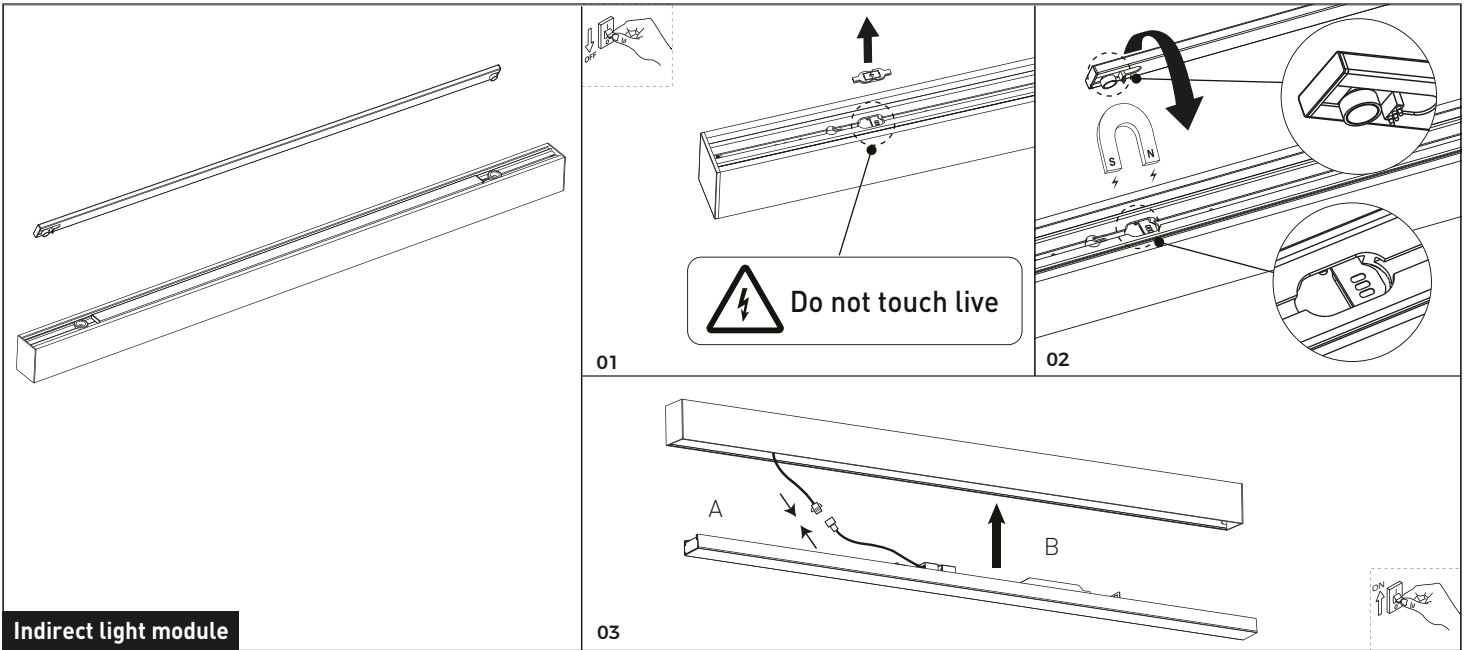



Circuit breakers

	B10	B16	C10	C16
1200/1500mm	17	28	29	46

Linkable qty

Input Voltage	Size	NX	NX	NX	NX
(230VAC)	1200mm	44(17W)	35(21W)	28(26W)	25(30W)
1.5mm ²	1500mm	35(21W)	30(25W)	24(31W)	20(36W)

CCT	EET
4000/5000/6500K	C
3000K	D

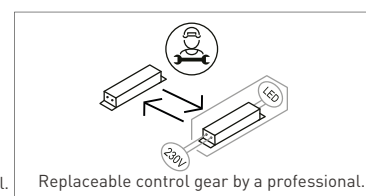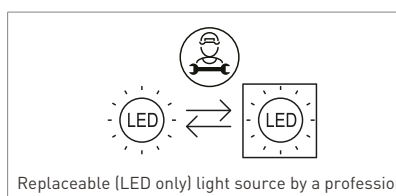

This product contains a light source of energy efficiency class <C>.(4000/5000/6500K)
This product contains a light source of energy efficiency class <D>.(3000K)

Replace method :

- Open the light module, loosen screws on driver and PCB board.
- To replace the LED module or power supply.
- After the installation is complete, install it again according to the original disassembly metho.

