


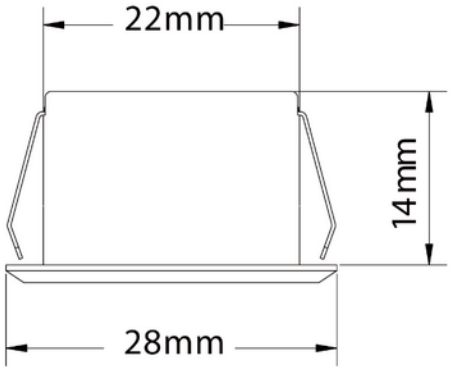

Capella 150lm 927 45° 1,1W WH 2m cable w/o driver

ELECTRICAL DATA	
Protection Class (system)	3
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP44
Outdoor	No
Operating temperature (°C)	-20 - 45

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	118
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	2700

PHOTOMETRIC DATA	
Color Code	827
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h) IEC 62717	L80B50: 50 000
MacAdam (SDCM)	2
Manufacturer (light source)	Philips
Forwrard Voltage LED (max tp=25) (V)	3.2
Driftspenning LED (min tp=65) (V)	2.8

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Max Output Voltage (V)	12
Dimming Minimum Level (%)	1.0
Dimming Phasecut Type	Leading / Trailing edge
IP (driver)	IP65
Expected Lifetime (driver) (h)	30000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
CC (forward voltage driver) (V)	6.0 - 12.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	50.0
Max load pr circuit - B10	35
Max load pr circuit - B16	56
Max load pr circuit - C10	74
Max load pr circuit - C16	118
Inrush current time (µs)	300.0
Inrush current Imax (A)	5.0

DIMENSIONS	
Width (product) (mm)	19.0
Heigth (product) (mm)	26.0

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Cottage, Residence
Mounting	Recessed, Floor, Furnishings, Furniture
Connection (system)	Mini connector 2m

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++

LIGHT DISTRIBUTION

