
FDV DOCUMENTATION
Acrux G2 Adj 750lm 927 8W 36° BK Phasecut IP54
Art.no: 2303-36-2



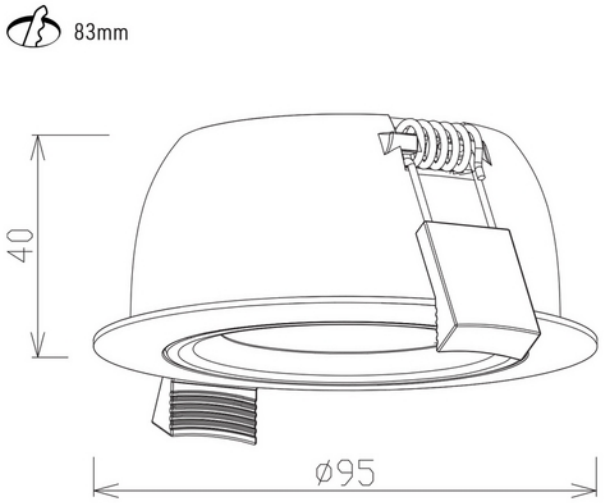

Acrux G2 Adj 750lm 927 8W 36° BK Phasecut IP54

CE 230V 50Hz IP54 IK03

F A↑G

SPECIFICATIONS	
Type of Dimming (system)	Phase-Cut
IK	IK03
Operating temperature (°C)	45
Color Code	927
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
Forwrard Voltage LED (max tp=25) (V)	40.0
Forward Voltage LED (min tp=65) (V)	30.0
Protection Class (driver)	2
Dimming (driver)	Phase-Cut
Constant current or voltage (CC or CV)	CC

SPECIFICATIONS	
CC (driver) [mA]	180
CC (forward voltage driver) (V)	40.0
Inrush current time (µs)	312.0
Inrush current Imax (A)	2.64
Heigth (product) (mm)	40.0
Weight (product) (kg)	0.34
Diameter (product) (mm)	95.0
Color	Black
RAL Code	RAL9005
Mounting	Recessed, Ceiling
Connection (system)	QuickConnect
Emergency light (h)	No Emergency light
Emergency light testing	N/A