PRODUCT DATA SHEET
Tania Mini 1450lm 927 36° 14,5W 1-circuit BK phasecut
Art.no: 3553-3-36-2



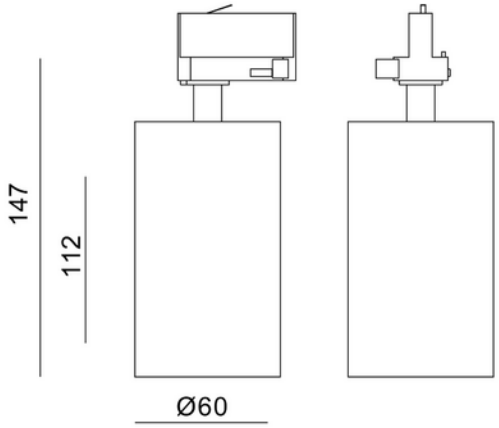

Tania Mini 1450lm 927 36° 14,5W 1-circuit BK phasecut

Tania Mini is a small spotlight in a contemporary design. Perfect for use at home and in other commercial settings. Choose between 1 or 3-circut connection. Front ring is sold separately. This version is with LED COB and no changeable lightbulb.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-20 - 40

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	73
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	2700
Color Code	927
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h) IEC 62717	L80B10: 100 000
MacAdam (SDCM)	3
Manufacturer (light source)	Bridgelux

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Max Output Voltage (V)	50
Dimming (driver)	Phase-Cut
Dimming Minimum Level (%)	1.0
Dimming Phasecut Type	Leading / Trailing edge
IP (driver)	IP65
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
CC (forward voltage driver) (V)	18.0 - 37.0
Output Current Tolerance (%)	5.0
Max load pr circuit - B10	125
Max load pr circuit - B16	200
Max load pr circuit - C10	125
Max load pr circuit - C16	200
Inrush current time (µs)	100.0
Inrush current Imax (A)	5.0

DIMENSIONS	
Width (product) (mm)	60.0
Heigth (product) (mm)	147.0

MATERIALS AND SURFACES	
Color	Black
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Cafe, Cottage, Hotel, Residence, Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 1-Circuit

ENERGY AND CERTIFICATIONS	
CE mark	Yes

LIGHT DISTRIBUTION

