FDV DOCUMENTATION
Lobus 4750lm 830 60° 30W GR 3-Circuit BI
Art.no: 7010-7-60-1



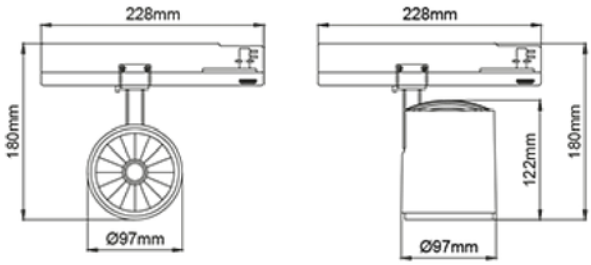

Lobus 4750lm 830 60° 30W GR 3-Circuit BI

SPECIFICATIONS	
Type of Dimming (system)	None
Operating temperature (°C)	35
Color Code	830
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
Protection Class (driver)	2
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	900
CC (forward voltage driver) (V)	40.0
Inrush current time (µs)	50.0
Inrush current Imax (A)	5.0

SPECIFICATIONS	
Length (product) (mm)	228.0
Width (product) (mm)	97.0
Heigth (product) (mm)	180.0
Weight (product) (kg)	0.841
Color	Grey
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

LIGHT DISTRIBUTION

