FDV DOCUMENTATION
Lobus 4050lm 930 30° 30W BK 3-Circuit BI DALI
Art.no: 7012-7-30-2-ddd



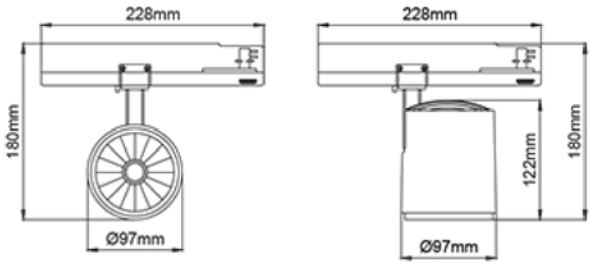

Lobus 4050lm 930 30° 30W BK 3-Circuit BI DALI

SPECIFICATIONS	
Type of Dimming (system)	DALI2
Operating temperature (°C)	35
Color Code	930
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
Forwrard Voltage LED (max tp=25) (V)	38.7
Forward Voltage LED (min tp=65) (V)	29.3
Protection Class (driver)	2
Dimming (driver)	DALI2
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	1050

SPECIFICATIONS	
CC (forward voltage driver) (V)	42.0
Inrush current time (µs)	50.0
Inrush current Imax (A)	5.0
Length (product) (mm)	260.0
Width (product) (mm)	97.0
Heigth (product) (mm)	180.0
Weight (product) (kg)	0.841
Color	Black
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit+dim

LIGHT DISTRIBUTION

