FDV DOCUMENTATION
Lobus 3750lm ArcticWhite 932 40° 30W GR 3-Circuit BI
Art.no: 7015-7-40-1



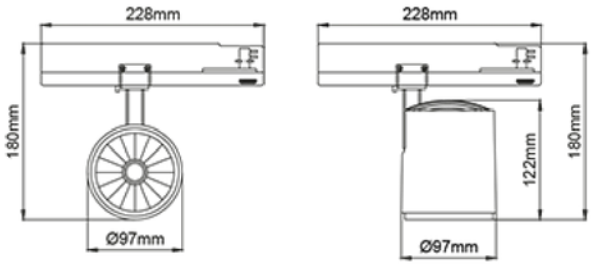

Lobus 3750lm ArcticWhite 932 40° 30W GR 3-Circuit BI

CE 230V 50Hz IP20

SPECIFICATIONS	
Type of Dimming (system)	None
Operating temperature (°C)	35
Color Code	935
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
Forwrard Voltage LED (max tp=25) (V)	34.8
Forward Voltage LED (min tp=65) (V)	16.7
Protection Class (driver)	2
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	900
CC (forward voltage driver) (V)	40.0

SPECIFICATIONS	
Inrush current time (µs)	50.0
Inrush current Imax (A)	5.0
Length (product) (mm)	228.0
Width (product) (mm)	97.0
Heigth (product) (mm)	180.0
Weight (product) (kg)	0.841
Color	Grey
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

LIGHT DISTRIBUTION

