FDV DOCUMENTATION
Lobus FreshFood 2600lm 824 30° 30W BK 3-Circuit BI
Art.no: 7016-7-30-2



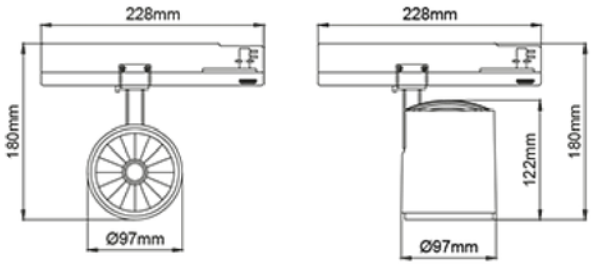

Lobus FreshFood 2600lm 824 30° 30W BK 3-Circuit BI

SPECIFICATIONS	
Type of Dimming (system)	None
Operating temperature (°C)	35
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
Forwrard Voltage LED (max tp=25) (V)	36.3
Forward Voltage LED (min tp=65) (V)	33.3
Protection Class (driver)	2
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	900
CC (forward voltage driver) (V)	40.0
Inrush current time (µs)	50.0

SPECIFICATIONS	
Inrush current Imax (A)	5.0
Length (product) (mm)	228.0
Width (product) (mm)	97.0
Heigth (product) (mm)	180.0
Weight (product) (kg)	0.841
Color	Black
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

LIGHT DISTRIBUTION

