**FDV DOCUMENTATION**
Lobus 4250lm 940 20° 30W BK 3-Circuit BI
Art.no: 7019-7-20-2






# Lobus 4250lm 940 20° 30W BK 3-Circuit BI

| SPECIFICATIONS | |
|---|---|
| Type of Dimming (system) | None |
| Operating temperature (°C) | 35 |
| Color Code | 940 |
| Lightsource Type | LED (built in) |
| Socket / Cap-Base | N/A |
| Lifetime (h) | L80B10: 100 000 |
| MacAdam (SDCM) | 3 |
| Forwrard Voltage LED (max tp=25) (V) | 36.7 |
| Forward Voltage LED (min tp=65) (V) | 32.7 |
| Protection Class (driver) | 2 |
| Constant current or voltage (CC or CV) | CC |
| CC (driver) [mA] | 900 |
| CC (forward voltage driver) (V) | 40.0 |

| SPECIFICATIONS | |
|---|---|
| Inrush current time (µs) | 50.0 |
| Inrush current Imax (A) | 5.0 |
| Length (product) (mm) | 228.0 |
| Width (product) (mm) | 97.0 |
| Heigth (product) (mm) | 180.0 |
| Weight (product) (kg) | 0.841 |
| Color | Black |
| Mounting | Track, Ceiling |
| Connection (system) | Track 3-Circuit |

## LIGHT DISTRIBUTION

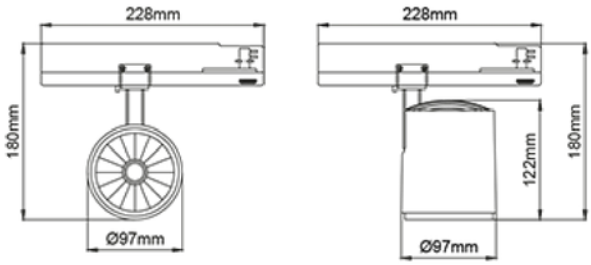