FDV DOCUMENTATION
Lobus 4250lm 940 30° 30W BK 3-Circuit BI DALI
Art.no: 7019-7-30-2-ddd



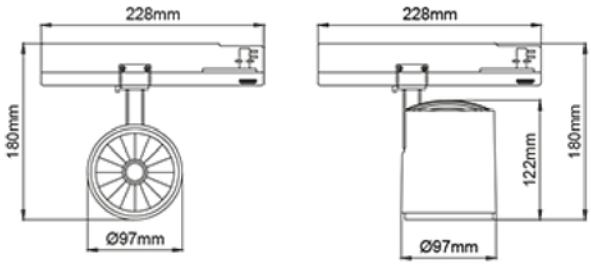

Lobus 4250lm 940 30° 30W BK 3-Circuit BI DALI

SPECIFICATIONS	
Type of Dimming (system)	DALI2
Operating temperature (°C)	35
Color Code	940
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
Protection Class (driver)	2
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	900
CC (forward voltage driver) (V)	40.0
Inrush current time (µs)	50.0
Inrush current Imax (A)	5.0

SPECIFICATIONS	
Length (product) (mm)	260.0
Width (product) (mm)	97.0
Heigth (product) (mm)	180.0
Weight (product) (kg)	0.841
Color	Black
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit+dim