




## FDV SPEC SHEET

Sport-X  
Art. no: 102482-09-2-ddd

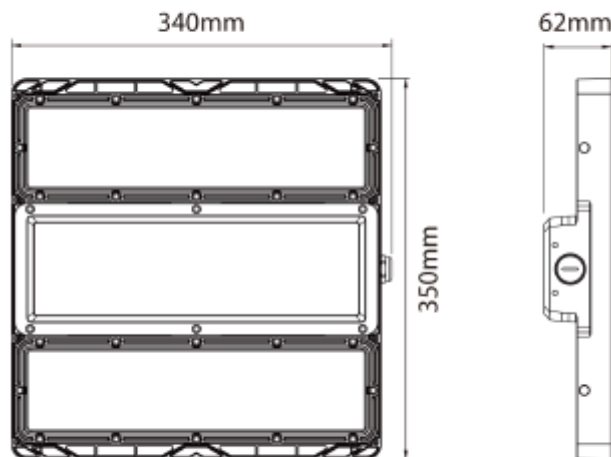

## Sport-X



Art. no: 102482-09-2-ddd

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	21950
Beam Angle:	85°
CCT (Color Temperature):	4000
CRI / Ra:	80
MacAdam (SDCM):	3
Lens (Diffuser):	Clear

### MOUNTING / CONNECTION

Mounting:	Suspended, Ceiling
-----------	--------------------

### ELECTRICAL DATA

Dimming:	DALI2
Dimming Output Type:	Amplitude Modulation
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	0,003
Stroboscopic effect metric (SVM) <	0,008
System Power [W]:	150
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	5
Max load pr circuit - B16:	8
Max load pr circuit - C10:	8
Max load pr circuit - C16:	13
Leakage current [mA]:	0,75
Inrush current Imax [A]:	125
Inrush current time [µs]:	200
Socket / Cap-Base:	N/A



## FDV SPEC SHEET

Sport-X  
Art. no: 102482-09-2-ddd



PRODUCT	
Ingress Protection:	IP66
Impact Protection:	IK10
Corrosion Class:	C3
Operating Temperature [°C]:	-30 - 50
Lifetime [h]:	L80B10: 100 000
Color:	Black
RAL:	RAL9017
Length [mm]:	340
Height [mm]:	350
Width [mm]:	62
Weight [kg]:	4,1
Housing Material :	Aluminium