





FDV SPEC SHEET

Rod Maxi C

Art. no: 102321-36-3

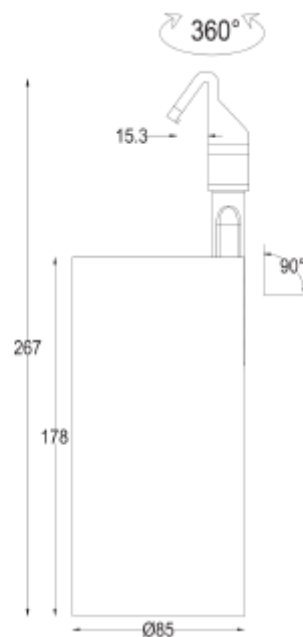

Rod Maxi C



Art. no: 102321-36-3

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3375
Lumen LED (tc=25):	3881
Beam Angle:	36
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Clear
UGR (<=):	19

MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Mounting:	Hook



FDV SPEC SHEET

Rod Maxi C

Art. no: 102321-36-3



PRODUCT	
Ingress Protection:	IP20
Impact Protection:	IK02
Operating Temperature [°C]:	-20 - 45
Lifetime [h]:	L80: 100 000
Color:	White
RAL:	RAL9010
Height [mm]:	178
Diameter [mm]:	85
Housing Material :	Aluminium
Diffuser Material:	Aluminium
Material 2:	Polycarbonate

ELECTRICAL DATA	
Dimming:	Phase-Cut
Flickerfree:	Yes
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <	0,4
System Power [W]:	27
System Voltage [V]:	230V 50Hz
Dimming Phasecut Type:	Trailing edge
Protection Class:	2
Max load pr circuit - B10:	50
Max load pr circuit - B16:	80
Max load pr circuit - C10:	50
Max load pr circuit - C16:	80
Leakage current [mA]:	5
Inrush current Imax [A]:	5
Inrush current time [µs]:	100
Socket / Cap-Base:	N/A
Current Output [mA]:	700
Voltage Forward Min [V]:	33
Voltage Forward Max [V]:	38
Emergency light [h]:	No Emergency light