




FDV SPEC SHEET

Sport-X
Art. no: 102484-08-2-ddd

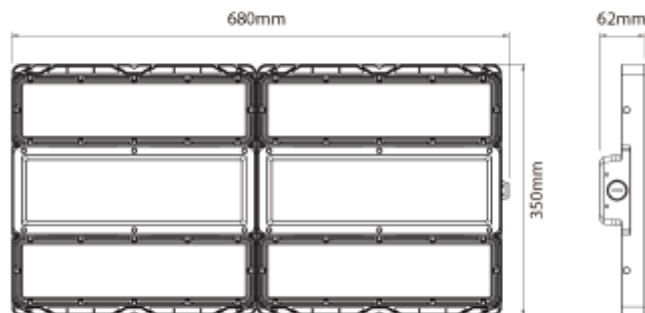

Sport-X



Art. no: 102484-08-2-ddd

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 36450 |
| Lumen LED (tc=25): | 38400 |
| Beam Angle: | 55° |
| CCT (Color Temperature): | 4000 |
| CRI / Ra: | 80 |
| Color Code: | 840 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Clear |

MOUNTING / CONNECTION

| | |
|-----------|--------------------|
| Mounting: | Suspended, Ceiling |
|-----------|--------------------|

ELECTRICAL DATA

| | |
|------------------------------------|----------------------|
| Dimming: | DALI2 |
| Dimming Output Type: | Amplitude Modulation |
| Standby power Psb (W) <: | 0,5 |
| Flicker metric (Pst LM) <: | 0,003 |
| Stroboscopic effect metric (SVM) < | 0,011 |
| System Power [W]: | 240 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 2 |
| Max load pr circuit - B16: | 4 |
| Max load pr circuit - C10: | 4 |
| Max load pr circuit - C16: | 7 |
| Leakage current [mA]: | 0,75 |
| Inrush current Imax [A]: | 150 |
| Inrush current time [µs]: | 300 |
| Socket / Cap-Base: | N/A |



FDV SPEC SHEET

Sport-X

Art. no: 102484-08-2-ddd



| PRODUCT | |
|-----------------------------|-----------------|
| Ingress Protection: | IP66 |
| Impact Protection: | IK10 |
| Corrosion Class: | C3 |
| Operating Temperature [°C]: | -30 - 50 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | Black |
| RAL: | RAL9017 |
| Length [mm]: | 680 |
| Height [mm]: | 62 |
| Width [mm]: | 350 |
| Weight [kg]: | 7,9 |
| Housing Material : | Aluminium |