
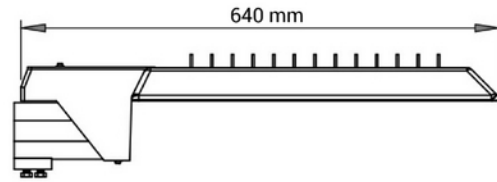


**PRODUCT DATA SHEET**

Via 10 407lm 740 79W Asymmetric IP66 GR

Art.no: 714-2-04-1

*Lighting Solutions*

Via 10 407lm 740 79W Asymmetric IP66 GR



Via is a luminaire for post mounting. We have developed this luminaire with an asymmetrical reflector giving a wide spread light, see light distribution diagram below. Via has a post fixation opening with a diameter of 60mm. The luminaire has an IP66 classification and this guarantees that it will withstand very demanding conditions.

ELECTRICAL DATA	
Protection Class (system)	1
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP66
Outdoor	Yes
Operating temperature (°C)	-25 - 40

**PRODUCT DATA SHEET**

Via 10 407lm 740 79W Asymmetric IP66 GR

Art.no: 714-2-04-1

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	112
CRI / Ra (>=)	70
CCT (Color Temperature) (K)	4000
Color Code	740
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L90B10: 100 000
Manufacturer (light source)	Osram

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1 or 2
Max Output Voltage (V)	140
IP (driver)	IP20
Expected Lifetime (driver) (h)	100000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	300 - 1050
CC (forward voltage driver) (V)	40.0 - 114.2
Output Current Tolerance (%)	7.5
Current Ripple (%)	5.0
Max load pr circuit - B10	3
Max load pr circuit - B16	7
Max load pr circuit - C10	6
Max load pr circuit - C16	14
Leakage current (mA)	0.5
Inrush current time (μ s)	280.0
Inrush current I _{max} (A)	56.0

DIMENSIONS	
Length (product) (mm)	640.0
Width (product) (mm)	242.0
Height (product) (mm)	146.0
Weight (product) (kg)	7.0



PRODUCT DATA SHEET

Via 10 407lm 740 79W Asymmetric IP66 GR

Art.no: 714-2-04-1



Lighting Solutions

MATERIALS AND SURFACES	
Color	Grey

INSTALLATION AND CONNECTION	
Areas of use	Outdoor, Sports areas, Street
Mounting	Wall, Mast
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++

LIGHT DISTRIBUTION

